



GROWING TOGETHER

TECHNICAL & DATABOOK 2021



INDUSTRIAL & CONSTRUCTION TIRES





2021 Technical DataBook

INDUSTRIAL & CONSTRUCTION TIRES



Range



FORKLIFT

Radial Bias Solid



LIFTMAX LM 81

Pag. 40



FL 252

Pag. 44



MP 590

Pag. 46



MAGLIFT ECO

Pag. 88



MAGLIFT PREMIUM

Pag. 94



MAGLIFT ECO RIB

Pag. 96



PL 801

Pag. 48



POWER TRAX HD

Pag. 58



POWER TRAX HD SMOOTH

Pag. 66



SNOW GRIP

Pag. 68



SUPER TRAX HD

Pag. 70



MAGLIFT

Pag. 72



Range



BACKHOE LOADER

Radial Bias



MULTIMAX MP 522

Pag. 100



RT 747 AGRO INDUSTRIAL

Pag. 106



BK 826

Pag. 108



CON STAR

Pag. 132



EM 937 (L)

Pag. 136



TR 459

Pag. 140



TR 461

Pag. 112



MP 570

Pag. 114



AT 603

Pag. 116



TR 463

Pag. 146



XL GRIP

Pag. 148



AT 621

Pag. 120



AT 625

Pag. 128



BK 6060

Pag. 130



Range



COMPACT LOADER

Radial Bias



MULTIMAX MP 522

Pag. 154



RT 747 AGRO INDUSTRIAL

Pag. 160



AT 603

Pag. 162



SNOW RIDE (A)

Pag. 186



AT 621

Pag. 166



AT 625

Pag. 174



CON STAR

Pag. 176



MP 570

Pag. 180



MP 590

Pag. 182



MP 600



Pag. 184



Range



LOADER

 Radial  Bias



EARTHMAX SR 22

 Pag. 190



EARTHMAX SR 25 PLUS

 Pag. 192



EARTHMAX SR 31

 Pag. 194



XL GRIP

 Pag. 212



SNOW RIDE (B)

 Pag. 218



SNOW RIDE PLUS

 Pag. 220



GR 288

 Pag. 196



EM 936 LOADER SPECIAL

 Pag. 198



EM 937

 Pag. 200



ROCK STAR (L-4)

 Pag. 222



LOADER PLUS (L-3)

 Pag. 204



BK-LOADER 53

 Pag. 208



ROCK GRIP

 Pag. 210



Range



COMPACTOR

Bias



PAC MASTER

Pag. 226



PAC MASTER PLUS

Pag. 230



TR 387

Pag. 232



TR 387 IND

Pag. 238



TR 390

Pag. 240



TR 390 IND

Pag. 242



TR 391

Pag. 244

EXCAVATOR

Bias



EM 934

Pag. 248



EM 936

Pag. 250



EM 936 SUPER

Pag. 254



EM 938

Pag. 256



EM 939

Pag. 258



TR 678

Pag. 260



TR 678 IND

Pag. 262



MP 570

Pag. 264



Range



GRADER

 Radial



EARTHMAX SR 22


 Pag. 268



EARTHMAX SR 25 PLUS

 Pag. 270

SKID STEER

 Bias



GIANT TRAX

 Pag. 274



MUD POWER HD

 Pag. 276



JUMBO TRAX HD

 Pag. 278



POWER TRAX HD (SS)

 Pag. 280



SKID POWER

 Pag. 282



SKID POWER (CHEVRON)

 Pag. 286



SKID POWER HD

 Pag. 288



SKID POWER SK

 Pag. 298



SKID POWER PLUS

 Pag. 300



Range



SKID STEER

Bias



SNOW RIDE (A)

Pag. 302



SURE TRAX HD

Pag. 304



MULTIMAX MP 522

Pag. 308



MULTIMAX MP 527

Pag. 314



MULTIMAX MP 529

Pag. 320



RT 747 AGRO INDUSTRIAL

Pag. 322



AS 504

Pag. 324



CON STAR

Pag. 376



GRIP STAR

Pag. 380



LIFT STAR PLUS

Pag. 382



MP 567

Pag. 384

TELEHANDLER

Radial Bias





Range



TELEHANDLER

Bias



MP 590

Pag.396



MP 600

Pag. 398



TR 461

Pag. 402

LIGHT TRUCK

Bias



LT TR 182

Pag. 406



TUF LUG

Pag. 408



Range



LOW PLATFORM

Bias



IT 400



Pag. 412



LP 450



Pag. 416

TRAILER

Radial

Bias



LIFTMAX LM 63



Pag. 420



PORTMAX PT 93



Pag. 422



BK 6060



Pag. 424



CON TRAILER



Pag. 426



FLOTATION TR 675



Pag. 428



INDUSTRIAL RIB F3



Pag. 432



MULTI RIB



Pag. 434



RIB F3



Pag. 436



SAND KING



Pag. 438



Range



TRAILER

Radial Bias



SAND MASTER

Pag. 440



SAND STAR

Pag. 442



SUPER SAND

Pag. 444



TR 678 IND

Pag. 460



TUF LUG

Pag. 446



RIB 324

Pag. 448



BK 826

Pag. 450



COLT

Pag. 454



TR 387 IND

Pag. 456



TR 678

Pag. 458



Range



MILITARY TRUCK

Bias



MT 612

Pag. 464



MT 617

Pag. 466

UNIVERSAL VEHICLE MULTIPURPOSE

Radial Bias



EARTHMAX SR 33

Pag. 470



EARTHMAX SR 33 PLUS

Pag. 472



MULTIMAX MP 513

Pag. 474



MULTIMAX MP 540

Pag. 476



MP 567

Pag. 478



MP 585

Pag. 486



MP 590

Pag. 488



MP 600

Pag. 490



MT 612

Pag. 492



Range

BKT Port Range



MOBILE CRANE

 Radial  Bias



AIROMAX AM 27

 Pag. 496



AIROMAX AM 543

 Pag. 498



CRANE SPECIAL

 Pag. 500



XL GRIP (IND-3)

 Pag. 506



RM 2002

 Pag. 502

RTG CRANE

 Bias





BKT Port Range



EMPTY CONTAINER HANDLER

Radial Bias



EM 937 (IND-3)

Radial Bias
Pag. 512



XL GRIP (IND-3)

Radial Bias
Pag. 514



ROCK GRIP IND-4 (ECH)

Radial Bias
Pag. 516



ROCK STAR (IND-4)

Radial Bias
Pag. 518



POWER TRAX HD

Radial Bias
Pag. 520



POWER TRAX HD SMOOTH

Radial Bias
Pag. 522

REACH STACKER

Radial Bias



PORTMAX PM 90

Radial Bias
Pag. 526



ROCK GRIP IND4 (RS)

Radial Bias
Pag. 528



SM 54 (L4-S)

Radial Bias
Pag. 530



SM 54 M (L-4S)

Radial Bias
Pag. 532



CONTAINER KING

Radial Bias
Pag. 534



PORT KING PLUS

Radial Bias
Pag. 536



PORT KING CLASSIC

Radial Bias
Pag. 538



SM 55 (L-5S) (IND-5)

Radial Bias
Pag. 540



BKT Port Range



STRADDLE CARRIER

 Radial



PORTMAX PM 93 PLUS

 Pag. 544



TERMINAL TRACTOR

 Radial



PORTMAX PT 93

 Pag. 548



BKT Port Range



TOW TRACTOR

 Radial



LIFTMAX LM 63



Pag. 552



Legend of icons

TECHNOLOGIES

 Deep Tread	 Extra Deep Tread	 Heavy Duty	 High Speed	 Reinforced Carcass
 Special Antistatic Compound	 Special Compound	 Strong Casing		

PERFORMANCE

 Comfort	 Cut and Chip Resistance	 Cut Resistance	 Durability	 Fuel Economy
 Handling & Comfort	 Hard Surfaces	 Heat Resistance	 High Puncture Resistance	 High Load Capacity
 Low Rolling Resistance	 On/Off Road	 Road Oriented	 Stability	 Traction



How to read technical data

Tire size

This data indicates tire size according to international standards.

Type

This parameters indicates whether the tire is tubeless (TL) or the type of air chamber mounted.

STAR RATING

Star rating is a symbol, used for OTR tires, to identify a reference inflation pressure, for a given tire size and service condition, and its corresponding load.

PR

The PR parameter states for "Ply Rating" and is an expression of the tire's load capacity, primarily used for conventional tires.

LI/SS

LOAD INDEX / SPEED SYMBOL

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

Speed Symbol: the speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

Version

The Version parameter indicates whether the tyre is a standard version or has specific characteristics for a different use.



S.W.

SECTION WIDTH

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

OVERALL WIDTH

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.



O.W.

OVERALL DIAMETER

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.



O.D.

SLR - STATIC LOADED RADIUS

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.



SLR

ROLLING CIRCUMFERENCE

indicates the distance the tire travels in one revolution




RC

RIM Rec. parameter indicates the recommended rim size for the tire according to ETRTO.


RIM Alt. parameter indicates the alternative rim size for the tire according to technical standard.



RIM Rec./Alt.



FORKLIFT




Radial

LIFTMAX LM 81

LIFTMAX LM 81 has been specially designed for forklift equipment in material handling and industrial applications. This All Steel radial tire offers lower vibration, and greater stability as well as increased durability. The special antistatic tread compound provides excellent wear resistance even under the most demanding operating conditions.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W.	O.D.	SLR	RC	RIM	
						(mm)	(mm)	(mm)	(mm)	Rec.	Alt.
	180/70 R 8	TL	-	125 A5	STD	170	453	-	-	4.33 R	-
	5.00 R 8	TL	-	111 A5	STD	138	471	-	-	3.00 D	3.25 I, 3.75 I
Ø 9"	6.00 R 9	TL	-	121 A5	STD	160	540	-	-	4.00 E	-
Ø 10"	225/75 R 10	TL	-	142 A5	STD	220	595	-	-	6.50 F	-
	6.50 R 10	TL	-	128 A5	STD	178	590	-	-	5.00 F; 5.50 F	-
Ø 12"	250/75 R 12	TL	-	152 A5	STD	260	680	-	-	8.0	-
	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-
Ø 15"	225/75 R 15	TL	-	149 A5	STD	226	712	-	-	7.00	-
	250/70 R 15	TL	-	153 A5	STD	230	735	-	-	7.00	-



FORKLIIFT





FORKLIFT

Radial

LIFTMAX LM 81



LIFTMAX LM 81 has been specially designed for forklift equipment in material handling and industrial applications. This All Steel radial tire offers lower vibration, and greater stability as well as increased durability. The special antistatic tread compound provides excellent wear resistance even under the most demanding operating conditions.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
180/70 R 8	TL	-	125 A5	STD	170	453	-	-	4.33 R	-	25	1650	
											10		
5.00 R 8	TL	-	111 A5	STD	138	471	-	-	3.00 D	3.25 I; 3.75 I	25	1090	
											10		
Ø 9"	6.00 R 9	TL	-	121 A5	STD	160	540	-	-	4.00 E	-	10.00	1450
												25	
Ø 10"	225/75 R 10	TL	-	142 A5	STD	220	595	-	-	6.50 F	-	10.00	2650
												25	
6.50 R 10	TL	-	128 A5	STD	178	590	-	-	5.00 F; 5.50 F	-	10.00	1800	
											25		
Ø 12"	250/75 R 12	TL	-	152 A5	STD	260	680	-	-	8.0	-	10.00	3550
												25	
7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	10	2240	
											25		
Ø 15"	225/75 R 15	TL	-	149 A5	STD	226	712	-	-	7.00	-	10	3250
												25	
250/70 R 15	TL	-	153 A5	STD	230	735	-	-	7.00	-	10.00	3650	
											25		

STD: Standard

Technologies



Special Antistatic Compound

Performance



Stability



Durability





LIFTMAX LM 81

Ø 15"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	10
Ø 15"	7.00 R 15	TL	-	143 A5	STD	199	745	-	-	5.50	5.00	25	2725
	7.50 R 15	TL	-	146 A5	STD	212	778	-	-	6.00	6.5	25	3000
	8.25 R 15	TL	-	153 A5	STD	234	836	-	-	6.5	7.0	25	3650
Ø 20"	10.00 R 20	TL	-	166 A5	STD	275	1066	-	-	7.50	-	25	5300
	11.00 R 20	TL	-	170 A5	STD	288	1092	-	-	8.00	8.5	25	6000
	12.00 R 20	TL	-	176 A5	STD	314	1134	-	-	8.50	8.0	25	7100
Ø 24"	12.00 R 24	TT	-	178 A5	STD	310	1235	-	-	8.50	9.0	25	7500
	14.00 R 24	TL	-	193 A5	STD	388	1415	-	-	10.00 W	10.0, 10.00 WA	25	11500

Technologies



Special Antistatic Compound

Performance



Stability



Durability

STD: Standard



FORKLIFT

Bias

FL 252



FL 252 is a tire suitable for hay harvesting applications with rotor rakes/tedders as well as for logistic operations using forklifts. This tire provides excellent durability while the specific tread pattern ensures maximum stability during lifting operations.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
Ø 8"	5.00 - 8	TT	8	-	STD	138	480	-	-	3.00 D	3.25 I	km/h / bar	8.30	
												25 LOAD WHEEL	1235	
												25 STEER WHEEL	950	
												10 OTHER VEHICLES	1235	
												25 OTHER VEHICLES	950	
												STATIC SIDE LOADER	1435	
Ø 8"	5.00 - 8	TT	10	-	STD	138	480	-	-	3.00 D	3.25 I	km/h / bar	10.00	
												25 LOAD WHEEL	1415	
												25 STEER WHEEL	1090	
												10 OTHER VEHICLES	1415	
												25 OTHER VEHICLES	1090	
												STATIC SIDE LOADER	1645	
Ø 9"	6.00 - 9	TT	10	-	STD	170	550	-	-	4.00 E	-	km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
												STATIC SIDE LOADER	1995	
Ø 10"	6.50 - 10	TT	10	-	STD	185	605	-	-	5.00 F	5.50 F	km/h / bar	7.80	
												25 LOAD WHEEL	1950	
												25 STEER WHEEL	1500	
												10 OTHER VEHICLES	1950	
												25 OTHER VEHICLES	1500	
												STATIC SIDE LOADER	2265	
Ø 12"	7.00 - 12	TT	14	-	STD	190	688	-	-	5.00 S	-	km/h / bar	9.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
												STATIC SIDE LOADER	3200	
Ø 15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	720	-	-	7.00	7 BD	km/h / bar	10.00	
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												10 OTHER VEHICLES	3900	
												25 OTHER VEHICLES	3000	
												STATIC SIDE LOADER	4530	
	Ø 15"	8.25 - 15	TT	14	-	STD	240	855	-	-	6.50	7.0	km/h / bar	8.00
													25 LOAD WHEEL	4225
													25 STEER WHEEL	3250
													10 OTHER VEHICLES	4225
													25 OTHER VEHICLES	3250
													STATIC SIDE LOADER	4910

Performance



Stability



Durability



Cut and Chip Resistance

STD: Standard



FORKLIFT

Bias

MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-	5.50	
												40 DW	4875
												30 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-	7.50	
												40 DW	5800
												30 DW	6500

STD: Standard

Performance



Stability



Traction



Durability





FORKLIFT

Bias

PL 801



PL 801 has been specially designed for hay harvesting applications with rotor rakes/ tedders and for logistics operations with forklifts. It features excellent stability as well as high cut and chip resistance. PL 801 ensures an extended tire life-cycle.

Ø 5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 5"	23 X 5 23 X 5 (- 13)	TT	6	-	STD	154	640	-	-	3.75 P	-		km/h / bar	5.30
													25 LOAD WHEEL	1495
													25 STEER WHEEL	1150
													10 OTHER VEHICLES	1495
													25 OTHER VEHICLES	1150
STATIC SIDE LOADER	1735													
Ø 8"	18 X 7 - 8 (180/70 - 8)	TT	14	-	STD	173	470	-	-	4.33 R	5.00 F		km/h / bar	9.00
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
													10 OTHER VEHICLES	1885
													25 OTHER VEHICLES	1450
	STATIC SIDE LOADER	2190												
	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F		km/h / bar	10.00
													25 LOAD WHEEL	2145
													25 STEER WHEEL	1650
													10 OTHER VEHICLES	2145
													25 OTHER VEHICLES	1650
	STATIC SIDE LOADER	2490												
	5.00 - 8	TT	8	-	STD	135	468	-	-	3.00 D	3.25 I		km/h / bar	8.30
													25 LOAD WHEEL	1235
													25 STEER WHEEL	950
10 OTHER VEHICLES													1235	
25 OTHER VEHICLES													950	
STATIC SIDE LOADER	1435													
5.00 - 8	TT	10	-	STD	135	468	-	-	3.00 D	3.25 I		km/h / bar	10.00	
												25 LOAD WHEEL	1415	
												25 STEER WHEEL	1090	
												10 OTHER VEHICLES	1415	
												25 OTHER VEHICLES	1090	
STATIC SIDE LOADER	1645													

STD: Standard

Performance



Stability



Durability



Cut and Chip Resistance





Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
21 X 8 - 9 (200/75 - 9)	TT	14	-	STD	200	535	-	-	6.00 E	7.00 E		km/h / bar	9.00	
												25 LOAD WHEEL	2535	
												25 STEER WHEEL	1950	
												10 OTHER VEHICLES	2535	
												25 OTHER VEHICLES	1950	
STATIC SIDE LOADER	2945													
21 X 8 - 9 (200/75 - 9)	TT	16	-	STD	200	535	-	-	6.00 E	7.00 E		km/h / bar	10.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
6.00 - 9	TT	12	-	STD	157	543	-	-	4.00 E	-		km/h / bar	10.00	
												25 LOAD WHEEL	1885	
												25 STEER WHEEL	1450	
												10 OTHER VEHICLES	1885	
												25 OTHER VEHICLES	1450	
STATIC SIDE LOADER	2190													
6.00 - 9	TT	10	-	STD	157	543	-	-	4.00 E	-		km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
6.00 - 9	TT	10	-	SPL	157	543	-	-	4.00 E	-		km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
Ø 10"	6.50 - 10	TT	10	-	STD	185	595	-	-	5.00 F	5.50 F		km/h / bar	7.80
													25 LOAD WHEEL	1950
													25 STEER WHEEL	1500
													10 OTHER VEHICLES	1950
													25 OTHER VEHICLES	1500
													STATIC SIDE LOADER	2265

STD: Standard - SPL: Special

Performance



Stability



Durability



Cut and Chip Resistance





Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
7.00 - 12	TT	12	-	STD	189	692	-	-	5.00 S	-		km/h / bar	8.50	
												25 LOAD WHEEL	2680	
												25 STEER WHEEL	2060	
												10 OTHER VEHICLES	2680	
												25 OTHER VEHICLES	2060	
STATIC SIDE LOADER	3110													
7.00 - 12	TT	14	-	STD	189	692	-	-	5.00 S	-		km/h / bar	9.00	
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
Ø 15"	250 - 15 (250/70 - 15)	TT	20	-	STD	235	745	-	-	7.50 BD	7.0; 7.5	km/h / bar	10.00	
												25 LOAD WHEEL	5040	
												25 STEER WHEEL	3875	
												10 OTHER VEHICLES	5040	
												25 OTHER VEHICLES	3875	
STATIC SIDE LOADER	5850													
250 - 15 (250/70 - 15)	TT	16	-	STD	235	745	-	-	7.50 BD	7.0; 7.5		km/h / bar	8.30	
												25 LOAD WHEEL	4355	
												25 STEER WHEEL	3350	
												10 OTHER VEHICLES	4355	
												25 OTHER VEHICLES	3350	
STATIC SIDE LOADER	5060													
300 - 15 (315/70 - 15)	TT	18	-	STD	295	840	-	-	8.00 BD	8.0		km/h / bar	7.50	
												25 LOAD WHEEL	5850	
												25 STEER WHEEL	4500	
												10 OTHER VEHICLES	5850	
												25 OTHER VEHICLES	4500	
STATIC SIDE LOADER	6795													
5.50 - 15	TT	8	-	STD	157	670	-	-	5.50	4.50 E DT; 4.50 E SDC		km/h / bar	7.30	
												25 LOAD WHEEL	1950	
												25 STEER WHEEL	1445	
												10 OTHER VEHICLES	1950	
												25 OTHER VEHICLES	1445	
STATIC SIDE LOADER	2180													
7.00 - 15 (29 X 8 - 15)	TT	12	-	STD	200	750	-	-	5.5	4.33 R; 5.0		km/h / bar	8.30	
												25 LOAD WHEEL	3070	
												25 STEER WHEEL	2360	
												10 OTHER VEHICLES	3070	
												25 OTHER VEHICLES	2360	
STATIC SIDE LOADER	3565													

STD: Standard

Performance



Stability



Durability



Cut and Chip Resistance





Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar	8.60	9.00
7.00 - 15 (30 X 8 - 15)	TT	12	-	STD	206	775	-	-	6.0	5.50 BD; 5.5		km/h / bar	8.60	9.00	
												25 LOAD WHEEL	2835	-	
												25 STEER WHEEL	2395	-	
												10 OTHER VEHICLES	2395	-	
												25 OTHER VEHICLES	1760	-	
												STATIC SIDE LOADER	-	3865	
7.00 - 15 (30 X 8 - 15)	TT	14	-	STD	206	775	-	-	6.0	5.50 BD; 5.5		km/h / bar	10.00	10.30	
												25 LOAD WHEEL	3095	-	
												25 STEER WHEEL	2615	-	
												10 OTHER VEHICLES	2615	-	
												25 OTHER VEHICLES	1920	-	
												STATIC SIDE LOADER	-	4225	
7.50 - 15	TT	12	-	STD	220	785	-	-	6.0	6.00 S; 6.5		km/h / bar	8.00		
												25 LOAD WHEEL	3445		
												25 STEER WHEEL	2650		
												10 OTHER VEHICLES	3445		
												25 OTHER VEHICLES	2650		
												STATIC SIDE LOADER	4000		
7.50 - 15 (7.50 - 15 (32" OD))	TT	14	-	STD	220	814	-	-	6.0	6.00 S; 6.5		km/h / bar	9.20	9.70	
												25 LOAD WHEEL	3430	-	
												25 STEER WHEEL	2900	-	
												10 OTHER VEHICLES	2900	-	
												25 OTHER VEHICLES	2130	-	
												STATIC SIDE LOADER	-	4685	
7.50 - 15	TT	14	-	STD	220	785	-	-	6.0	6.00 S; 6.5		km/h / bar	9.30		
												25 LOAD WHEEL	3640		
												25 STEER WHEEL	2800		
												10 OTHER VEHICLES	3640		
												25 OTHER VEHICLES	2800		
												STATIC SIDE LOADER	4230		
8.15 - 15 (28 X 9 - 15)	TT	12	-	STD	215	720	-	-	7.0	7.00 BD		km/h / bar	8.30		
												25 LOAD WHEEL	3445		
												25 STEER WHEEL	2650		
												10 OTHER VEHICLES	3445		
												25 OTHER VEHICLES	2650		
												STATIC SIDE LOADER	4000		
8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	215	720	-	-	7.0	7.00 BD		km/h / bar	10.00		
												25 LOAD WHEEL	3900		
												25 STEER WHEEL	3000		
												10 OTHER VEHICLES	3900		
												25 OTHER VEHICLES	3000		
												STATIC SIDE LOADER	4530		

STD: Standard

Performance



Stability



Durability



Cut and Chip Resistance



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
										km/h / bar		
8.25 - 15	TT	14	-	STD	236	854	-	-	6.5	6.0; 7.0	25 LOAD WHEEL	4225
											25 STEER WHEEL	3250
											10 OTHER VEHICLES	4225
											25 OTHER VEHICLES	3250
											STATIC SIDE LOADER	4910
8.25 - 15	TT	12	-	STD	236	854	-	-	6.5	6.0; 7.0	25 LOAD WHEEL	3900
											25 STEER WHEEL	3000
											10 OTHER VEHICLES	3900
											25 OTHER VEHICLES	3000
											STATIC SIDE LOADER	4530

Performance



Stability



Durability



Cut and Chip Resistance

STD: Standard





FORKLIFT

Bias

POWER TRAX HD



POWER TRAX HD is a premium bias-ply tire that is specially designed for forklift equipment in industrial applications. The deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut, chip and tear resistance suitable for rough and hard concrete surface. The specially designed rim guard ensures protection against flats and wheel damages in the rim flange area.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
Ø 8"	18 X 7 - 8 (180/70 - 8)	TT	16	-	STD	173	470	-	-	4.33 R	5.00 F	km/h / bar	10.00	
												25 LOAD WHEEL	2145	
												25 STEER WHEEL	1650	
												10 OTHER VEHICLES	2145	
												25 OTHER VEHICLES	1650	
STATIC SIDE LOADER	2490													
Ø 8"	5.00 - 8	TT	10	-	STD	145	480	-	-	3.00 D	3.25 I	km/h / bar	10.00	
												25 LOAD WHEEL	1415	
												25 STEER WHEEL	1090	
												10 OTHER VEHICLES	1415	
												25 OTHER VEHICLES	1090	
STATIC SIDE LOADER	1645													
Ø 9"	6.00 - 9	TT	10	-	STD	166	543	-	-	4.00 E	-	km/h / bar	8.50	
												25 LOAD WHEEL	1715	
												25 STEER WHEEL	1320	
												10 OTHER VEHICLES	1715	
												25 OTHER VEHICLES	1320	
STATIC SIDE LOADER	1995													
Ø 10"	23 X 9 - 10 (225/75 - 10)	TT	20	-	STD	235	590	-	-	6.50 F	-	km/h / bar	10.00	
												25 LOAD WHEEL	3445	
												25 STEER WHEEL	2650	
												10 OTHER VEHICLES	3445	
												25 OTHER VEHICLES	2650	
	STATIC SIDE LOADER	4000												
	Ø 10"	23 X 9 - 10 (225/75 - 10)	TT	18	-	STD	235	590	-	-	6.50 F	-	km/h / bar	9.00
													25 LOAD WHEEL	3160
													25 STEER WHEEL	2430
													10 OTHER VEHICLES	3160
													25 OTHER VEHICLES	2430
	STATIC SIDE LOADER	3670												
	Ø 10"	6.50 - 10	TT	10	-	STD	193	595	278	1774	5.00 F	5.50 F	km/h / bar	7.80
													25 LOAD WHEEL	1950
													25 STEER WHEEL	1500
10 OTHER VEHICLES													1950	
25 OTHER VEHICLES													1500	
STATIC SIDE LOADER	2265													

Technology



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance

STD: Standard - IMP: Implement



FORKLIFT

POWER TRAX HD

Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
6.50 - 10	TT	12	-	STD	193	595	278	1774	5.00 F	5.50 F		9.00		
												25 LOAD WHEEL	2145	
												25 STEER WHEEL	1650	
												10 OTHER VEHICLES	2145	
												25 OTHER VEHICLES	1650	
STATIC SIDE LOADER	2490													
6.50 - 10	TT	14	-	STD	193	595	278	1774	5.00 F	5.50 F		10.00		
												25 LOAD WHEEL	2340	
												25 STEER WHEEL	1800	
												10 OTHER VEHICLES	2340	
												25 OTHER VEHICLES	1800	
STATIC SIDE LOADER	2720													
Ø 12"	27 X 10 - 12 (250/75 - 12)	TT	20	-	STD	255	690	-	-	8.00 G	-	10.00		
												25 LOAD WHEEL	4615	
												25 STEER WHEEL	3550	
												10 OTHER VEHICLES	4615	
												25 OTHER VEHICLES	3550	
STATIC SIDE LOADER	5360													
27 X 10 - 12 (250/75 - 12)	TT	16	-	STD	255	690	-	-	8.00 G	-		8.00		
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												10 OTHER VEHICLES	3900	
												25 OTHER VEHICLES	3000	
STATIC SIDE LOADER	4530													
27 X 10 - 12 (250/75 - 12)	TT	16	142 A8	IMP	255	690	-	-	8.00 G	-		8.00		
												40	2650	
27 X 10 - 12 (250/75 - 12)	TT	20	148 A8	IMP	255	690	-	-	8.00 G	-		10.00		
												40	3150	
7.00 - 12	TT	14	-	STD	205	675	-	-	5.00 S	-		9.00		
												25 LOAD WHEEL	2755	
												25 STEER WHEEL	2120	
												10 OTHER VEHICLES	2755	
												25 OTHER VEHICLES	2120	
STATIC SIDE LOADER	3200													
7.00 - 12	TT	16	-	STD	205	675	-	-	5.00 S	-		10.00		
												25 LOAD WHEEL	2910	
												25 STEER WHEEL	2240	
												10 OTHER VEHICLES	2910	
												25 OTHER VEHICLES	2240	
STATIC SIDE LOADER	3380													

STD: Standard - IMP: Implement

Technology



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance





FORKLIFT

POWER TRAX HD

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
10.00L - 15 (36 X 11 - 15)	TT	16	-	STD	285	918	-	-	7.50	BD	7.5		9.00	
													25 LOAD WHEEL	5525
													25 STEER WHEEL	4250
													10 OTHER VEHICLES	5525
													25 OTHER VEHICLES	4250
													STATIC SIDE LOADER	6420
10.00L - 15 (36 X 11 - 15)	TT	24	-	STD	285	918	-	-	7.50	BD	7.5		10.00	
													25 LOAD WHEEL	6240
													25 STEER WHEEL	4800
													10 OTHER VEHICLES	6240
													25 OTHER VEHICLES	4800
													STATIC SIDE LOADER	7250
250 - 15 (250/70 - 15)	TT	18	-	STD	240	745	-	-	7.50		7.0		9.50	
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
													10 OTHER VEHICLES	4745
													25 OTHER VEHICLES	3650
													STATIC SIDE LOADER	5510
250 - 15 (250/70 - 15)	TT	20	-	STD	240	745	-	-	7.50		7.0		10.00	
													25 LOAD WHEEL	5040
													25 STEER WHEEL	3875
													10 OTHER VEHICLES	5040
													25 OTHER VEHICLES	3875
													STATIC SIDE LOADER	5850
250 - 15 (250/70 - 15)	TT	16	-	STD	240	745	-	-	7.50		7.0		8.30	
													25 LOAD WHEEL	4355
													25 STEER WHEEL	3350
													10 OTHER VEHICLES	4355
													25 OTHER VEHICLES	3350
													STATIC SIDE LOADER	5060
28 X 12.5 - 15	TT	24	149A8	IMP	304	705	-	-	9.75	BD	-		10.00	
													40	3250
28 X 12.5 - 15	TT	24	-	STD	304	705	-	-	9.75	BD	-		10.00	
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
													10 OTHER VEHICLES	4745
													25 OTHER VEHICLES	3650
													STATIC SIDE LOADER	5510
300 - 15 (315/70 - 15)	TT	20	-	STD	300	845	-	-	8.00		-		9.00	
													25 LOAD WHEEL	6500
													25 STEER WHEEL	5000
													10 OTHER VEHICLES	6500
													25 OTHER VEHICLES	5000
													STATIC SIDE LOADER	7550

Technology



Deep Tread

Performance



Durability



High Puncture Resistance



Cut and Chip Resistance


STD: Standard - IMP: Implement





FORKLIFT

POWER TRAX HD

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	227	710	-	-	7.00	7 BD		10.00		
												25 LOAD WHEEL	3900	
												25 STEER WHEEL	3000	
												10 OTHER VEHICLES	3900	
												25 OTHER VEHICLES	3000	
STATIC SIDE LOADER	4530													
8.25 - 15	TT	14	-	STD	248	845	-	-	6.50	7.0		8.00		
												25 LOAD WHEEL	4225	
												25 STEER WHEEL	3250	
												10 OTHER VEHICLES	4225	
												25 OTHER VEHICLES	3250	
STATIC SIDE LOADER	4910													
8.25 - 15	TT	16	-	STD	248	845	-	-	6.50	7.0		9.30		
												25 LOAD WHEEL	4615	
												25 STEER WHEEL	3550	
												10 OTHER VEHICLES	4615	
												25 OTHER VEHICLES	3550	
STATIC SIDE LOADER	5360													
Ø 20"	10.00 - 20	TT	16	160A8	IMP	285	1080	-	-	7.5	8.0		9.00	
													40	4500
10.00 - 20	TT	16	-	STD	285	1080	-	-	7.5	8.0		9.00		
												25 LOAD WHEEL	6500	
												25 STEER WHEEL	5000	
												10 OTHER VEHICLES	6500	
												25 OTHER VEHICLES	5000	
STATIC SIDE LOADER	7550													
10.00 - 20	TT	18	-	STD	285	1080	-	-	7.5	8.0		10.00		
												25 LOAD WHEEL	6890	
												25 STEER WHEEL	5300	
												10 OTHER VEHICLES	6890	
												25 OTHER VEHICLES	5300	
STATIC SIDE LOADER	8005													
9.00 - 20	TT	16	-	STD	270	1050	-	-	7.0	7.5		10.00		
												25 LOAD WHEEL	6175	
												25 STEER WHEEL	4750	
												10 OTHER VEHICLES	6175	
												25 OTHER VEHICLES	4750	
STATIC SIDE LOADER	7150													

STD: Standard - IMP: Implement

Technology



Deep Tread

Performance



Durability



High Puncture Resistance





Cut and Chip Resistance

POWER TRAX HD SMOOTH



POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, POWER TRAX HD SMOOTH is your ideal partner.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0	10.00	25 LOAD WHEEL	9230
											25 STEER WHEEL	7100	
											10 OTHER VEHICLES	9230	
											25 OTHER VEHICLES	7100	
											STATIC SIDE LOADER	10720	
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0	10.00	25 LOAD WHEEL	9490
											25 STEER WHEEL	7300	
											10 OTHER VEHICLES	9490	
											25 OTHER VEHICLES	7300	
											STATIC SIDE LOADER	11025	

STD: Standard

Technology



Heavy Duty



Extra Deep Tread

Performance



Durability



Stability



Cut and Chip Resistance






FORKLIFT

 Bias

SNOW GRIP



SNOW GRIP is specifically engineered for forklifts operating in low-temperature environments. The unique tread design features multiple gripping edges for superior grip on fresh or compact snow, resulting in excellent cornering and braking performance on icy and snowy surfaces. The dual bead construction along with the strong casing and reinforced sidewall provides higher load capacity, excellent stability and handling in lift mode in addition to a long tire life.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
												
7.50 - 16	TT	12	131A2	STD	210	810	-	-	6.0	-	10	5.0 1950

STD: Standard

Performance



Handling & Comfort



High Load Capacity



Ice and Snow



Stability



Traction





FORKLIFT

Bias

SUPER TRAX HD



SUPER TRAX HD has been specifically engineered for forklifts in heavy-duty material handling operations, including port and mining applications. The extra deep tread is made of a unique wear-resistant tread compound ensuring a longer service life. SUPER TRAX HD features a strong casing and a reinforced sidewall resulting in both excellent stability and maneuvering in lift mode. The specially designed rim guard provides protection against flats and wheel damage in the rim flange area.

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
Ø 9"	6.00 - 9	TT	12	-	STD	168	548	256	1672	4.00 E	-	25 LOAD WHEEL	1885
												25 STEER WHEEL	1450
												10 OTHER VEHICLES	1885
												25 OTHER VEHICLES	1450
												STATIC SIDE LOADER	2190
Ø 10"	6.50 - 10	TT	12	-	STD	195	600	282	1838	5.00 F	5.50 F	km/h / bar	9.00
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
												10 OTHER VEHICLES	2145
												25 OTHER VEHICLES	1650
STATIC SIDE LOADER	2490												
Ø 12"	7.00 - 12	TT	14	-	STD	200	692	323	2088	5.00 S	-	km/h / bar	9.00
												25 LOAD WHEEL	2755
												25 STEER WHEEL	2120
												10 OTHER VEHICLES	2755
												25 OTHER VEHICLES	2120
STATIC SIDE LOADER	3200												
Ø 15"	8.15 - 15 (28 X 9 - 15)	TT	14	-	STD	220	715	332	2169	7.00	7 BD	km/h / bar	10.00
												25 LOAD WHEEL	3900
												25 STEER WHEEL	3000
												10 OTHER VEHICLES	3900
												25 OTHER VEHICLES	3000
	STATIC SIDE LOADER	4530											
	8.25 - 15	TT	16	-	STD	245	845	395	2434	6.50	7.0	km/h / bar	9.30
												25 LOAD WHEEL	4615
												25 STEER WHEEL	3550
												10 OTHER VEHICLES	4615
25 OTHER VEHICLES												3550	
STATIC SIDE LOADER	5360												

STD: Standard

Technology



Extra Deep Tread

Performance



Stability



Cut Resistance



Traction



Handling & Comfort



Durability



FORKLIFT

◆ Solid

MAGLIFT



MAGLIFT has been particularly designed for forklift in industrial and logistic operations. This solid tire features high load capacity and outstanding comfort. MAGLIFT shows excellent cut and chip resistance resulting in a long tire life. Its reinforced structure eliminates slippage risks whilst the special bead shape simplifies mounting operations on the rim.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
												25 LOAD WHEEL	25 STEER WHEEL
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	LIP	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	LIP NM	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD NM	119	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
												25 STEER WHEEL	800
16 X 6 - 8 (150/75 - 8)	-	-	-	-	STD	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	LIP	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	LIP NM	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
16 X 6 - 8 (150/75 - 8)	-	-	-	-	STD NM	139	421	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
												25 STEER WHEEL	1150
18 X 7 - 8 (180/70 - 8)	-	-	-	-	STD	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
18 X 7 - 8 (180/70 - 8)	-	-	-	-	LIP	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650
18 X 7 - 8 (180/70 - 8)	-	-	-	-	LIP NM	153	457	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
												25 STEER WHEEL	1650

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking





Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
										Icons				
18 X 7 - 8 (180/70 - 8)	-	-	-	-	STD NM	153	457	-	-	4.33 R - 8	-		km/h / bar	-
													25 LOAD WHEEL	2145
													25 STEER WHEEL	1650
4.00 - 8	-	-	-	-	STD	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	LIP	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	LIP NM	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
4.00 - 8	-	-	-	-	STD NM	109	406	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	950
													25 STEER WHEEL	730
5.00 - 8	-	-	-	-	STD	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	LIP	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	LIP NM	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
5.00 - 8	-	-	-	-	STD NM	120	462	-	-	3.00 D - 8	-		km/h / bar	-
													25 LOAD WHEEL	1415
													25 STEER WHEEL	1090
Ø 9"	140/55 - 9	-	-	-	STD	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	LIP	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	LIP NM	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900
140/55 - 9	-	-	-	-	STD NM	132	377	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1170
													25 STEER WHEEL	900

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance





Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
21 X 8 - 9 (200/75 - 9)	-	-	-	-	STD	189	525	-	-	6.00 E - 9	-		km/h / bar	-	
													25 LOAD WHEEL	2755	
													25 STEER WHEEL	2120	
21 X 8 - 9 (200/75 - 9)	-	-	-	LIP	189	525	-	-	6.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	2755	
													25 STEER WHEEL	2120	
21 X 8 - 9 (200/75 - 9)	-	-	-	LIP NM	189	525	-	-	6.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	2755	
													25 STEER WHEEL	2120	
21 X 8 - 9 (200/75 - 9)	-	-	-	STD NM	189	525	-	-	6.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	2755	
													25 STEER WHEEL	2120	
6.00 - 9	-	-	-	STD	141	529	-	-	4.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	1885	
													25 STEER WHEEL	1450	
6.00 - 9	-	-	-	LIP	141	529	-	-	4.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	1885	
													25 STEER WHEEL	1450	
6.00 - 9	-	-	-	LIP NM	141	529	-	-	4.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	1885	
													25 STEER WHEEL	1450	
6.00 - 9	-	-	-	STD NM	141	529	-	-	4.00 E - 9	-			km/h / bar	-	
													25 LOAD WHEEL	1885	
													25 STEER WHEEL	1450	
Ø 10"	180/60-10	-	-	-	STD	153	460	-	-	5.00F-10	-			km/h / bar	-
														25 LOAD WHEEL	2410
														25 STEER WHEEL	1850
180/60-10	-	-	-	LIP	153	460	-	-	5.00F-10	-			km/h / bar	-	
													25 LOAD WHEEL	2410	
													25 STEER WHEEL	1850	
200/50 - 10	-	-	-	STD	193	458	-	-	6.50 F - 10	-			km/h / bar	-	
													25 LOAD WHEEL	2470	
													25 STEER WHEEL	1900	
200/50 - 10	-	-	-	LIP	193	458	-	-	6.50 F - 10	-			km/h / bar	-	
													25 LOAD WHEEL	2470	
													25 STEER WHEEL	1900	
200/50 - 10	-	-	-	LIP NM	193	458	-	-	6.50 F - 10	-			km/h / bar	-	
													25 LOAD WHEEL	2470	
													25 STEER WHEEL	1900	

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance





Ø 10"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
200/50 - 10	-	-	-	-	STD NM	193	458	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900
23 X 9 - 10 (225/75 - 10)	-	-	-	-	STD	213	585	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	LIP	213	585	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	LIP NM	213	585	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
23 X 9 - 10 (225/75 - 10)	-	-	-	-	STD NM	213	585	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
6.50 - 10	-	-	-	-	STD	154	575	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	LIP	154	575	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	LIP NM	154	575	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
6.50 - 10	-	-	-	-	STD NM	154	575	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 12"	23 X 10 - 12 (250/60 - 12)	-	-	-	STD	236	584	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	LIP	236	584	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	LIP NM	236	584	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900
23 X 10 - 12 (250/60 - 12)	-	-	-	-	STD NM	236	584	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3770
													25 STEER WHEEL	2900

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort





FORKLIFT

MAGLIFT

Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
27 X 10 - 12 (250/75 - 12)	-	-	-	-	STD	240	677	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
27 X 10 - 12 (250/75 - 12)	-	-	-	-	LIP	240	677	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
27x10-12 (250/75 - 12)	-	-	-	-	LIP NM	240	677	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
27x10-12 (250/75 - 12)	-	-	-	-	STD NM	240	677	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
315/45-12	-	-	-	-	STD	282	578	-	-	10.00G-12	-		km/h / bar	-
													25 LOAD WHEEL	4485
													25 STEER WHEEL	3450
315/45-12	-	-	-	-	LIP	282	578	-	-	10.00G-12	-		km/h / bar	-
													25 LOAD WHEEL	4485
													25 STEER WHEEL	3450
7.00 - 12	-	-	-	-	STD	168	658	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
7.00 - 12	-	-	-	-	LIP	168	658	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
7.00 - 12	-	-	-	-	LIP NM	168	658	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
7.00 - 12	-	-	-	-	STD NM	168	658	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
Ø 15"	250 - 15 (250/70 - 15)	-	-	-	STD	216	718	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
250 - 15 (250/70 - 15)	-	-	-	-	LIP	216	718	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
250 - 15 (250/70 - 15)	-	-	-	-	LIP NM	216	718	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650

Performance



STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking





Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
250 - 15 (250/70 - 15)	-	-	-	-	STD NM	216	718	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4745
													25 STEER WHEEL	3650
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	STD	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	LIP	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	LIP NM	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
28 X 12.5 - 15 (355/45 - 15)	-	-	-	-	STD NM	295	687	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5690
													25 STEER WHEEL	4375
32 X 12.5 - 15 (355/65 - 15)	-	-	-	-	LIP	295	825	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	7800
													25 STEER WHEEL	6000
32 X 12.5 - 15 (355/65 - 15)	-	-	-	-	STD	295	825	-	-	9.75 - 15	-		km/h / bar	-
													25 LOAD WHEEL	7800
													25 STEER WHEEL	6000
300 - 15 (315/70 - 15)	-	-	-	-	STD	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	LIP	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	LIP NM	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
300 - 15 (315/70 - 15)	-	-	-	-	STD NM	255	820	-	-	8.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	5850
													25 STEER WHEEL	4500
7.00 - 15	-	-	-	-	STD	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
7.00 - 15	-	-	-	-	LIP	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
7.00 - 15	-	-	-	-	LIP NM	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725
7.00 - 15	-	-	-	-	STD NM	180	730	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3545
													25 STEER WHEEL	2725

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking







Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													25 LOAD WHEEL	25 STEER WHEEL
7.50 - 15	-	-	-	-	STD	193	756	-	-	5.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	-	STD	193	756	-	-	6.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP	193	756	-	-	5.5 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP	193	756	-	-	6.0 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP NM	193	756	-	-	5.5 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	LIP NM	193	756	-	-	6.0 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	STD NM	193	756	-	-	5.5 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
7.50 - 15	-	-	-	STD NM	193	756	-	-	6.0 - 15	-			km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
8.15-15/28x9-15 (225/75 - 15)	-	-	-	-	STD	218	691	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
8.15-15/28x9-15 (225/75 - 15)	-	-	-	-	LIP	218	691	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
8.15-15/28x9-15 (225/75 - 15)	-	-	-	-	LIP NM	218	691	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
8.15-15/28x9-15 (225/75 - 15)	-	-	-	-	STD NM	218	691	-	-	7.0 - 15	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
8.25 - 15	-	-	-	-	LIP	207	818	-	-	6.5 - 15	-		km/h / bar	-
													25 LOAD WHEEL	4750
													25 STEER WHEEL	3650

Performance



STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
8.25 - 15	-	-	-	-	STD	207	818	-	-	6.5 - 15	-		25 LOAD WHEEL	4750
													25 STEER WHEEL	3650
													km/h / bar	-
8.25 - 15	-	-	-	-	LIP NM	207	818	-	-	6.5 - 15	-		25 LOAD WHEEL	4750
													25 STEER WHEEL	3650
													km/h / bar	-
8.25 - 15	-	-	-	-	STD NM	207	818	-	-	6.5 - 15	-		25 LOAD WHEEL	4750
													25 STEER WHEEL	3650
													km/h / bar	-

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Performance



Cut and Chip



High Load Capacity



Durability



Comfort





FORKLIFT

◆ Solid

MAGLIFT ECO



MAGLIFT ECO has been particularly designed for forklifts. The tire features a wide lug pattern providing maximum stability and optimized load distribution. Its reinforced structure eliminates slippage risks whilst the specifically designed rim guard ensures protection against wheel damage. MAGLIFT ECO shows excellent traction as well as low rolling resistance and low heat built up for improved efficiency.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	-
												25 LOAD WHEEL	25 STEER WHEEL
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	STD	109	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
15 X 4.5 - 8 (125/75 - 8)	-	-	-	-	LIP	109	378	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1040
16 X 6 - 8 (150/75 - 8)	-	-	-	-	STD	140	407	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
16 X 6 - 8 (150/75 - 8)	-	-	-	-	LIP	140	407	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	1495
18 X 7 - 8 (180/70 - 8)	-	-	-	-	STD	133	451	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
18 X 7 - 8 (180/70 - 8)	-	-	-	-	LIP	133	451	-	-	4.33 R - 8	-	km/h / bar	-
												25 LOAD WHEEL	2145
4.00 - 8	-	-	-	-	STD	100	404	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	950
4.00 - 8	-	-	-	-	LIP	100	404	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	950
5.00 - 8	-	-	-	-	STD	111	455	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1415
5.00 - 8	-	-	-	-	LIP	111	455	-	-	3.00 D - 8	-	km/h / bar	-
												25 LOAD WHEEL	1415

STD: Standard - LIP: LIP Version

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability





FORKLIFT

MAGLIFT ECO

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 9"	21 X 8 - 9 (200/75 - 9)	-	-	-	STD	175	520	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
Ø 9"	21 X 8 - 9 (200/75 - 9)	-	-	-	LIP	175	520	-	-	6.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	2755
													25 STEER WHEEL	2120
Ø 9"	6.00 - 9	-	-	-	STD	130	522	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	LIP	130	522	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 10"	200 / 50 - 10	-	-	-	STD	180	452	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900
Ø 10"	200 / 50 - 10	-	-	-	LIP	180	452	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2470
													25 STEER WHEEL	1900
Ø 10"	23 X 9 - 10 (225/75 - 10)	-	-	-	STD	184	578	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
Ø 10"	23 X 9 - 10 (225/75 - 10)	-	-	-	LIP	184	578	-	-	6.50 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	3445
													25 STEER WHEEL	2650
Ø 10"	6.50 - 10	-	-	-	STD	153	571	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 10"	6.50 - 10	-	-	-	LIP	153	571	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 12"	27 X 10 - 12 (250/75 - 12)	-	-	-	STD	225	670	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
Ø 12"	27 X 10 - 12 (250/75 - 12)	-	-	-	LIP	225	670	-	-	8.00 G - 12	-		km/h / bar	-
													25 LOAD WHEEL	3900
													25 STEER WHEEL	3000
Ø 12"	7.00 - 12	-	-	-	STD	164	645	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability

STD: Standard - LIP: LIP Version





FORKLIFT

MAGLIFT ECO

Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
Ø 12"	7.00 - 12	-	-	-	LIP	164	645	-	-	5.00 S -12			km/h / bar	-	
													25 LOAD WHEEL	2920	
													25 STEER WHEEL	2240	
Ø 15"	250 - 15 (250/70 - 15)	-	-	-	STD	209	714	-	-	7.0 - 15	-		km/h / bar	-	
													25 LOAD WHEEL	4745	
													25 STEER WHEEL	3650	
	250 - 15 (250/70 - 15)	-	-	-	LIP	209	714	-	-	7.0 - 15	-			km/h / bar	-
														25 LOAD WHEEL	4745
														25 STEER WHEEL	3650
	300-15 (315/70 - 15)	-	-	-	STD	242	820	-	-	8.0-15	-			km/h / bar	-
														25 LOAD WHEEL	5850
														25 STEER WHEEL	4500
	300-15 (315/70 - 15)	-	-	-	LIP	242	820	-	-	8.0-15	-			km/h / bar	-
														25 LOAD WHEEL	5850
														25 STEER WHEEL	4500
	8.15-15/28x9-15 (225/75 - 15)	-	-	-	STD	204	691	-	-	7.0 - 15	-			km/h / bar	-
														25 LOAD WHEEL	3445
														25 STEER WHEEL	2650
	8.15-15/28x9-15 (225/75 - 15)	-	-	-	LIP	204	691	-	-	7.0 - 15	-			km/h / bar	-
														25 LOAD WHEEL	3445
														25 STEER WHEEL	2650
	8.25 - 15	-	-	-	STD	210	808	-	-	6.5 - 15	-			km/h / bar	-
														25 LOAD WHEEL	4750
														25 STEER WHEEL	3650
	8.25 - 15	-	-	-	LIP	210	808	-	-	6.5 - 15	-			km/h / bar	-
														25 LOAD WHEEL	4750
														25 STEER WHEEL	3650

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



Stability

STD: Standard - LIP: LIP Version





FORKLIFT

◆ Solid

MAGLIFT PREMIUM



MAGLIFT PREMIUM is a solid tire specially designed for heavy forklift operations in port, mining or scrap yard applications. The extra deep tread (25% more compared to the standard version) with its aggressive and robust pattern provides outstanding front and lateral traction in addition to excellent steering control. The unique tread compound ensures high cut and chip resistance resulting in an extended tire life-cycle. Additional features are low rolling resistance and a smooth run.

Ø 9"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 9"	6.00 - 9	-	-	-	STD	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	LIP	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	LIP NM	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 9"	6.00 - 9	-	-	-	STD NM	137	536	-	-	4.00 E - 9	-		km/h / bar	-
													25 LOAD WHEEL	1885
													25 STEER WHEEL	1450
Ø 10"	6.50 - 10	-	-	-	STD	150	582	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 10"	6.50 - 10	-	-	-	LIP	150	582	-	-	5.00 F - 10	-		km/h / bar	-
													25 LOAD WHEEL	2340
													25 STEER WHEEL	1800
Ø 12"	7.00 - 12	-	-	-	STD	163	664	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240
Ø 12"	7.00 - 12	-	-	-	LIP	163	664	-	-	5.00 S - 12	-		km/h / bar	-
													25 LOAD WHEEL	2920
													25 STEER WHEEL	2240

STD: Standard - LIP: LIP Version - STD NM: Standard Non Marking - LIP NM: LIP Non Marking

Technology



Extra Deep Tread

Performance



Cut and Chip Resistance



High Load Capacity



Durability



Comfort



FORKLIFT

◆ Solid

MAGLIFT ECO RIB



MAGLIFT ECO RIB is a solid tire specially designed for GSE trailers (ground support equipment). Its reinforced structure eliminates slippage risks whilst the specifically designed rim guard ensures protection against wheel damage. MAGLIFT ECO RIB shows excellent steering control, high stability, low vibration and self-ment for trailers. Additional features are low rolling resistance and low heat built up for improved efficiency.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
4.00 - 8	-	-	-	-	STD	104	406	-	-	3.00 D - 8	-	km/h / bar	-
												5 OTHER VEHICLES	950
												10 OTHER VEHICLES	860
												25 OTHER VEHICLES	730
4.00 - 8	-	-	-	-	STD	124	408	-	-	3.75 I - 8	-	km/h / bar	-
												5 OTHER VEHICLES	1010
												10 OTHER VEHICLES	915
												25 OTHER VEHICLES	775

STD: Standard - LIP: LIP Version

Performance



Steering Control



Low Rolling Resistance



Stability



BACKHOE LOADER



MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)																																																										
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4																																																	
												50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static																																									
280/80 R 18 IND	TL	-	132 A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	W 9; 9; 9 SDC	W 8; W 10	50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static	50	40	30	25	10 Cyc.	Static																																								
											960	1140	1300	1480	1660	1780	2000	-	-	960	1140	1300	1480	1660	1780	2000	-	-	1030	1220	1395	1585	1780	1905	2140	-	-	1070	1270	1445	1645	1845	1980	2220	-	-	1170	1440	1695	1950	2220	2415	2730	2880	3000	1795	2210	2600	2990	3405	3705	4190	4420	4600						
											1310	1555	1775	2020	2265	2430	2725	-	-	1310	1555	1775	2020	2265	2430	2725	-	-	1405	1665	1900	2165	2425	2600	2920	-	-	1455	1725	1970	2240	2515	2695	3025	-	-	1600	1965	2315	2660	3030	3295	3725	3930	4090	2450	3010	3545	4080	4640	5050	5710	6020	6270						
											1345	1600	1820	2075	2325	2495	2800	-	-	1345	1600	1820	2075	2325	2495	2800	-	-	1440	1710	1950	2220	2490	2670	3000	-	-	1495	1775	2025	2305	2585	2770	3110	-	-	1640	2020	2375	2730	3110	3385	3825	4035	4200	2515	3095	3640	4190	4770	5185	5865	6185	6440						
											1500	1770	2040	2305	2575	2860	3005	3150	-	-	1500	1770	2040	2305	2575	2860	3005	3150	-	-	1610	1900	2195	2490	2780	3075	3220	3370	-	-	1670	1975	2280	2585	2890	3195	3350	3500	-	-	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250
											1560	1855	2115	2405	2700	2895	3250	-	-	1560	1855	2115	2405	2700	2895	3250	-	-	1675	1985	2265	2580	2890	3100	3480	-	-	1735	2060	2350	2675	3000	3215	3610	-	-	1905	2340	2755	3170	3610	3925	4440	4680	4875	2920	3590	4225	4860	5535	6020	6805	7180	7475						

Technology



Performance



STD: Standard

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.														
										km/h / bar															
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	533	3527	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4						
											50	1705	2025	2310	2630	2950	3160	3550	-	-					
											40	1705	2025	2310	2630	2950	3160	3550	-	-					
											30	1825	2170	2470	2815	3155	3385	3800	-	-					
											25	1895	2250	2565	2920	3275	3515	3945	-	-					
											10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
											Static	3185	3920	4615	5310	6045	6575	7435	7840	8165					
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	553	3778	DW 13	DW 12; DW 13 L; DW 14 L	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4	
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	586	3958	DW 14 L	DW 13; DW 13 L; DW 15 L	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4						
											50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
460/70 R 24 IND (19.5L R 24)	TL	-	159 A8/B	STD	465	1250	568	3766	DW 15 L	DW 14 L; DW 16 L	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4						
											50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
											Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					
500/70 R 24 IND (19.5L R 24)	TL	-	164 A8/B	STD	503	1310	595	3940	DW 16 L	DW 15 L; DW 18 L	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4						
											50	2400	2850	3250	3700	4150	4450	5000	-	-					
											40	2400	2850	3250	3700	4150	4450	5000	-	-					
											30	2570	3050	3480	3960	4445	4765	5350	-	-					
											25	2665	3165	3610	4110	4610	4940	5550	-	-					
											10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
											Static	4485	5520	6500	7475	8510	9260	10465	11040	11500					
540/70 R 24 IND	TL	-	168 A8/B	STD	530	1366	611	4133	DW 16 L	DW 18 L	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4						
											50	2690	3195	3640	4145	4650	4985	5600	-	-					
											40	2690	3195	3640	4145	4650	4985	5600	-	-					
											30	2880	3420	3900	4440	4980	5340	5995	-	-					
											25	2990	3550	4045	4605	5165	5540	6220	-	-					
											10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400					
											Static	5025	6185	7280	8375	9535	10370	11725	12365	12880					

STD: Standard

Technology



Steel Belted



Special Compound

Performance



Stability



Traction





High Puncture Resistance



Cut and Chip Resistance



MULTIMAX MP 522

Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
																						
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750	
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350	

Ø 28"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW 14 L	DW 13 L; DW 15 L	Load capacity (kg/tire)										
												km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
												440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13 L; DW 15 L
40	2300	2725	2940	3150	3360	3575	3790	4000	-	-												
30	2480	2930	3155	3380	3605	3830	4055	4280	-	-												
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-												
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000												
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												

STD: Standard

Technology



Steel Belted



Special Compound

Performance



Stability



Traction



High Puncture Resistance



Cut and Chip Resistance



RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)								
										Rec.	Alt.									
										km/h / bar		1.2	1.6	2.0	2.2	2.4	2.6			
11L R 16	TL	-	122 A8/B	STD	290	850	-	-	W 8	W 10 L	km/h / bar									
											10	1265	1530	1790	1920	2055	2200			
											30	940	1165	1385	1500	1610	-			
												km/h / bar								
												10	880	1085	1295	1395	1500	-		
												km/h / bar								
												10	1265	1530	1790	1920	2055	2200		
												30	940	1165	1385	1500	1610	-		
												40	880	1085	1295	1395	1500	-		
												km/h / bar								
												50	1535	1890	2245	2560	2915	3265	3505	4000
												40	1705	2100	2495	2845	3240	3630	3895	4375
												30	1775	2185	2595	2960	3370	3775	4050	4550
												25	1805	2225	2645	3015	3435	3850	4130	4640
												10 Cyc	2560	3150	3745	4270	4860	5445	5845	6565
												Static	3920	4830	5740	6545	7450	8350	8960	10065
												km/h / bar								
												50	1765	2175	2550	2965	3340	3750		
												40	1940	2395	2805	3260	3670	4125		
												30	2075	2560	3000	3490	3930	4415		
												25	2155	2655	3115	3620	4075	4580		
												10 Cyc	2910	3590	4210	4890	5510	6190		
												Static	4075	5025	5890	6845	7710	8665		

STD: Standard

Technology



Special Compound

Performance



Stability



Traction



High Load Capacity



Cut and Chip Resistance



BK 826



BK 826 has been specially designed for trailers in haulage applications. It is a bias tire featuring high load capacity thanks to its reinforced carcass. BK 826 is also available as "industrial" version that shows particular cut and chip resistance and is also suitable for backhoe loaders.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
8.25 - 16	TT	14	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	6.90	
											100 LS	1745	
											100 LD	1650	
8.25 - 16	TT	16	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											100 LS	1850	
											100 LD	1750	
8.25 - 16	TT	18	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	8	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	4.25	
											100 LS	1350	
											100 LD	1275	
8.25 - 16	TT	18	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	16	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	8.40	
											40 LS	2130	
											40 LD	2015	
8.25 - 16	TT	16	134A8	TRTR	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											40	2120	
9.00 - 16	TT	12	-	STD	265	925	-	-	6.50 H	6.00 G	km/h / bar	5.15	
											30	1900	

Technology




Performance



STD: Standard - IND: Industrial - TR TR: Tractor Trailer



Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	6.20
													
9.00 - 16	TT	14	-	STD	265	925	-	-	6.50 H	6.00 G	30	2120	
9.00 - 16	TT	16	-	STD	265	925	-	-	6.50 H	6.00 G	30	2300	
9.00 - 16	TT	18	-	STD	265	925	-	-	6.50 H	6.00 G	30	2360	
9.00 - 16	TT	16	-	IND	265	925	-	-	6.50 H	6.00 G	30	2300	
9.00 - 16	TT	12	-	SPL	265	925	-	-	6.50 H	6.00 G	30	1900	
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G	30	2360	
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G	30	2360	

STD: Standard - IND: Industrial - TR TR: Tractor Trailer - SPL: Special

Technology



Reinforced
Carcass

Performance



Cut and Chip
Resistance



High Load
Capacity

TR 461 (R-4)



TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
Ø 18"	12.5/80 - 18	TL	12	-	STD	305	987	435	2902	W 9	11	km/h / bar	3.70
												10 FR	3710
												25 FR	3155
												30 FR	2970
												40 FR	2650
												10 DW	2590
												25 DW	2200
												30 DW	2070
40 DW	1850												
Ø 24"	16.9 - 24	TL	14	151 A8	STD	440	1280	566	3763	DW 15 L	DW 14 L	km/h / bar	2.90
												40	3450
	19.5L - 24	TL	12	151 A8	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.30
												40	3450
	19.5L - 24	TL	14	154 A8	STD	490	1310	578	3851	DW 16 L	-	km/h / bar	2.60
												40	3750
	21L - 24	TL	14	157 A8	STD	540	1385	607	4072	DW 18 L	-	km/h / bar	2.50
												40	4125
Ø 28"	16.9 - 28	TL	14	154 A8	STD	440	1390	620	4087	DW 15 L	DW 14 L	km/h / bar	2.90
												40	3750
Ø 34"	620/60 B 34	TL	-	175 A8	HD	615	1629	750	4930	DW 20 B	-	km/h / bar	4.00
												40	6900

Performance




STD: Standard

MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
													
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50	
											80	2030	
											50	2180	
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00	
											80	1930	
											50	2000	
Ø 20	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.00
												80	1850
												50	2065
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	km/h / bar	3.50	
											80	2060	
											50	2300	
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	km/h / bar	3.00	
											65	2430	
											50	2500	

Performance



Durability




Traction



Self cleaning

STD: Standard

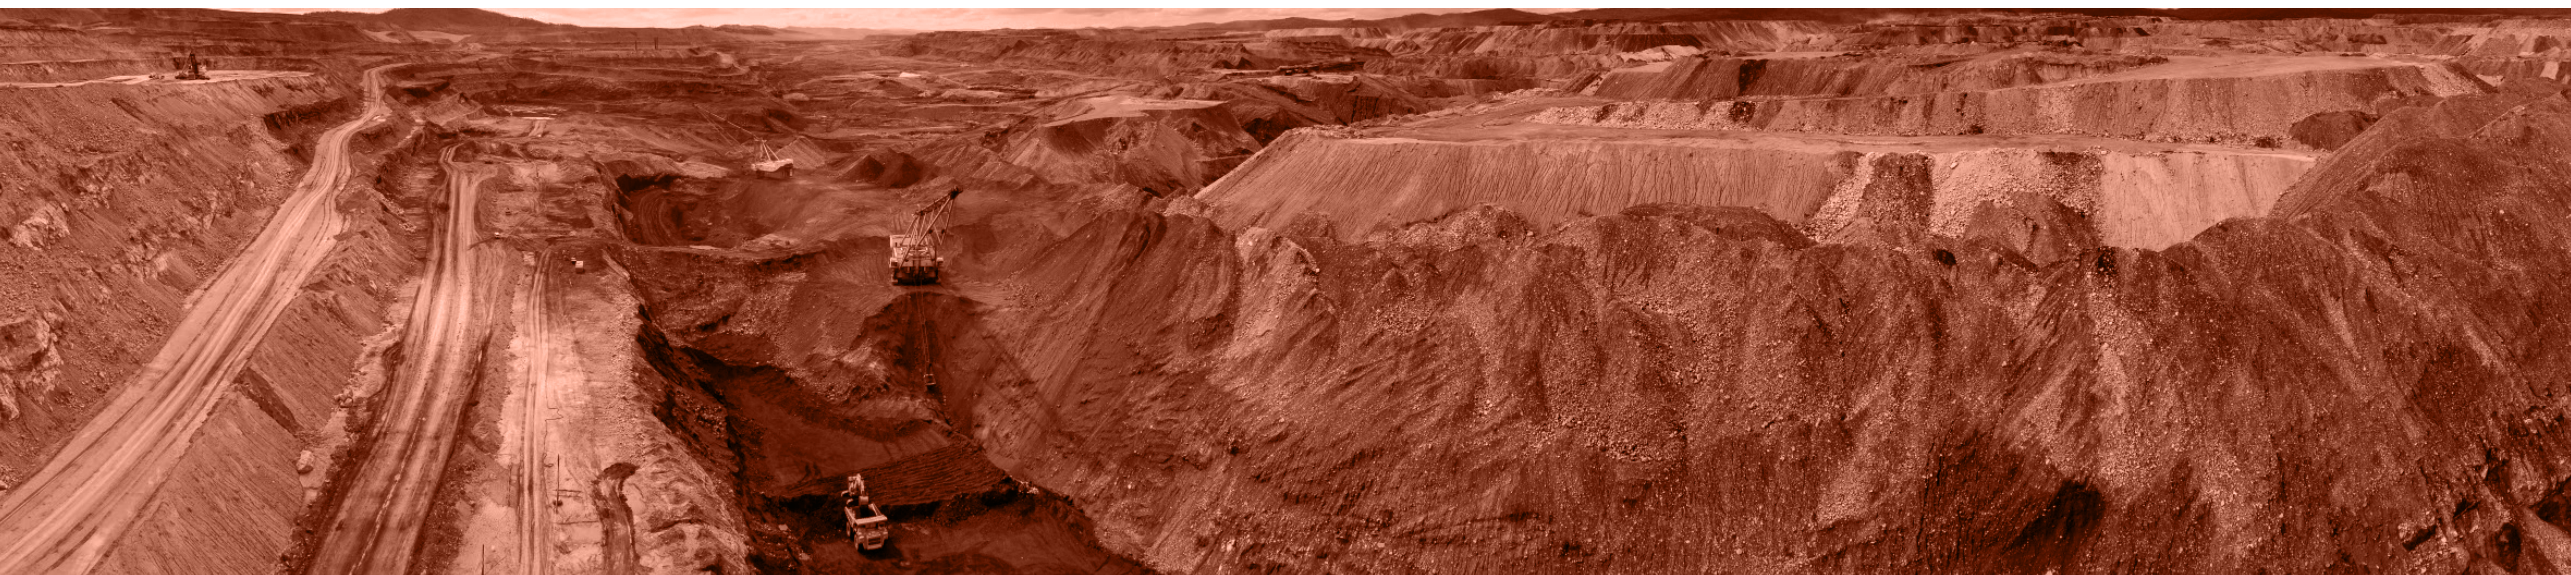

AT 603



AT 603 is a bias agro-industrial tire for implement machinery and backhoe loaders. AT 603 has been engineered to ensure great durability and traction on drive wheels providing best performance on every surface as well as excellent self-cleaning properties. The AT 603 "special" version has a reinforced casing, while the "HD" version offers improved cut and chip resistance.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	3.70
10.5/80 - 18	TL	10	119A8	131A8	STD	274	907	405	2657	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	HD	274	907	405	2657	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	SPL	274	907	405	2657	W 9	W 8,9	km/h / bar	3.70	
												10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
12.5/80 - 18	TL	12	129A8	142A8	STD	308	987	448	3027	W 9	11	km/h / bar	3.70	
												10 FR	3710	
												25 FR	3155	
												30 FR	2970	
												40 FR	2650	
												10 DW	2590	
												25 DW	2200	
												30 DW	2070	
40 DW	1850													

Technology



Performance



STD: Standard - HD: Heavy duty - SPL:Special



Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.				
														km/h / bar		
12.5/80 - 18	TL	16	135 A8	148 A8	STD	308	987	448	3027	W 9	11	4.90				
												10 FR	4410			
												25 FR	3750			
												30 FR	3530			
												40 FR	3150			
												10 DW	3050			
												25 DW	2595			
												30 DW	2440			
40 DW	2180															
12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	987	448	3027	W 9	11	3.70				
												10 FR	3710			
												25 FR	3155			
												30 FR	2970			
												40 FR	2650			
												10 DW	2590			
												25 DW	2200			
												30 DW	2070			
40 DW	1850															
12.5/80 - 18	TL	18	138 A8	150 A8	STD	308	987	448	3027	W 9	11	5.50				
												10 FR	4690			
												25 FR	3985			
												30 FR	3750			
												40 FR	3350			
												10 DW	3305			
												25 DW	2810			
												30 DW	2645			
40 DW	2360															
Ø 25"	15.5 - 25	TL	12	-	-	STD	410	1265	577	3861	12.00/1.3	12.00/1.3 (DC)	2.50	4.00	2.50	
													50	3250	-	-
													10	-	5600	-
													40	-	-	2650

STD: Standard

Technology



Heavy Duty



Strong Casing

Performance



Durability



Traction



Self cleaning



Cut and Chip Resistance

AT 621



AT 621 is suitable for backhoe loaders and compact loaders in all digging and loading operations in agriculture. The AT 621 tire features an extra deep tread which ensures great cut and chip resistance and higher durability. In addition, this BKT tire ensures great durability and self cleaning properties. AT 621 is available in several versions to meet the most differing user requirements.

Ø 15"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	3.25
	33 X 12.5 - 15	TT	8	-	-	STD	318	851	385	2493	10.00 F SDC	-	10	2130
Ø 16"	12.5/70 - 16	TL	14	-	-	STD	315	855	385	2584	10 LB	-	km/h / bar	4.4
													10	2240
	12.5/70 - 16	TT	14	-	-	STD	315	855	385	2584	10 LB	-	km/h / bar	4.4
													10	2240
	12.5/70 - 16	TL	8	-	-	STD	315	855	385	2584	10 LB	-	km/h / bar	2.60
10													1645	
9.00 - 16	TT	16	137A6	-	IND	260	925	-	-	6.50 H	6.00 G	km/h / bar	7.25	
													30	2300
Ø 18"	12.5/80 - 18	TT	12	129A8	142A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	3.70
													10 FR	3710
													25 FR	3155
													30 FR	2970
													40 FR	2650
													10 DW	2590
													25 DW	2200
	30 DW	2070												
	40 DW	1850												
	12.5/80 - 18	TL	16	135A8	148A8	STD	308	987	434	2916	W 9	11.0	km/h / bar	4.90
													10 FR	4410
													25 FR	3750
													30 FR	3530
													40 FR	3150
10 DW													3050	
25 DW													2595	
30 DW	2440													
40 DW	2180													

Performance



Durability



Traction



Self cleaning



Cut and Chip Resistance



Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.		km/h / bar	
12.5/80 - 18	TL	12	129 A8	142 A8	STD	308	987	434	2916	W 9	11		km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
12.5/80 - 18	TT	16	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0		km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	16	135 A8	148 A8	IND HD	308	987	434	2916	W 9	11.0		km/h / bar	4.90	
													10 FR	4410	
													25 FR	3750	
													30 FR	3530	
													40 FR	3150	
													10 DW	3050	
													25 DW	2595	
													30 DW	2440	
40 DW	2180														
12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	987	434	2916	W 9	11.0		km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													30 DW	2070	
40 DW	1850														
15.5/60 - 18	TL	10	139 A2	STD	400	950	428	2871	W 13	-		km/h / bar	2.60		
												10	2430		
15.5/60 - 18	TL	12	141 A2	STD	400	950	428	2871	W 13	-		km/h / bar	3.00		
												10	2575		

Performance



STD: Standard - SPL: Special - IND HD: Industrial Heavy Duty




Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	15.5/70 - 18 (400/70 - 18)	TL	10	-	STD	400	1030	474	3111	W 13	-		10	2700
													2.60	
													10	2700
Ø 19.5"	385/65 D 19.5	TL	16	165 A2	STD	390	1020	478	3136	11.75	12.25		km/h / bar	6.90
													10	5150
													0 (STATIONARY)	6700
Ø 20"	12.5 - 20	TT	12	-	STD	325	1040	-	-	11.0	-		km/h / bar	3.50
													40 FR	3350
													40 DW	2300
	17.5/65 - 20	TL	10	-	STD	450	1090	490	3294	W 14 L	-		km/h / bar	2.40
													10	3195
	400/70 - 20	TL	16	152 B/168 A2	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14		km/h / bar	4.00
													50	3550
													10	5600
	400/70 - 20	TL	-	149 A8	STD	450	1090	494	3271	13	12 SDC; 13 SDC; 14		km/h / bar	4.00
													40	3250
42 X 17 - 20	TT	10	-	STD	432	1073	480	3198	14.00 TG SDC	-		km/h / bar	3.00	
												10	3690	
Ø 24"	16.9 - 24	TL	12	149 A8	IND	450	1302	590	3906	DW 15 L	DW 14 L		km/h / bar	2.60
													40	3250
	17.5L - 24	TL	8	139 A8	STD	450	1255	558	3752	DW 15 L	DW 14 L		km/h / bar	1.70
													40	2430
	19.5L - 24	TL	12	151 A8	STD	482	1305	587	3936	DW 16 L	-		km/h / bar	2.30
													40	3450

Performance



STD: Standard - IND: Industrial



Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
															
18.4 - 26	TL	12	156A8	IND	480	1425	636	4133	DW 16 L	DW 15 L		40	2.50	4000	
Ø 28"	16.9 - 28	TT	12	152A8	IND	450	1410	639	4199	DW 15 L	DW 14 L		40	2.60	3550
16.9 - 28	TL	12	152A8	IND	450	1410	639	4199	DW 15 L	DW 14 L		40	2.60	3550	
Ø 30"	16.9 - 30	TL	12	153A8	IND	450	1460	670	4398	DW 15 L	DW 14 L		40	2.60	3650

Performance



STD: Standard - IND: Industrial



AT 625




AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
14.9 - 24	TL	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
14.9 - 24	TT	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L	km/h / bar	2.90	
											40	2900	
Ø 28"	16.9 - 28	TT	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60
												40	3550
16.9 - 28	TL	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	
16.9 - 28	TT	12	152 A8	SPL	450	1415	645	4254	DW 15 L	DW 14 L	km/h / bar	2.60	
											40	3550	

Performance



STD: Standard - IND: Industrial - SPL: Special

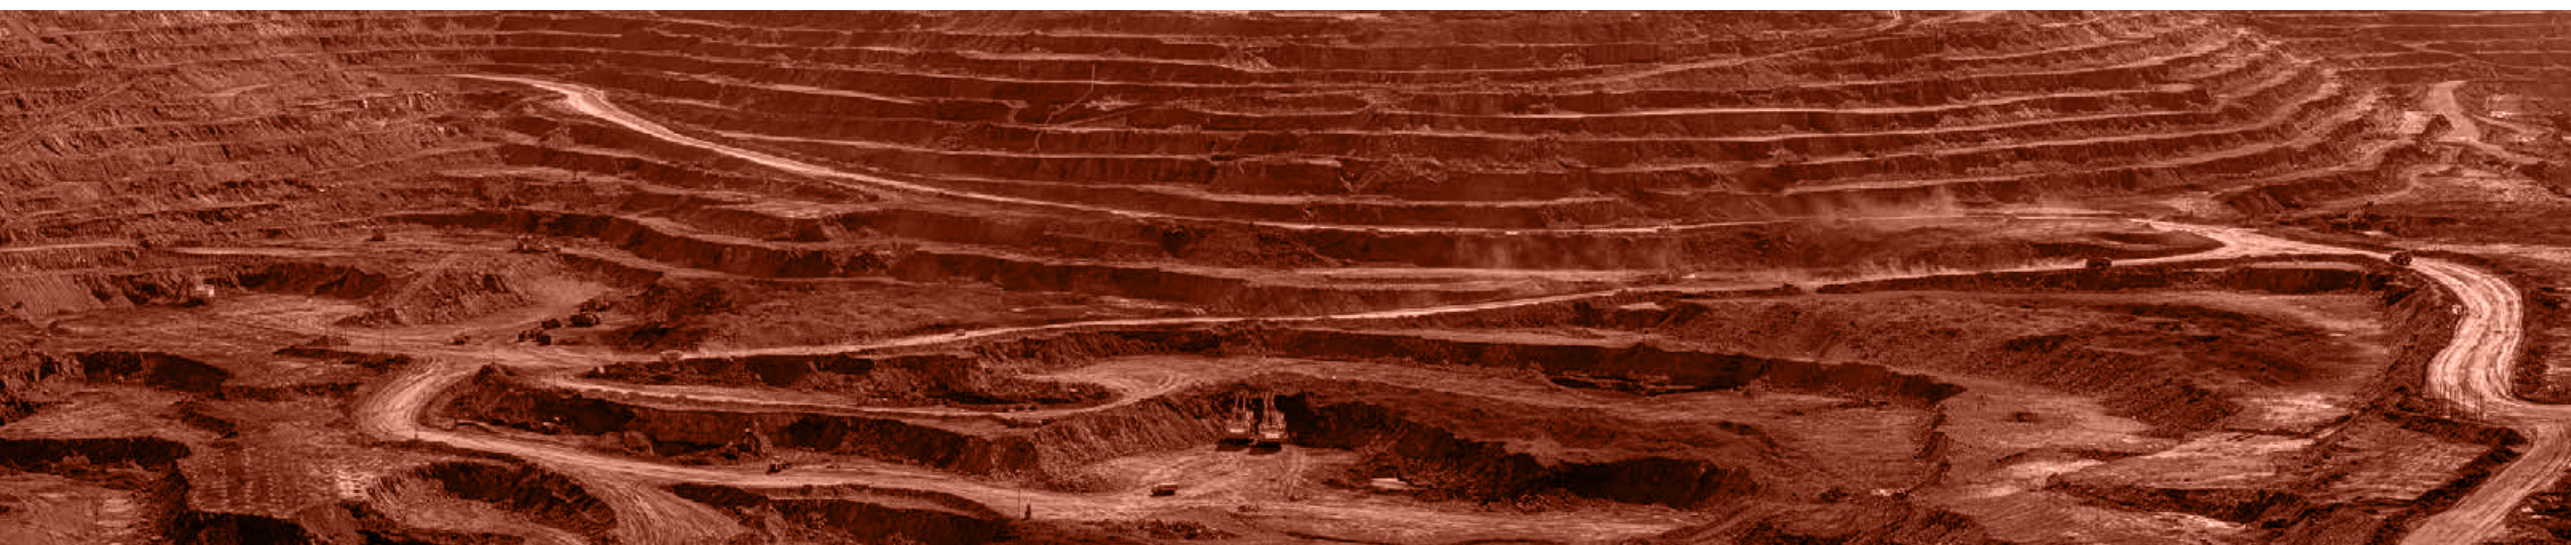





BACKHOE
LOADER

 Bias

BK 6060



BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		7.25	2300
														
9.00 - 16	TT	16	-	IND	255	925	427	2740	6.50 H	6.00 G	30	7.25	2300	

IND: Industrial

Performance



Durability



On/Off Road



CON STAR



CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12: 11 SDC: 12 SDC: W 10: W 11		4.00	
										km/h / bar	40	2725	
340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12: 11 SDC: 12 SDC: W 10: W 11		4.00	
										km/h / bar	40	2800	
380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11: 12 SDC: 12: W 13: 13 SDC: 13		4.00	
										km/h / bar	40	3150	
400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC: 13 SDC: 14		5.00	
										km/h / bar	40	4000	
400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC: 13 SDC: 14		4.00	
										km/h / bar	40	3250	
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12: 13 SDC: DW 13: DW 13 L: DW 14 L		5.00
											km/h / bar	40	4250
400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12: DW 13 L: DW 14 L		5.00	
										km/h / bar	40	4750	

IND: Industrial

Technology



Special
Compound

Performance



Stability




Traction



Cut and Chip
Resistance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
440/80 - 24 (17.0/80 - 24)	TL	22	168A8	IND	455	1315	610	3986	DW 14 L	DW 13: DW 13 L: DW 15 L		5.00		
												40	5600	
460/70 - 24 (17.5L - 24)	TL	-	159A8	IND	460	1250	-	-	DW 15 L	DW 14 L: DW 16 L		4.00		
												40	4375	
500/70 - 24 (19.5L - 24)	TL	-	164A8	IND	505	1300	579	3926	DW 16 L	DW 15 L: DW 18 L		4.00		
												40	5000	
Ø 26"	480/80 - 26 (18.4 - 26)	TL	-	160A8	IND	490	1410	643	4272	DW 15 L	DW 16 L		3.20	
													40	4500
Ø 28"	440/80 - 28 (16.9 - 28)	TL	-	156A8	IND	450	1420	632	4299	DW 14 L	DW 13: DW 13 L: DW 15 L		3.20	
													40	4000

Technology



Special
Compound

Performance



Stability




Traction



Cut and Chip
Resistance

IND: Industrial

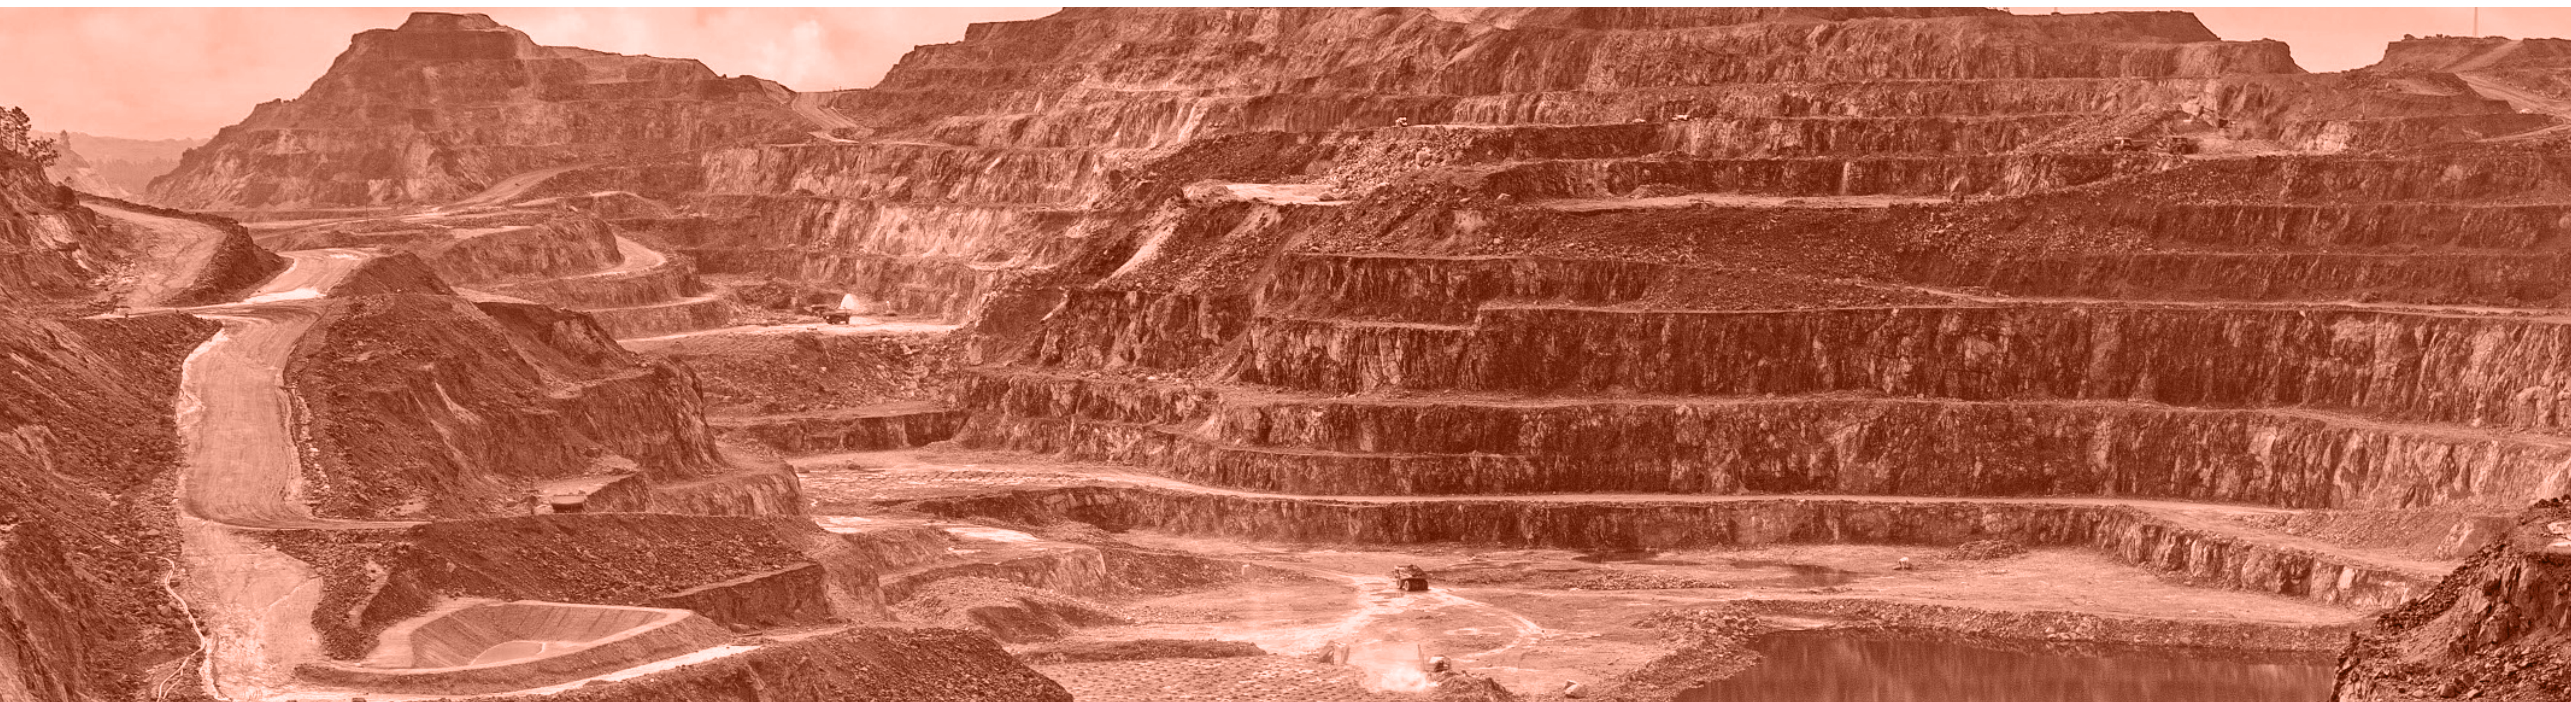

EM 937 (L)



EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar		
14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-		4.75	7.00	
												50	4625	-
												10	-	8500
14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-		4.75	7.00	
												50	4625	-
												10	-	8500
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		5.75	8.50	
												50	5150	-
												10	-	9500
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		5.75	8.50	
												50	5150	-
												10	-	9500
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-		6.50	9.25	
												50	5600	-
												10	-	10000
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-		6.50	9.25	
												50	5600	-
												10	-	10000
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-		7.25	10.00	
												50	6030	-
												10	-	10470
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-		7.25	10.00	
												50	6030	-
												10	-	10470

STD: Standard

Performance



EM 937 (L)

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
14.00 - 25	TT	20	-	A+ SB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	
14.00 - 25	TT	12	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	2.75	4.25	
												50	3350	-	
												10	-	6300	
14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												50	4625	-	
												10	-	8500	
14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												50	4625	-	
												10	-	8500	
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	5.75	8.50	
												50	5150	-	
												10	-	9500	
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	5.75	8.50	
												50	5150	-	
												10	-	9500	
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	

STD: Standard - A+ SB: Aramid + Steel Belted - AB: Aramid Belted - SB: Steel Belted

Performance



TR 459



TR 459 has been particularly designed for digging and loading operations as well as municipality and maintenance applications with tractors and backhoe loaders. It offers high stability and is available in two versions. The "special" version provides an extended tire life-cycle.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	400/70 - 20	TL	-	149A8	IND	410	1090	-	-	13	12 SDC: 13 SDC: 14		40	4.00 3250
Ø 24"	14.9 - 24	TL	8	137A8	IND	390	1244	562	3657	DW 13	DW 12: DW 11: DW 13 L		40	2.10 2300
	14.9 - 24	TL	12	145A8	IND	390	1244	562	3657	DW 13	DW 12: DW 11: DW 13 L		40	2.90 2900
	16.9 - 24	TL	8	142A8	IND	440	1310	590	3850	DW 15 L	DW 14 L		40	1.90 2650
	16.9 - 24	TL	10	145A8	IND	440	1310	590	3850	DW 15 L	DW 14 L		40	2.20 2900
	16.9 - 24	TL	12	149A8	IND	440	1310	590	3850	DW 15 L	DW 14 L		40	2.60 3250
	17.5L - 24	TL	8	139A8	IND	445	1270	557	3825	DW 15 L	DW 14 L		40	1.70 2430
	17.5L - 24	TL	10	144A8	IND	445	1270	557	3825	DW 15 L	DW 14 L		40	2.20 2800


Performance



Stability



Traction

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
17.5L - 24	TL	12	148 A8	IND	445	1270	557	3825	DW 15 L	DW 14 L		km/h / bar	2.70	
												40	3150	
18.4 - 24	TL	12	155 A8	IND	472	1375	610	4114	DW 16 L	DW 15 L		km/h / bar	2.50	
												40	3875	
19.5L - 24	TL	10	147 A8	IND	490	1333	585	4031	DW 16 L	-		km/h / bar	1.90	
												40	3075	
19.5L - 24	TL	12	151 A8	IND	490	1333	585	4031	DW 16 L	-		km/h / bar	2.30	
												40	3450	
19.5L - 24	TL	12	151 A8	IND SPL	490	1333	585	4031	DW 16 L	-		km/h / bar	2.30	
												40	3450	
21L - 24	TL	14	157 A8	IND	533	1378	605	3995	DW 18 L	-		km/h / bar	2.50	
												40	4125	
21L - 24	TL	12	155 A8	IND	533	1378	605	3995	DW 18 L	-		km/h / bar	2.20	
												40	3875	
Ø 26"	18.4 - 26	TL	12	156 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L		km/h / bar	2.50
													40	4000
18.4 - 26	TL	14	159 A8	IND	472	1425	628	4346	DW 16 L	DW 15 L		km/h / bar	2.90	
												40	4375	

Performance





Stability



Traction

IND: Industrial - IND SPL: Industrial Special



Ø 28"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
16.9 - 28	TL	8	145A8	IND	440	1410	640	4145	DW 15 L	DW 14 L		40	1.90	
													2900	
16.9 - 28	TL	10	148A8	IND	440	1410	640	4145	DW 15 L	DW 14 L		40	2.20	
													3150	
16.9 - 28	TL	12	152A8	IND	440	1410	640	4145	DW 15 L	DW 14 L		40	2.60	
													3550	
18.4 - 28	TL	12	157A8	IND	472	1475	653	4337	DW 16 L	DW 15 L		40	2.50	
													4125	
21L - 28	TL	12	157A8	IND	535	1480	-	-	DW 18 A	-		40	2.20	
													4125	
Ø 30"	16.9 - 30	TL	12	153A8	IND	440	1470	657	4484	DW 15 L	DW 14 L		40	2.70
														3650

Performance



Stability



Traction

IND: Industrial



TR 463



TR 463 has been specially designed for backhoe loaders and industrial tractors. Made of a superior tread compound and featuring a strong nylon casing, this tire stands for best results in industrial and OTR applications, and on construction sites. TR 463 provides excellent traction for drive wheels.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 24"	16.9 - 24	TL	12	149A8	IND	445	1300	584	3877	DW 15 L	DW 14 L	40	2.60
													3250
Ø 26"	18.4 - 26	TL	12	156A8	IND	480	1425	637	4215	DW 16 L	DW 15 L	40	2.50
													4000
Ø 28"	16.9 - 28	TL	12	152A8	IND	450	1405	636	4190	DW 15 L	DW 14 L	40	2.60
													3550

Performance




IND: Industrial



XL GRIP



XL GRIP has been specially designed for backhoe loaders that are employed in heavy-duty operations in excavation, dozing and loading applications. The non-directional tread pattern provides best traction and stability. The special tread compound results in excellent cut and chip resistance and an extended tread life.

Ø 16"	Tire size	TYPE	PR	LI/SS	LI/SS Free Rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
											Rec.	Alt.	km/h / bar	7.25	
															
9.00 - 16	TT	16	137 A6	-	STD	260	910	-	-	6.50 H	6.00 G	30	2300		
												km/h / bar	5.75		
9.00 - 16	TT	12	132 A6	-	STD	260	910	-	-	6.50 H	6.00 G	30	2000		
												km/h / bar	3.70		
Ø 18"	12.5/80 - 18	TT	12	-	142 A8	STD	305	980	-	-	W 9	11	10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													km/h / bar	3.70	
12.5/80 - 18	TL	12	-	142 A8	STD	305	980	-	-	W 9	11	10 FR	3710		
												25 FR	3155		
												30 FR	2970		
												40 FR	2650		
												km/h / bar	4.90		
12.5/80 - 18	TL	16	-	148 A8	STD	305	980	-	-	W 9	11	10 FR	4410		
												25 FR	3750		
												30 FR	3530		
												40 FR	3150		
												km/h / bar	8.30	7.60	
Ø 20"	10.00 - 20	TT	18	-	-	AB	285	1075	505	3257	7.5	7.0	10	4480	-
													40	-	3305
													km/h / bar	8.30	7.60
10.00 - 20	TT	18	-	-	A + SB	285	1075	505	3257	7.5	7.0	10	4480	-	
												40	-	3305	
												km/h / bar	8.30	7.60	
10.00 - 20	TT	18	-	-	IND	285	1075	505	3257	7.5	7.0	10	4480	-	
												40	-	3305	
												km/h / bar	8.30	7.60	

Performance



IND: Industrial - A+SB: Aramid + Steel Belted - AB: Aramid Belted

XL GRIP

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
Ø 20"	10.00 - 20	TT	18	-	SB	285	1075	505	3257	7.5	7.0		km/h / bar	8.30	7.60
													10	4480	-
													40	-	3305
	12.00 - 20	TT	20	-	IND	320	1155	545	3465	8.5	8.0		km/h / bar	8.60	7.90
													10	5680	-
													40	-	4190
Ø 24"	12.00 - 24	TT	20	-	IND	320	1250	585	3710	8.5	8.0		km/h / bar	8.25	8.25
													10	6900	-
													40	-	4830
	14.9 - 24	TT	12	145A8	IND	380	1240	575	3646	DW 13	DW 11: DW 12: DW 13L		km/h / bar	2.90	
													40	2900	
	Ø 28"	16.9-28	TT	12	152A8	IND	450	1400	640	4175	DW 15L	DW 14L		km/h / bar	2.60
40														3550	

Performance



IND: Industrial - SB: Steel Belted





COMPACT LOADER





Radial

MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

MULTIMAX
RADIAL MPT TIRES

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W.	O.D.	SLR	RC	RIM		Load capacity (kg/tire)									
						(mm)	(mm)	(mm)	(mm)	Rec.	Alt.										
						Ⓜ	Ⓜ	Ⓜ	Ⓜ	Ⓜ	Ⓜ										
280/80 R 18 IND	TL	-	132A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
											50	960	1140	1300	1480	1660	1780	2000	-	-	
											40	960	1140	1300	1480	1660	1780	2000	-	-	
											30	1030	1220	1395	1585	1780	1905	2140	-	-	
											25	1070	1270	1445	1645	1845	1980	2220	-	-	
											10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
											Static	1795	2210	2600	2990	3405	3705	4190	4420	4600	
											340/80 R 18 IND (12.5/80 R 18)	TL	-	143A8/B	STD	343	1001	458	3023	11; 11 SDC; W 11	W 10; 12; 12 SDC
50	1310	1555	1775	2020	2265	2430	2725	-	-												
40	1310	1555	1775	2020	2265	2430	2725	-	-												
30	1405	1665	1900	2165	2425	2600	2920	-	-												
25	1455	1725	1970	2240	2515	2695	3025	-	-												
10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090												
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												
Ø 20"	340/80 R 20 IND	TL	-	144A8/B	STD	343	1052	481	3212	11	W10; 11 SDC; W11; 12; 12 SDC	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
												50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
												Static	2515	3095	3640	4190	4770	5185	5865	6185	6440
												380/75 R 20 IND (14.5 R 20)	TL	-	148A8/B	STD	384	1074	483	3251	W 12
50	1500	1770	2040	2305	2575	2860	3005	3150	-	-											
40	1500	1770	2040	2305	2575	2860	3005	3150	-	-											
30	1610	1900	2195	2490	2780	3075	3220	3370	-	-											
25	1670	1975	2280	2585	2890	3195	3350	3500	-	-											
10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730											
Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250											
400/70 R 20 IND (16.0/70 R 20)	TL	-	149A8/B	STD	404	1068	476	3222	13	12 SDC; 13 SDC; 14	km/h / bar										
											50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	

STD: Standard

Technologies



Steel Belted



Special Antistatic Compound

Performance



Stability



Traction



High Puncture Resistance



Cut and Chip Resistance

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4				
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	533	3527	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	1705	2025	2310	2630	2950	3160	3550	-	-					
											40	1705	2025	2310	2630	2950	3160	3550	-	-					
											30	1825	2170	2470	2815	3155	3385	3800	-	-					
											25	1895	2250	2565	2920	3275	3515	3945	-	-					
											10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
											Static	3185	3920	4615	5310	6045	6575	7435	7840	8165					
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	553	3778	DW 13	DW 12; DW 13 L; DW 14 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
											50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	586	3958	DW 14 L	DW 13; DW 13 L; DW 15 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1250	568	3766	DW 15 L	DW 14 L; DW 16 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
											Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					
500/70 R 24 IND (19.5L R 24)	TL	-	164 A8/B	STD	503	1310	595	3940	DW 16 L	DW 15 L; DW 18 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2400	2850	3250	3700	4150	4450	5000	-	-					
											40	2400	2850	3250	3700	4150	4450	5000	-	-					
											30	2570	3050	3480	3960	4445	4765	5350	-	-					
											25	2665	3165	3610	4110	4610	4940	5550	-	-					
											10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
											Static	4485	5520	6500	7475	8510	9260	10465	11040	11500					
540/70 R 24 IND	TL	-	168 A8/B	STD	530	1366	611	4133	DW 16 L	DW 18 L	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
											50	2690	3195	3640	4145	4650	4985	5600	-	-					
											40	2690	3195	3640	4145	4650	4985	5600	-	-					
											30	2880	3420	3900	4440	4980	5340	5995	-	-					
											25	2990	3550	4045	4605	5165	5540	6220	-	-					
											10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400					
											Static	5025	6185	7280	8375	9535	10370	11725	12365	12880					

STD: Standard

Technologies



Steel Belted



Special Antistatic Compound

Performance



Stability



Traction





High Puncture Resistance



Cut and Chip Resistance

MULTIMAX MP 522

Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.2	3.2	3.4	3.6
																						
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750	
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350	


Ø 28"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW 14 L	DW 13; DW 13 L; DW 15 L	Load capacity (kg/tire)										
												km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
												440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13; DW 13 L; DW 15 L
40	2300	2725	2940	3150	3360	3575	3790	4000	-	-												
30	2480	2930	3155	3380	3605	3830	4055	4280	-	-												
25	2570	3040	3270	3505	3740	3970	4205	4440	-	-												
10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000												
Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200												

STD: Standard

Technologies



Performance

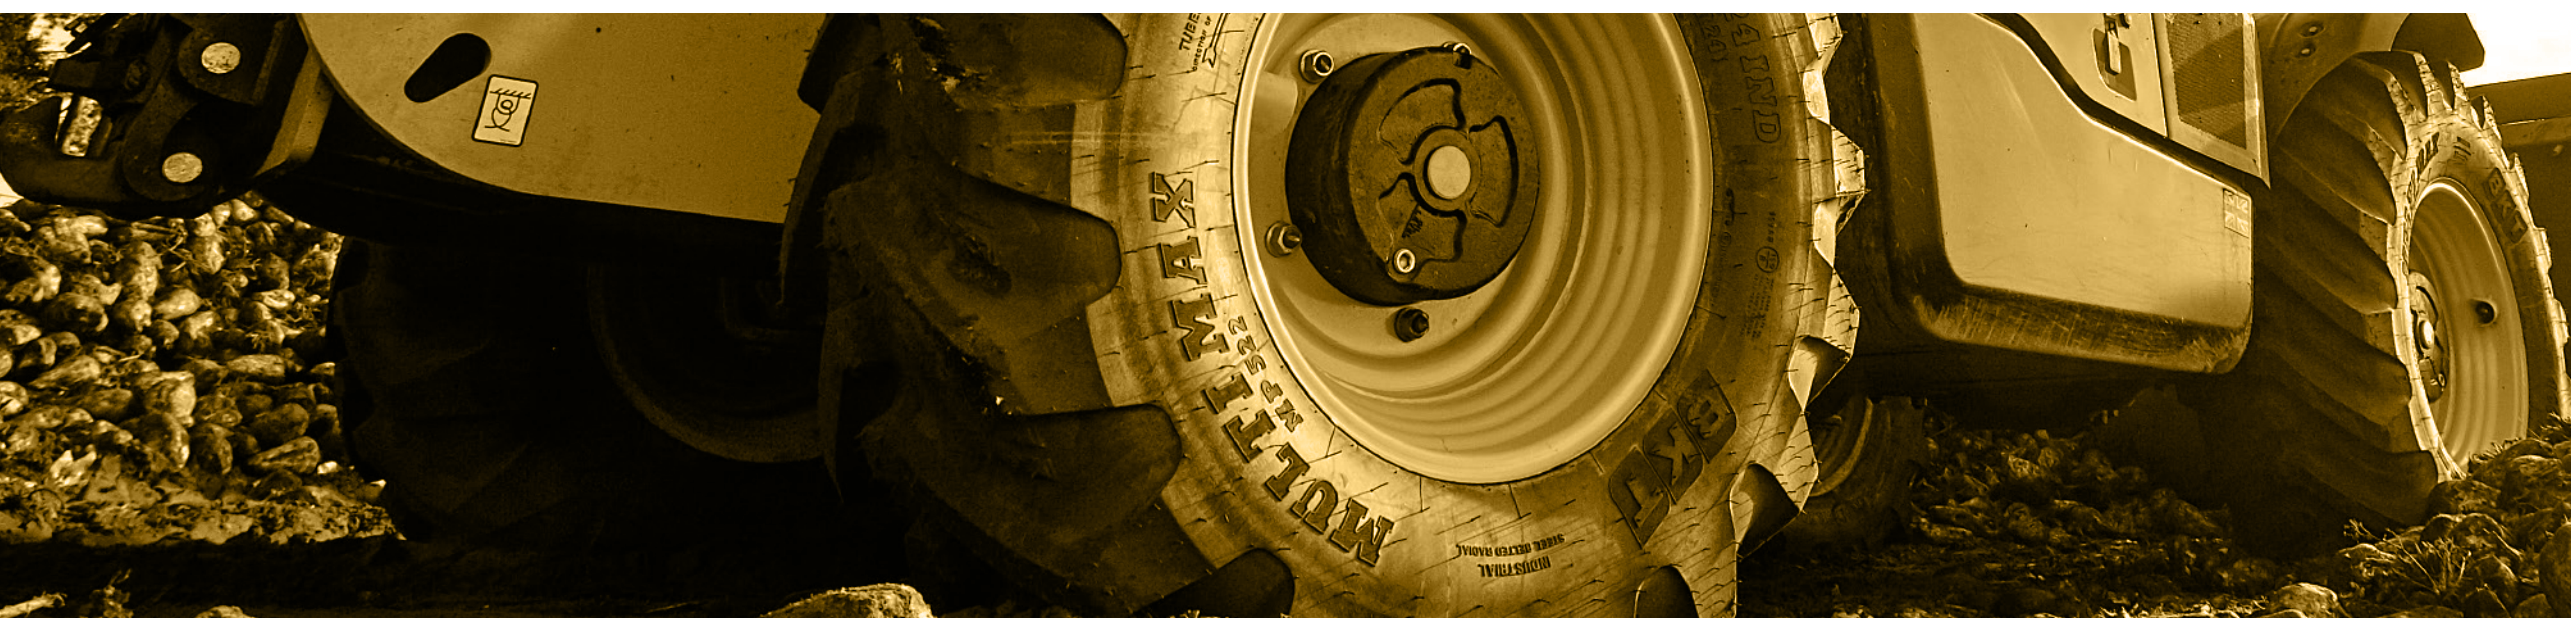

RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.	km/h / bar	1.2	1.6	2.0	2.2	2.4	2.6							
Ø 16"	11L R 16	TL	-	122 A8/B	STD	290	850	-	-	W 8	W 10 L	10	1265	1530	1790	1920	2055	2200							
												30	940	1165	1385	1500	1610	---							
												40	880	1085	1295	1395	1500	---							
																			50	1670	2060	2415	2805	3160	3550
Ø 24"	460/70 R 24 (17.5L R 24)	TL	-	152 A8/B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	40	1670	2060	2415	2805	3160	3550							
												30	1785	2205	2585	3000	3380	3800							
												25	1850	2285	2680	3115	3505	3940							
												10 Cyc	2505	3090	3620	4205	4740	5325							
												Static	3505	4325	5070	5890	6635	7455							
																			50	1535	1890	2245	2560	2915	3265
	460/70 R 24 (17.5L R 24)	TL	-	159 A8/156 B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	40	1705	2100	2495	2845	3240	3630	3895	4375					
												30	1775	2185	2595	2960	3370	3775	4050	4550					
												25	1805	2225	2645	3015	3435	3850	4130	4640					
												10 Cyc	2560	3150	3745	4270	4860	5445	5845	6565					
												Static	3920	4830	5740	6545	7450	8350	8960	10065					
																			50	1705	2100	2495	2845	3240	3630
	500/70 R 24 (19.5L R 24)	TL	-	157 A8/154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	30	1775	2185	2595	2960	3370	3775							
												25	1805	2225	2645	3015	3435	3850							
												10 Cyc	2560	3150	3745	4270	4860	5445							
												Static	3920	4830	5740	6545	7450	8350							
																			50	1535	1890	2245	2560	2915	3265
																			40	1705	2100	2495	2845	3240	3630

Technology



Special Antistatic Compound

Performance



Stability



Traction



High Load Capacity



Cut and Chip Resistance

STD: Standard



AT 603



AT 603 is a bias agro-industrial tire for implement machinery and backhoe loaders. AT 603 has been engineered to ensure great durability and traction on drive wheels providing best performance on every surface as well as excellent self-cleaning properties. The AT 603 "special" version has a reinforced casing, while the "HD" version offers improved cut and chip resistance.

Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	3.70
10.5/80 - 18	TL	10	119A8	131A8	HD	274	907	405	2657	W 9	W 8;9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	SPL	274	907	405	2657	W 9	W 8;9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
10.5/80 - 18	TL	10	119A8	131A8	STD	274	907	405	2657	W 9	W 8;9	10 FR	2730	
												25 FR	2320	
												30 FR	2185	
												40 FR	1950	
												10 DW	1905	
												25 DW	1620	
												30 DW	1525	
40 DW	1360													
12.5/80 - 18	TL	12	129A8	142A8	STD	308	987	448	3027	W 9	11	10 FR	3710	
												25 FR	3155	
												30 FR	2970	
												40 FR	2650	
												10 DW	2590	
												25 DW	2200	
												30 DW	2070	
40 DW	1850													

Technology



Performance



STD: Standard - HD: Heavy duty - SPL: Special



Ø 18"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.				
														km/h / bar		
12.5/80 - 18	TL	12	129A8	142A8	SPL	308	987	448	3027	W 9	11	3.70				
												10 FR	3710			
												25 FR	3155			
												30 FR	2970			
												40 FR	2650			
												10 DW	2590			
												25 DW	2200			
30 DW	2070															
40 DW	1850															
12.5/80 - 18	TL	16	135A8	148A8	STD	308	987	448	3027	W 9	11	4.90				
												10 FR	4410			
												25 FR	3750			
												30 FR	3530			
												40 FR	3150			
												10 DW	3050			
												25 DW	2595			
30 DW	2440															
40 DW	2180															
12.5/80 - 18	TL	18	138A8	150A8	STD	308	987	448	3027	W 9	11	5.50				
												10 FR	4690			
												25 FR	3985			
												30 FR	3750			
												40 FR	3350			
												10 DW	3305			
												25 DW	2810			
30 DW	2645															
40 DW	2360															
Ø 25"	15.5 - 25	TL	12	-	-	STD	410	1265	577	3861	12.00/1.3	12.00/1.3 (DC)	2.50	4.00	2.50	
													50	3250	-	-
													10	-	5600	-
													40	-	-	2650

Technology



Performance



STD: Standard - SPL: Special



AT 621



AT 621 is suitable for backhoe loaders and compact loaders in all digging and loading operations in agriculture. The AT 621 tire features an extra deep tread which ensures great cut and chip resistance and higher durability. In addition, this BKT tire ensures great durability and self cleaning properties. AT 621 is available in several versions to meet the most differing user requirements.

Ø 15"	Tire size	TYPE	PR	LI/SS	LI/SS Drive Wheel	LI/SS Free Rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
												Rec.	Alt.	km/h / bar	
33 X 12.5 - 15	TT	8	-	-	-	STD	318	851	385	2493	10.00 F	SDC	-	10	2130
															3.25
Ø 16"	12.5/70 - 16	TL	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	2240
															4.4
	12.5/70 - 16	TT	14	-	-	-	STD	315	855	385	2584	10 LB	-	10	2240
															4.4
	12.5/70 - 16	TL	8	-	-	-	STD	315	855	385	2584	10 LB	-	10	1645
														2.60	
9.00 - 16	TT	16	137 A6	-	-	IND	260	925	-	-	6.50 H	6.00 G	30	2300	
Ø 18"	12.5/80 - 18	TT	12	-	129 A8	142 A8	STD	308	987	434	2916	W 9	11.0	10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
														40 DW	1850
	12.5/80 - 18	TL	16	-	135 A8	148 A8	STD	308	987	434	2916	W 9	11.0	10 FR	4410
														25 FR	3750
														30 FR	3530
														40 FR	3150
														40 DW	2180

Performance



Durability



Traction



Self cleaning



Cut and Chip Resistance



Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS Drive Wheel	LI/SS Free Rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
												Rec.	Alt.		
												km/h / bar			
12.5/80 - 18	TL	12	-	129A8	142A8	STD	308	987	434	2916	W 9	11.0	3.70		
													10 FR		3710
													25 FR		3155
													30 FR		2970
													40 FR		2650
													10 DW		2590
													25 DW		2200
													30 DW		2070
40 DW		1850													
12.5/80 - 18	TT	16	-	135A8	148A8	STD	308	987	434	2916	W 9	11.0	4.90		
													10 FR		4410
													25 FR		3750
													30 FR		3530
													40 FR		3150
													10 DW		3050
													25 DW		2595
													30 DW		2440
40 DW		2180													
12.5/80 - 18	TL	16	-	135A8	148A8	IND HD	308	987	434	2916	W 9	11.0	4.90		
													10 FR		4410
													25 FR		3750
													30 FR		3530
													40 FR		3150
													10 DW		3050
													25 DW		2595
													30 DW		2440
40 DW		2180													
12.5/80 - 18	TL	12	-	129A8	142A8	SPL	308	987	434	2916	W 9	11.0	3.70		
													10 FR		3710
													25 FR		3155
													30 FR		2970
													40 FR		2650
													10 DW		2590
													25 DW		2200
													30 DW		2070
40 DW		1850													
15.5/60 - 18	TL	10	139A2	-	-	STD	400	950	428	2871	W 13	-	2.60		
													10		2430
15.5/60 - 18	TL	12	-	141A2	-	STD	400	950	428	2871	W 13	-	3.00		
													10		2575

Performance



STD: Standard - IND HD: Industrial Heavy Duty - SPL: Special

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	15.5/70 - 18 (400/70 - 18)	TL	10	-	STD	400	1030	474	3111	W 13	-		10	2700
													2.60	
													10	2700
Ø 19.5"	385/65 D 19.5	TL	16	165 A2	STD	390	1020	478	3136	11.75	12.25		km/h / bar	6.90
													10	5150
													0 (STATIONARY)	6700
Ø 20"	12.5 - 20	TT	12	-	STD	325	1040	-	-	11.0	-		km/h / bar	3.50
													40 FR	3350
													40 DW	2300
	17.5/65 - 20	TL	10	-	STD	450	1090	490	3294	W 14 L	-		km/h / bar	2.40
													10	3195
	400/70 - 20	TL	16	152 B/168 A2	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14		km/h / bar	4.00
													50	3550
													10	5600
	400/70 - 20	TL	-	149 A8	STD	405	1090	494	3271	13	12 SDC; 13 SDC; 14		km/h / bar	4.00
40													3250	
42 X 17 - 20	TT	10	-	STD	432	1073	480	3198	14,00 TG SDC	-		km/h / bar	3.00	
												10	3690	
Ø 24"	16.9 - 24	TL	12	149 A8	IND	450	1302	590	3906	DW 15 L	DW 14 L		km/h / bar	2.60
													40	3250
	17.5L - 24	TL	8	139 A8	STD	450	1255	558	3752	DW 15 L	DW 14 L		km/h / bar	1.70
													40	2430
	19.5L - 24	TL	12	151 A8	STD	482	1305	587	3936	DW 16 L	-		km/h / bar	2.30
													40	3450

Performance



AT 621

Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 26"	18.4 - 26	TL	12	156A8	STD	480	1425	636	4133	DW 16 L	DW 15 L		40	4000
													2.60	
Ø 28"	16.9 - 28	TT	12	152A8	IND	450	1410	639	4199	DW 15 L	DW 14 L		40	3550
													2.60	
Ø 28"	16.9 - 28	TL	12	152A8	IND	450	1410	639	4199	DW 15 L	DW 14 L		40	3550
													2.60	
Ø 30"	16.9 - 30	TL	12	153A8	IND	450	1460	670	4398	DW 15 L	DW 14 L		40	3650
													2.60	

Performance





STD: Standard - IND: Industrial



AT 625



AT 625 is suitable for backhoe loaders and compact loaders in all farming digging and loading operations. Its extra deep tread ensures increased puncture resistance and durability. AT 625 features excellent traction and stability as well as improved cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
14.9 - 24	TL	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L		km/h / bar	2.90	
												40	2900	
14.9 - 24	TT	12	145 A8	STD	400	1265	575	3800	DW 13	DW 11; DW 12; DW 13 L		km/h / bar	2.90	
												40	2900	
Ø 28"	16.9 - 28	TT	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L		km/h / bar	2.60
													40	3550
16.9 - 28	TL	12	152 A8	IND	450	1415	645	4254	DW 15 L	DW 14 L		km/h / bar	2.60	
												40	3550	
16.9 - 28	TT	12	152 A8	SPL	450	1415	645	4254	DW 15 L	DW 14 L		km/h / bar	2.60	
												40	3550	

Performance



STD: Standard - IND: Industrial - SPL: Special



CON STAR



CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
Ø 18"	340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12: 11 SDC: 12 SDC: W 10: W 11	km/h / bar	4.00
												40	2725
Ø 20"	340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12: 11 SDC: 12 SDC: W 10: W 11	km/h / bar	4.00
												40	2800
	380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11: 12 SDC: 12: W 13: 13 SDC: 13	km/h / bar	4.00
												40	3150
	400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC: 13 SDC: 14	km/h / bar	4.00
												40	3250
	400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC: 13 SDC: 14	km/h / bar	5.00
												40	4000
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12: 13 SDC: DW 13: DW 13 L: DW 14 L	km/h / bar	5.00
												40	4250
	400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12: DW 13 L: DW 14 L	km/h / bar	5.00
												40	4750

IND: Industrial

Technology



Special
Compound

Performance



Stability



Traction



Cut and Chip
Resistance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
440/80 - 24 (17.0/80 - 24)	TL	22	168A8	IND	455	1315	610	3986	DW 14 L	DW 13: DW 13 L: DW 15 L		40	5600	
												5.00		
460/70 - 24 (17.5L - 24)	TL	-	159A8	IND	460	1250	-	-	DW 15 L	DW 14 L: DW 16 L		40	4375	
												4.00		
500/70 - 24 (19.5L - 24)	TL	-	164A8	IND	505	1300	579	3926	DW 16 L	DW 15 L: DW 18 L		40	5000	
												4.00		
Ø 26"	480/80 - 26 (18.4 - 26)	TL	-	160A8	IND	490	1410	643	4272	DW 15 L	DW 16 L		40	4500
													3.20	
Ø 28"	440/80 - 28 (16.9 - 28)	TL	-	156A8	IND	450	1420	632	4299	DW 14 L	DW 13: DW 13 L: DW 15 L		40	4000
													3.20	

Technology



Performance




IND: Industrial



MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	3.50	2030	
											80	2180	
											50		
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	3.00	1930	
											80	2000	
											50		
Ø 20"	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	3.00	1850
												80	2065
												50	
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	3.50	2060	
											80	2300	
											50		
14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	3.00	2430	
											65	2500	
											50		

Performance





STD: Standard



MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-	km/h / bar	5.50	
												40 DW	4875	
												30 DW	5450	
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-	km/h / bar	7.50	
												40 DW	5800	
												30 DW	6500	

STD: Standard

Performance



MP 600



MP 600 is an agro-industrial tire, suitable for municipality/maintenance operations with telehandlers and implement machinery, providing a comfortable driving experience. This tire provides good traction and excellent self-cleaning properties along with an extended product life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS Drive wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													40 DW	50 DW
10.5 - 18	TL	10	-	STD	272	920	420	2740	9	9 SDC		km/h / bar	3.75	
												40 DW	1950	
												50 DW	1900	
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC		km/h / bar	3.00	
												40 DW	2060	
												50 DW	2000	
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC		km/h / bar	3.50	
												40 DW	2300	
												50 DW	2240	
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	STD	405	1085	-	-	13 SDC	12		km/h / bar	4.00
													40 DW	3550
													50 DW	3250
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	14	-	STD	405	1185	545	3530	13 SDC	12		km/h / bar	3.50
													40 DW	3650
													50 DW	3550
400/70 - 24 (16.0/70 - 24)	TL	10	-	STD	405	1185	545	3530	13 SDC	12		km/h / bar	2.50	
												40 DW	2975	
												50 DW	2900	
400/70 - 24 (16.0/70 - 24)	TL	18	158A8	STD	405	1185	545	3530	13 SDC	12		km/h / bar	4.50	
												40 DW	4250	
												50 DW	4125	
400/70 - 24 (16.0/70 - 24)	TL	14	-	SPL	405	1185	545	3530	13 SDC	12		km/h / bar	3.50	
												40 DW	3650	
												50 DW	3550	

STD: Standard - SPL:Special

Performance



Durability



Traction



Self cleaning



Comfort

SNOW RIDE (A)



SNOW-RIDE is particularly suitable for municipality and maintenance applications in winter conditions with compact loaders and skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks and ensures a longer tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
12.5/70 - 16	TL	6	-	STD	315	850	385	2550	10 LB	-		10	2.00	1410
												10	3.20	1855
10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-		10	5.20	2135
												10	3.10	1590
12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-		10	2.80	1915
												10	4.50	2540
15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-		10	2.60	2400
												10	2.40	3195

STD: Standard

Technology



Snow Pattern

Performance



Durability



Traction

LOADER





Radial

EARTHMAX SR 22



EARTHMAX SR 22 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders operating in extreme winter conditions on ice or snow. Operators will appreciate both excellent traction and stability provided by the large and non-directional tread design. Special tread compound suitable for cold climate. The full depth sipes on tread blocks give maximum traction on snow.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)														
										Rec.	Alt.	km/h / bar														
										2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50							
14.00 R 24	TL	*	153 A8/175 A2	CRC	366	1370	625	4141	8.00 TG	9.00 GR; 10.00 VA	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-					
											10	-	-	-	-	-	-	-	-	-	6700	6900				
Ø 25"	15.5 R 25	TL	*	146 A8/169 A2	CRC	385	1275	557	3841	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-	
												10	-	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800
17.5 R 25	TL	*	153 A8/176 A2	CRC	452	1350	590	3950	14.00/1.5	14.00/1.3 (DC)	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-		
											10	-	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100	
17.5 R 25	TL	**	167 B/182 A2	CRC	452	1350	590	3950	14.00/1.5	14.00/1.3 (DC)	40	4375	4625	4750	5000	5150	5450	-	-	-	-	-				
											50	-	-	-	-	-	-	-	-	-	-	-	-	-		
											10	-	-	-	-	-	-	7300	7500	7750	8000	8250	8500			
20.5 R 25	TL	**	177 B/193 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/2.0 IF; 17.00/1.7	40	5800	6150	6500	6700	6900	7300	-	-	-	-	-				
											50	-	-	-	-	-	-	-	-	-	-	-	-			
											10	-	-	-	-	-	-	9750	10000	10300	10900	11200	11500			
20.5 R 25	TL	*	161 A8/186 A2	CRC	525	1490	640	4315	17.00/2.0	17.00/2.0 IF; 17.00/1.7	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-			
											50	-	-	-	-	-	-	-	-	-	8000	8250	8750	9000	9500	
											10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
23.5 R 25	TL	*	170 A8/195 A2	CRC	610	1614	709	4863	19.50/2.5	-	40	3150	3550	4000	4500	4875	5300	5600	6000	-	-	-	-			
											50	-	-	-	-	-	-	-	-	-	-	-	-			
											10	-	-	-	-	-	-	-	-	-	10300	10600	11200	11500	12150	
23.5 R 25	TL	**	185 B/201 A2	CRC	610	1614	709	4863	19.50/2.5	-	40	7500	7750	8250	8500	9000	9250	-	-	-	-	-				
											50	-	-	-	-	-	-	-	-	-	-	-	-			
											10	-	-	-	-	-	-	12500	12850	13200	13600	14000	14500			

STD: Standard - CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Stability



LOADER

Radial

EARTHMAX SR 25 PLUS



EARTHMAX SR 25 PLUS (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50
14.00 R 24	TL	*	153 A8/175 A2	CRC	359	1372	626	4146	8.00 TG	9.00 GR	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-	
											10	-	-	-	-	-	-	-	-	6700	6900	

STD: Standard - CRC: Cut Resistant Compound

Technologies



All Steel

Performance



Traction



Self cleaning



Durability





LOADER

Radial

EARTHMAX SR 31



EARTHMAX SR 31 is an All Steel radial tire specially designed for articulated dump trucks and wheel loaders. Its multiply steel belts provide extraordinary strength and stability, whilst the non-directional rigid block pattern stands for both excellent traction and maneuverability even on muddy ground. In addition to outstanding riding comfort, EARTHMAX SR 31 features a special tread compound which is particularly cut-and-heat resistant. The radial casing structure also provides reduced rolling resistance offering significant fuel savings.

EARTHMAX
RADIAL OTR TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)						
										Rec.	Alt.							
												km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25
20.5 R 25	TL	***	177 B/186 A2	CRC	540	1480	663	4449	17.00/2.0	-		50	5800	6150	6500	6700	6900	7300
												10	8000	8250	8750	9000	9500	-
												km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25
23.5 R 25	TL	***	185 B/195 A2	CRC	612	1607	711	4797	19.50/2.5	-		50	7500	7750	8250	8500	9000	9250
												10	10300	10600	11200	11500	12150	-
												km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25
26.5 R 25	TL	***	193 B/202 A2	CRC	689	1742	766	5200	22.00/3.0	22.00/3.0 IF		50	9500	9750	10300	10600	11200	11500
												10	12850	13200	14000	14500	15000	-
												km/h / bar	0,3	4.25	4.50	4.75	5.00	5.25
26.5 R 25	TL	**	209 A2	CRC	689	1742	766	5200	22.00/3.0	22.00/3.0 IF		50	15500	16000	16500	17000	18000	18500
												10	15500	16000	16500	17000	18000	18500
												km/h / bar	5.25	5.50	5.75	6.00	6.25	6.50
29.5 R 25	TL	**	216 A2	CRC	765	1861	818	5555	25.00/3.5	25.00/3.5 IF		50	19000	19500	20000	20600	21200	22400
												10	19000	19500	20000	20600	21200	22400
												km/h / bar	5.25	5.50	5.75	6.00	6.25	6.50
29.5 R 25	TL	***	200 B/208 A2	CRC	765	1861	818	5555	25.00/3.5	25.00/3.5 IF		50	11500	11800	12500	12850	13600	14000
												10	15500	16000	17000	17500	18000	-
												km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25

CRC: Cut Resistant Compound

Technologies



All Steel



Block Pattern

Performance



Comfort



Traction



Cut Resistance



Stability



Durability



LOADER

Bias

GR 288



GR 288 (G-2/L-2) is a versatile bias-ply tire for graders or loaders. It is ideal for use in construction, site preparation, road building, and other soft or muddy environments. The self-cleaning tread pattern provides excellent traction, and you can expect a long tire life as a result of the special cut-and-chip-resistant compound.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	2.50	4.00
15.5 - 25	TL	12	-	STD	385	1270	572	3772	12.00/1.3	12.00/1.3 (DC)	40	2650	-	
											10	-	5600	
											km/h / bar	2.00	3.50	
17.5 - 25	TL	12	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.5 (DC); 14.00/1.3 (DC)	40	2900	-	
											10	-	6150	
											km/h / bar	2.75	4.75	
17.5 - 25	TL	16	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	40	3350	-	
											10	-	7300	
											km/h / bar	3.25	5.75	
17.5 - 25	TL	20	-	STD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	40	3650	-	
											10	-	8250	
											km/h / bar	3.25	5.75	
17.5 - 25	TT	20	-	DB HD	445	1330	596	3950	14.00/1.5	14.00/1.3 (DC)	40	3650	-	
											10	-	8250	
											km/h / bar	2.25	3.50	
20.5 - 25	TL	16	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	40	4000	-	
											10	-	8250	
											km/h / bar	2.75	4.50	
20.5 - 25	TL	20	-	STD	520	1480	656	4396	17.00/2.0	17.00/1.7	40	4500	-	
											10	-	9500	
											km/h / bar	2.00	3.00	
23.5 - 25	TL	16	-	STD	595	1610	708	4782	19.50/2.5	-	40	4750	-	
											10	-	9500	
											km/h / bar	2.50	3.75	
23.5 - 25	TL	20	-	STD	595	1610	708	4782	19.50/2.5	-	40	5450	-	
											10	-	10900	

Performance



STD: Standard - DB HD: Dual Bead Heavy Duty





LOADER

Bias

EM 936 LOADER SPECIAL



EM 936 LOADER SPECIAL has been specially designed for telehandlers in loading applications. It features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar	3.50	
	16.0/70 - 20 (405/70 - 20)	TL	14	149 B	STD	405	1090	480	3295	13 SDC	13		50	3250

STD: Standard

Performance



Comfort



Handling & Comfort



Heavy Duty



Self cleaning



Traction





LOADER

Bias

EM 937



EM 937 (E-3/L-3) has been specially designed for loaders and backhoe loaders in dig and load applications, depending on the size. It features excellent durability and provides cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar		
14.00 - 24	TT	20	-	STD	375	1368	628	4050	10.00 W	-		4.75	7.00	
												50	4625	-
												10	-	8500
14.00 - 24	TL	20	-	STD	375	1368	628	4050	10.00 W	-		4.75	7.00	
												50	4625	-
												10	-	8500
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		5.75	8.50	
												50	5150	-
												10	-	9500
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		5.75	8.50	
												50	5150	-
												10	-	9500
14.00 - 24	TT	28	-	STD	375	1368	628	4050	10.00 W	-		6.50	9.25	
												50	5600	-
												10	-	10000
14.00 - 24	TL	28	-	STD	375	1368	628	4050	10.00 W	-		6.50	9.25	
												50	5600	-
												10	-	10000
14.00 - 24	TT	32	-	STD	375	1368	628	4050	10.00 W	-		7.25	10.00	
												50	6030	-
												10	-	10470
14.00 - 24	TL	32	-	STD	375	1368	628	4050	10.00 W	-		7.25	10.00	
												50	6030	-
												10	-	10470

STD: Standard

Performance



Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar	2.75	4.25
													50	10	
14.00 - 25	TT	12	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	2.75	4.25	
												50	3350	-	
												10	-	6300	
14.00 - 25	TT	20	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												50	4625	-	
												10	-	8500	
14.00 - 25	TL	20	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												50	4625	-	
												10	-	8500	
14.00 - 25	TT	24	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	5.75	8.50	
												50	5150	-	
												10	-	9500	
14.00 - 25	TL	24	-	STD	375	1368	620	4105	10.00/1.5	-		km/h / bar	5.75	8.50	
												50	5150	-	
												10	-	9500	
14.00 - 25	TT	20	-	AB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	
14.00 - 25	TT	20	-	A + SB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	
14.00 - 25	TT	20	-	SB	375	1368	620	4105	10.00/1.5	-		km/h / bar	4.75	7.00	
												40	4765	-	
												10	-	8500	

STD: Standard - AB: Aramid Belted - A + SB: Aramid Steel Belted

Performance



Cut and Chip Resistance



Durability



Heavy Duty



LOADER

Bias

LOADER PLUS (L-3)



LOADER PLUS (L-3) is a bias-ply tire specially designed for loaders. The tread compound provides cut-and-chip-resistant properties and suites best for loading and dozing operations.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
													10	7.00
14.00 - 25	TT	20	-	STD	375	1368	630	4050	10.00/1.5	-		10	8500	
												km/h / bar	4.75	
17.5 - 25	TT	16	-	STD	440	1345	622	3980	14.00/1.5	-		10	7300	
												km/h / bar	4.75	
17.5 - 25	TL	16	-	STD	440	1345	622	3980	14.00/1.5	-		10	7300	
												km/h / bar	4.75	
17.5 - 25	TT	20	-	DB	440	1345	622	3980	14.00/1.5	-		10	8250	
												km/h / bar	5.75	
20.5 - 25	TT	16	-	STD	540	1490	685	4410	17.00/2.0	-		10	8250	
												km/h / bar	3.50	
20.5 - 25	TL	16	-	STD	540	1490	685	4410	17.00/2.0	-		10	8250	
												km/h / bar	3.50	
20.5 - 25	TT	20	-	STD	540	1490	685	4410	17.00/2.0	-		10	9500	
												km/h / bar	4.50	

STD: Standard - DB: Dual Bead

Performance



Cut Resistance



Traction





LOADER

LOADER PLUS (L-3)

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	20.5 - 25	TL	20	-	STD	540	1490	685	4410	17.00/2.0	-		10	4.50 9500
	23.5 - 25	TT	16	-	STD	600	1640	749	4855	19.50/2.5	-		10	3.00 9500
	23.5 - 25	TL	16	-	STD	600	1640	749	4855	19.50/2.5	-		10	3.00 9500
	23.5 - 25	TL	24	-	STD	600	1640	749	4855	19.50/2.5	-		10	4.75 12500
	23.5 - 25	TT	20	-	STD	600	1640	749	4855	19.50/2.5	-		10	3.75 10900
	23.5 - 25	TL	20	-	STD	600	1640	749	4855	19.50/2.5	-		10	3.75 10900
	26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-		10	4.75 15500
	26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-		10	5.50 17000
	29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-		10	4.25 17500
	29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-		10	5.00 19250

STD: Standard

Performance



Cut Resistance



Traction



LOADER

Radial

BK-LOADER 53



BK-LOADER 53 is an aramid-belted tire designed for loaders in industrial applications. The unique tread design provides best lateral stability in addition to extended tread wear and extraordinary resistance against cuts and punctures thanks to the extra deep tread. BK-LOADER 53 features outstanding self-cleaning properties as well as excellent grip and traction on both wet and dry surfaces. This tire is particularly suitable for recycling operations.

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.5	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
405/70 R 20	TL	-	155 A2/ 151 A4	STD	407	1097	511	3339	13	14; 13 SDC; 12; 12 SDC		20 TRANSPORT	1210	1520	1805	2090	2375	2640	2905	3170	3450
												10 LOADING	1375	1725	2050	2375	2700	3000	3300	3600	3875
												Static	2200	2750	3275	3800	4325	4800	5300	5750	6200

STD: Standard

Performance



Cut and Chip Resistance



High Puncture Resistance



Self cleaning



Traction





LOADER

Bias

ROCK GRIP



ROCK GRIP (L-4) is a bias-ply tire designed for wheel loader operations in severe loading service and on rough ground conditions. Its specially designed, cut-and-chip-resistant tread compound minimizes punctures thereby reducing machine downtime. The (L-4) tread depth provides an extended tire life-cycle.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
14.00 - 25	TT	24	-	STD	375	1410	649	4173	10.00/1.5	-	10	8.50	9500
14.00 - 25	TL	24	-	STD	375	1410	649	4173	10.00/1.5	-	10	8.50	9500
14.00 - 25	TT	28	-	STD	375	1410	649	4173	10.00/1.5	-	10	9.25	10000
14.00 - 25	TL	28	-	STD	375	1410	649	4173	10.00/1.5	-	10	9.25	10000
14.00 - 25	TL	32	-	STD	375	1410	649	4173	10.00/1.5	-	10	10.00	10500

STD: Standard

Technologies



Performance





LOADER

Bias

XL GRIP



XL GRIP (E-3/L-3) is a wide-base bias-ply tire for loaders designed to minimize cuts and punctures in heavy-duty loading applications. It provides exceptional traction as well as an extended tire life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.			
										km/h / bar			4.00	5.15
16.0/70 - 20	TL	16	-	STD	405	1090	480	3295	13 SDC	-		50	3515	-
												10	-	5735
												km/h / bar		
15.5 - 25	TL	12	-	STD	402	1285	573	3767	12.00/1.3	12.00/1.3 (DC)		50	3250	-
												10	-	5600
												km/h / bar		
17.5 - 25	TL	12	-	STD	435	1345	622	3980	14.00/1.5	-		50	3650	-
												10	-	6150
												km/h / bar		
17.5 - 25	TL	16	-	STD	435	1345	622	3980	14.00/1.5	-		50	4250	-
												10	-	7300
												km/h / bar		
17.5 - 25	TL	20	-	STD	435	1345	622	3980	14.00/1.5	-		50	5000	-
												10	-	8250
												km/h / bar		
17.5 - 25	TT	20	-	DB	435	1345	622	3980	14.00/1.5	-		50	5000	-
												10	-	8250
												km/h / bar		
17.5 - 25	TL	24	-	DB	435	1345	622	3980	14.00/1.5	-		50	5000	-
												10	-	8250
												km/h / bar		
20.5 - 25	TL	12	-	STD	530	1485	682	4395	17.00/2.0	-		50	4500	-
												10	-	6700

Performance



STD: Standard - DB: Dual Bead



Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar	2.75	3.50
													50	10	
20.5 - 25	TL	16	-	STD	530	1485	682	4395	17.00/2.0	-		km/h / bar	2.75	3.50	
												50	5450	-	
												10	-	8250	
20.5 - 25	TL	20	-	STD	530	1485	682	4395	17.00/2.0	-		km/h / bar	3.25	4.50	
												50	6000	-	
												10	-	9500	
20.5 - 25	TL	24	-	STD	530	1485	682	4395	17.00/2.0	-		km/h / bar	4.00	5.25	
												50	6700	-	
												10	-	10300	
23.5 - 25	TL	16	-	STD	600	1625	742	4810	19.50/2.5	-		km/h / bar	2.25	3.00	
												50	6150	-	
												10	-	9500	
23.5 - 25	TL	20	-	STD	600	1625	742	4810	19.50/2.5	-		km/h / bar	3.00	3.75	
												50	7300	-	
												10	-	10900	
23.5 - 25	TL	24	-	STD	600	1625	742	4810	19.50/2.5	-		km/h / bar	3.50	4.75	
												50	8000	-	
												10	-	12500	
23.5 - 25	TL	24	-	AB HD	600	1625	742	4810	19.50/2.5	-		km/h / bar	3.50	4.75	
												50	8000	-	
												10	-	12500	
26.5 - 25	TL	20	-	STD	680	1740	796	5150	22.00/3.0	-		km/h / bar	2.50	3.50	
												50	8250	-	
												10	-	13200	
26.5 - 25	TL	28	-	STD	680	1740	796	5150	22.00/3.0	-		km/h / bar	4.75		
												10	15500		

STD: Standard - AB HD: Aramid Belted HD

Performance

Traction

Stability

Durability

Cut Resistance




LOADER

XL GRIP

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
26.5 - 25	TL	32	-	STD	680	1740	796	5150	22.00/3.0	-		10	5.50	17000
												5.00	17500	
29.5 - 25	TL	28	-	STD	760	1860	849	5544	25.00/3.5	-		10	4.25	17500
												5.00	19250	
29.5 - 25	TL	32	-	STD	760	1860	849	5544	25.00/3.5	-		10	5.00	19250
												5.00	19250	

STD: Standard

Performance



Traction



Stability



Durability



Cut Resistance





LOADER

Bias

SNOW RIDE (B)



SNOW-RIDE is particularly suitable for road applications in winter conditions with skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
16.9 - 24	TL	12	-	STD	429	1310	590	3930	DW 15 L	DW 14 L		km/h / bar	2.60	
												40	3250	
18.4 - 24	TL	12	-	STD	475	1375	625	4089	DW 16 L	DW 15 L		km/h / bar	2.50	
												40	3875	
Ø 25"	15.5 - 25	TL	12	-	STD	395	1280	569	3818	12.00/1.3	-		km/h / bar	4.00
													10	5600
	17.5 - 25	TL	12	-	STD	445	1348	608	4044	14.00/1.5	-		km/h / bar	3.50
													10	6150
	17.5 - 25	TL	16	-	STD	445	1348	608	4044	14.00/1.5	-		km/h / bar	4.75
													10	7300
20.5 - 25	TL	16	-	STD	537	1492	652	4423	17.00/2.0	17.00/1.7		km/h / bar	3.50	
												10	8250	
23.5 - 25	TL	16	-	STD	612	1630	693	4800	19.50/2.5	-		km/h / bar	3.00	
												10	9500	

STD: Standard

Performance



Snow Pattern



Traction



Stability



LOADER

Bias

SNOW RIDE PLUS



SNOW RIDE - PLUS is particularly suitable for road applications in winter conditions. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	3.50
20.5 - 25	TL	16	-	STD	525	1485	656	4370	17.00/2.0	17.00/1.7	10	8250	
23.5 - 25	TL	16	-	STD	600	1630	694	4765	19.50/2.5	-	10	9500	

STD: Standard

Performance



Snow Pattern



Traction



Stability





LOADER

Bias

ROCK STAR (L-4)



ROCK STAR LOADER has been specifically designed for cranes and loaders. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR LOADER is a 24-ply-rated tire ensuring outstanding load capacity and extraordinary durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		8.50	9500
14.00 - 24	TT	24	-	STD	390	1425	-	-	10.00 WA	10.00 VA	10	8.50	9500	

STD: Standard

Performance



Durability



High Load Capacity



Traction





COMPACTOR



PAC MASTER

PAC MASTER is a bias tire for compactors. It shows high stability and ensures an extended tire life-cycle. It is made of a special compound that provides particular heat resistance.



COMPACTOR

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	Load capacity (kg/tire)
205/60 - 15	TL	6	-	STD	200	640	-	-	6.0 J	7.0 J		3.25		
												10	1060	
												15	850	
7.50 - 15	TT	6	-	STD	225	790	-	-	6.0	6.5		4.00		
												10	1850	
												15	1500	
7.50 - 15	TT	12	-	STD	225	790	-	-	6.0	6.5		7.50		
												10	2650	
												15	2120	
7.50 - 15	TT	14	-	STD	225	790	-	-	6.0	6.5		8.75		
												10	2900	
												15	2300	
8.5/90 - 15 K	TL	6	-	STD	230	785	-	-	6.0	5.50 F		3.50		
												10	1800	
												15	1450	
9.5/65 - 15	TT	6	-	STD	235	675	-	-	7.0	-		3.25		
												10	1320	
												15	1060	
9.5/65 - 15	TL	6	-	STD	235	675	-	-	7.0	-		3.25		
												10	1320	
												15	1060	

STD: Standard

Performance



Durability



Heat Resistance



Stability



Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 16"	10.5/80 - 16	TL	14	-	STD	275	810	382	2480	8.0	-		6.00	
													10	2775
													15	2250
	10.5/80 - 16	TL	6	-	STD	275	810	382	2480	8.0	-		4.50	
													10	1850
													15	1500
	7.50 - 16	TT	14	-	STD	225	815	-	-	6.0	6.5		8.75	
													10	2900
													15	2300
Ø 20"	11.00 - 20	TT	18	-	STD	291	1070	494	3310	8.0	8.5		8.25	
													10	5800
													15	4625
	11.00 - 20	TT	16	-	STD	291	1070	494	3310	8.0	8.5		7.25	
													10	5450
													15	4375
	14/70 - 20	TT	12	-	STD	380	975	-	-	11 TG	-		4.50	
													10	4000
													15	3150
	9.00 - 20	TT	12	-	STD	275	1016	471	3107	7.0	7.5		6.25	
													10	4000
													15	3150
	9.00 - 20	TT	14	-	STD	275	1016	471	3107	7.0	7.5		7.25	
													10	4375
													15	3450
	9.00 - 20	TT	16	-	STD	275	1016	471	3107	7.0	7.5		8.25	
													10	4750
													15	3750

STD: Standard

Performance



Durability



Heat Resistance





Stability

 Bias

PAC MASTER PLUS

PAC MASTER PLUS is a bias tire for compactors. It features high stability and a wider contact area. It is made of a special compound providing high heat resistance. PAC MASTER PLUS ensures an extended tire life-cycle.



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
Ø 15"	7.50 - 15	TT	14	-	STD	225	790	375	2385	6.0	6.5	8.75	
												10	2900
												15	2300
Ø 20"	9.00 - 20	TT	14	-	STD	270	1005	-	-	7.0	7.5	7.25	
												10	4375
												15	3445
Ø 20"	9.00 - 20	TT	10	-	STD	270	1005	-	-	7.0	7.5	5.25	
												10	3650
												15	2900
Ø 20"	9.00 - 20	TT	12	-	STD	270	1005	-	-	7.0	7.5	6.25	
												10	4000
												15	3150

Performance



Durability



Heat Resistance



Stability

STD: Standard



TR 387



TR 387 is an agro-industrial tire suitable for sugar cane trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	2.40
												30	1250
11.2 - 24	TL	-	116 A6	STD	292	1075	496	3228	W 10	W 9			
Ø 26"	18.4 - 26	TL	10	142 A6	STD	475	1430	635	4150	DW 16 L	DW 15 L	km/h / bar	1.80
												30	2650
	18.4 - 26	TL	12	146 A6	STD	475	1430	635	4150	DW 16 L	DW 15 L	km/h / bar	2.30
												30	3000
	18.4 - 26	TL	16	152 A6	HD	475	1430	635	4150	DW 16 L	DW 15 L	km/h / bar	2.90
												30	3550
	23.1 - 26	TL	8	145 A6	STD	592	1560	690	4685	DW 20 B	-	km/h / bar	1.10
												30	2900
	23.1 - 26	TL	12	153 A6	STD	592	1560	690	4685	DW 20 B	-	km/h / bar	1.70
												30	3650
23.1 - 26	TL	16	159 A6	STD	592	1560	690	4685	DW 20 B	-	km/h / bar	2.30	
											30	4375	
23.1 - 26	TL	16	159 A6	DB	592	1560	690	4685	DW 20 B	-	km/h / bar	2.30	
											30	4375	
23.1 - 26	TT	18	161 A6	DB HD	592	1560	690	4685	DW 20 B	-	km/h / bar	2.60	
											30	4625	

Performance



High Load Capacity



Durability

STD: Standard - HD: Heavy Duty - DB: Dual Bead - DB HD: Dual Bead Heavy Duty

Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 26"	23.1 - 26	TL	18	161 A6	DB HD	592	1560	690	4685	DW 20 B	-		30	2.60 4625
	23.1 - 26	TL	12	164 A6	HD	592	1560	690	4685	DW 20 B	-		30	1.70 5000
	23.1 - 26	TL	18	161 A6	HD DB SPL	592	1560	690	4685	DW 20 B	-		30	2.60 4625
Ø 28"	12.4 - 28	TL	8	123 A6	STD	325	1200	550	3576	W 11	W 9;W 10		30	2.30 1550
	16.9 - 28	TL	8	135 A6	STD	440	1400	630	4074	DW 15 L	DW 14 L		30	1.70 2180
Ø 30"	16.9 - 30 (14 - 30)	TL	8	137 A6	STD	440	1450	655	4220	DW 15 L	DW 14 L		30	1.70 2300
	18.4 - 30 (15 - 30)	TL	8	139 A6	STD	475	1530	680	4395	DW 16 L	DW 15 L		30	1.40 2430
	18.4 - 30 (15 - 30)	TT	14	151 A6	HD	475	1530	680	4395	DW 16 L	DW 15 L		30	2.60 3450
	620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.30 4625
	620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.60 5000

Performance



High Load Capacity



Durability

STD: Standard - DB HD: Dual Bead Heavy Duty - HD DB SPL: Heavy Duty Dual Bead Special - HD: Heavy Duty - DB: Dual Bead



Ø 32"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)
										Rec.	Alt.		
										DH 21 B; DH 21 H; DH 21 HB			
24.5 - 32	TL	16	164A6	DB HD	625	1755	790	5226	DH 21		30	2.10 5000	

DB HD: Dual Bead Heavy Duty

Performance



High Load Capacity



Durability



 Bias



TR 387 IND



TR 387 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 30"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.30	
												30	4625	
620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.60	
												30	5000	
Ø 32"	24.5 - 32	TL	16	164 A6	DB HD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB		30	2.10
													30	5000

DB: Dual Bead - DB HD: Dual Bead Heavy Duty

Performance



TR 390

TR 390 is an agro-industrial tire suitable for sugar cane trailers and compactors. TR 390 features high load capacity and increased durability. Its "dual bead HD" version is particularly suitable for industrial tractors and transport operations using trailers, whereas its "dual bead HD special" version is ideal for heavy-duty service.



Ø 26"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
23.1 - 26	TL	8	145 A6	STD	587	1560	690	4545	DW 20 B	-		30	1.10 2900
23.1 - 26	TL	12	153 A6	STD	587	1560	690	4545	DW 20 B	-		30	1.70 3650
23.1 - 26	TL	16	159 A6	STD	587	1560	690	4545	DW 20 B	-		30	2.30 4375
23.1 - 26	TL	18	161 A6	DB HD	587	1560	690	4545	DW 20 B	-		30	2.60 4625
23.1 - 26	TL	18	161 A6	HD DB SPL	587	1560	690	4545	DW 20 B	-		30	2.60 4625
28L - 26	TL	12	154 A6	STD	714	1560	690	4545	DW 25 B	DW 23 B		30	1.40 3750
28L - 26	TL	16	160 A6	STD	714	1560	690	4545	DW 25 B	DW 23 B		30	1.90 4500
28L - 26	TL	20	172 A6	DB HD	714	1560	690	4545	DW 25 B	DW 23 B		30	2.80 6300

STD: Standard - HD DB SPL: Heavy Duty Dual Bead Special - DB HD: Dual Bead Heavy Duty

Performance



High Load Capacity



Durability



Bias



TR 390 IND



TR 390 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		2.80	6300
28L - 20	TL	20	172 A6	DB HD	714	1560	690	4545	DW 25 B	DW 23 B	30	2.80	6300	

DB HD: Dual Bead Heavy Duty

Performance



Cut and Chip



Durability



Heavy Duty





High Load Capacity



TR 391



TR 391 is an agro-industrial tire suitable for transport and compacting operations with sugar cane trailers and compactors. TR 391 features high load capacity and a longer service life.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
14.9 - 24	TL	6	123 A6	STD	405	1255	563	3639	DW 13	DW 11; DW 13 L; DW 12		30	1.40	1550
14.9 - 24	TL	8	128 A6	STD	405	1255	563	3639	DW 13	DW 11; DW 12; DW 13 L		30	1.80	1800

Performance

High Load Capacity

Durability

STD: Standard





EXCAVATOR



EM 934



EM 934 has been specially designed for excavators in road construction applications. It shows excellent lateral traction as well as outstanding self-cleaning features. The unique tread compound offers cut and chip resistance whereas the strong casing provides a long service life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.50
													
10.00 - 20	TT	16	146 B	STD	280	1060	500	3208	7.5	7.0; 8.0	50	3000	
10.00 - 20	TT	16	146 B	SPL	280	1060	500	3208	7.5	7.0; 8.0	50	3000	

Performance



STD: Standard - SPL: Special





EXCAVATOR



Bias

EM 936



EM 936 has been specially designed for excavators and telehandlers in digging and loading operations. Besides, one size is particularly suitable for graders and loaders in grading, loading and transport applications. EM 936 features outstanding riding comfort and enhanced self-cleaning properties. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions. Its "special" version is made of a special compound.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.50
10.00 - 20	TT	16	146 B	STD	275	1050	498	3180	7.5	7.0; 8.0	50	3000	
10.00 - 20	TT	16	146 B	SPL	275	1050	498	3180	7.5	7.0; 8.0	50	3000	
11.00 - 20	TT	16	149 B	STD	295	1090	508	3302	8.0	7.5; 8.5	50	3250	
12.5 - 20	TT	12	-	STD	330	1035	464	3210	11.0	-	50	3350	
											40 FR	2300	
											40 DW	2300	
16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	STD	405	1090	480	3295	13 SDC	13	50	3250	
											10	5300	
											10	5300	
16.0/70 - 20 (400/70-20)	TT	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	50	3250	
											10	5300	
											10	5300	
16.0/70 - 20 (400/70-20)	TL	14	149 B/166 A2	SPL	405	1090	480	3295	13 SDC	13	50	3250	
											10	5300	
											10	5300	

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction

STD: Standard - SPL: Special



Ø 20"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)					
										Rec.	Alt.						
										km/h / bar			4.00	5.00			
16.0/70 - 20 (400/70-20)	TL	16	152 B/168 A2	SPL	405	1090	480	3295	13 SDC	13	km/h / bar			3550	-	5600	
											50	-	-				
											10	-	-				
8.25 - 20	TT	14	133 B	STD	235	980	467	2970	6.5	6.0 ; 7.0	km/h / bar			6.75			
											50			2060			
											10			-			
9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5 ; 7.5	km/h / bar			7.00			
											50			2500			
											10			-			
9.00 - 20	TT	14	140 B	SPL	256	1012	481	3070	7.0	6.5 ; 7.5	km/h / bar			7.00			
											50			2500			
											10			-			
Ø 24"	16.0/70 - 24 (405/70-24)	TL	10	143 B/162 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	km/h / bar			2.50	3.20	-
												50			2725	-	4750
												10			-	-	-
16.0/70 - 24 (405/70-24)	TL	14	152 B/169 A2	STD	410	1190	575	3600	13 SDC	13 (DC)	km/h / bar			3.50	4.50	-	
											50			3550	-	5800	
											10			-	-	-	
20 - 24 (22/70-24)	TL	12	158 B/173 A2	STD	535	1390	665	4205	16.00 T SDC	-	km/h / bar			2.50	3.00	-	
											50			4250	-	6500	
											10			-	-	-	
Ø 25"	17.5 - 25	TL	24	-	DB	450	1340	600	4060	14.00/1.5	-	km/h / bar			7.00		
												10			10000		
												-			-		

STD: Standard - SPL: Special - DB: Dual Bead

Performance



Comfort



Handling & Comfort



Heavy Duty



Self-Cleaning



Traction



EXCAVATOR



EM 936 SUPER



EM 936 SUPER has been specifically designed for excavators and telehandlers in digging and loading operations as well as transport applications. With increased tread width by 8-10%, EM 936 SUPER offers outstanding stability and enhanced riding comfort. It also ensures a high level of handling comfort and provides excellent traction even under heavy-duty service conditions.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	kg
10.00 - 20	TT	14	145 B	STD	277	1080	500	3336	7.5	7.0; 8.0	6.50	2900	
											50	2900	
10.00 - 20	TT	16	146 B	STD	277	1080	500	3336	7.5	7.0; 8.0	7.50	3000	
											50	3000	

STD: Standard

Performance



Comfort



Heavy Duty



Stability



Traction






EXCAVATOR

 Bias

EM 938



EM 938 has been specially designed for excavators in road construction works. The tire is made of a special tread compound, which is particular resistant to cuts and snags, whilst the aggressive tread pattern provides excellent traction. EM 938 features outstanding self-cleaning properties. The strong casing provides extraordinary resistance to impacts and shocks even in heavy-duty operations.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.00
													
9.00 - 20	TT	14	140 B	STD	256	1012	481	3070	7.0	6.5 ; 7.5	50	2500	
9.00 - 20	TT	16	-	STD	256	1012	481	3070	7.0	6.5 ; 7.5	50	2650	

STD: Standard

Performance



Handling & Comfort



Heavy Duty



Self-Cleaning





Traction



EM 939



EM 939 has been specially designed for excavators in road construction applications. It has a deeper tread and more lugs ensuring an extended tire life-cycle. The special lug design provides excellent traction during on/off road operations. The tire shows best lateral traction as well as outstanding self-cleaning features. The unique tread compound offers cut and chip resistance whereas the strong casing provides a long service life.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	8.50
													
10.00-20	TT	18	-	STD	280	1075	-	-	7.5	7.0; 8.0	50	3250	
9.00-20	TT	16	-	STD	260	1025	-	-	7.0	6.5; 7.5	km/h / bar	7.75	
											50	2650	

STD: Standard





EXCAVATOR

Bias

TR 678



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 34"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
600/65 - 34	TL	16	166 A2 / 162 A6	SB	610	1644	758	4916	DW 20 B	-		30	2.60
												10	4750
													5300
600/65 - 34	TL	20	170 A2 / 166 A6	SB	610	1644	758	4916	DW 20 B	-		30	3.20
												10	5300
													6000
600/65 - 34	TL	14	164 A2 / 160 A6	SB	610	1644	758	4916	DW 20 B	-		30	2.40
												10	4500
													5000
700/55 - 34	TL	14	168 A2 / 163 A6	SB	700	1640	757	4890	DW 24 B	-		30	2.40
												10	4875
													5600
700/55 - 34	TL	20	173 A2 / 168 A6	SB	700	1640	757	4890	DW 24 B	-		30	3.20
												10	5600
													6500

Performance



SB: Steel belted





EXCAVATOR



TR 678 IND



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
600/40 - 22.5	TL	-	169A8	DB	615	1085	483	3264	AG 20.00	-	40	6.00	5800

DB: Dual Bead



Performance



MP 570



MP 570 is an agro-industrial tire, which is suitable for excavators and backhoe loaders. This tire provides good traction and durability, as well as excellent self-cleaning properties in all operating conditions.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
Ø 18"	12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	3.50	
												80	2030
												50	2180
	12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	3.00	
												80	1930
												50	2000
Ø 20"	12.5 - 20	TL	10	-	STD	335	1050	480	3130	11	12 SDC	3.00	
												80	1850
												50	2065
	12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	3.50	
												80	2060
												50	2300
	14.5 - 20	TL	12	-	STD	360	1116	505	3325	11	12 SDC	3.00	
												65	2430
												50	2500

Performance

Durability

Self-Cleaning

Traction

STD: Standard



GRADER





GRADER

Radial

EARTHMAX SR 22



EARTHMAX SR 22 (G-2/L-2) is an All Steel radial tire specially designed for motor graders and loaders operating in extreme winter conditions on ice or snow. Operators will appreciate both excellent traction and stability provided by the large and non-directional tread design. Special tread compound suitable for cold climate. The full depth sipes on tread blocks give maximum traction on snow.

EARTHMAX
RADIAL OTR TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)												
										Rec.	Alt.	km/h / bar	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50		
14.00 R 24	TL	*	153 A8/175 A2	CR	366	1370	625	4141	8.00 TG	9.00 GR, 10.00 VA	40	2240	2430	2650	2800	3000	3250	3350	3650	-	-			
											10	-	-	-	-	-	-	-	-	-	6700	6900		
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00
15.5 R 25	TL	*	146 A8/169 A2	CR	385	1275	557	3841	12.00/1.3	-	40	1550	1750	2000	2180	2360	2575	2800	3000	-	-	-	-	-
											10	-	-	-	-	-	-	-	-	5000	5150	5450	5600	5800
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00
17.5 R 25	TL	*	153 A8/176 A2	CR	452	1350	590	3950	14.00/1.5	14.00/1.3 DC	40	1850	2120	2360	2650	2900	3075	3350	3650	-	-	-	-	-
											10	-	-	-	-	-	-	-	-	6000	6150	6500	6700	7100
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00
17.5 R 25	TL	**	167 B/182 A2	CR	452	1350	590	3950	14.00/1.5	14.00/1.3 (DC)	40	4375	4625	4750	5000	5150	5450	-	-	-	-	-		
											10	-	-	-	-	-	-	7300	7500	7750	8000	8250	8500	
											km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50		
20.5 R 25	TL	**	177 B/193 A2	CR	525	1490	640	4315	17.00/2.0	17.00/2.0 IF ; 17.00/1.7	40	5800	6150	6500	6700	6900	7300	-	-	-	-	-		
											10	-	-	-	-	-	-	9750	10000	10300	10900	11200	11500	
											km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50		
20.5 R 25	TL	*	161 A8/186 A2	CR	525	1490	640	4315	17.00/2.0	17.00/2.0 IF ; 17.00/1.7	40	2430	2800	3150	3450	3875	4125	4375	4625	-	-	-	-	
											10	-	-	-	-	-	-	-	8000	8250	8750	9000	9500	
											km/h / bar	1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	4.00	4.25	4.50	4.75	5.00
23.5 R 25	TL	*	170 A8/195 A2	CR	610	1614	709	4863	19.50/2.5	-	40	3150	3550	4000	4500	4875	5300	5600	6000	-	-	-	-	
											10	-	-	-	-	-	-	-	-	10300	10600	11200	11500	12150
											km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50		
23.5 R 25	TL	**	185 B/201 A2	CR	610	1614	709	4863	19.50/2.5	-	40	7500	7750	8250	8500	9000	9250	-	-	-	-	-		
											10	-	-	-	-	-	-	12500	12850	13200	13600	14000	14500	
											km/h / bar	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	6.25	6.50		

CR: Cut Resistant Compound

Technologies



All Steel



Ice and Snow

Performance



Stability



Traction



EARTHMAX SR 25 PLUS



EARTHMAX SR 25 PLUS (G-2/L-2) is an All Steel radial tire, which has been specially designed for motor graders and loaders operating in the most severe road construction or mining applications. Its non-directional tread design offers excellent self-cleaning properties in addition to traction and stability off the road.



Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	5.25	5.50
14.00 R 24	TL	*	153 A8/175 A2	CR	359	1372	626	4146	8.00TG	9.00GR		40	2240	2430	2650	2800	3000	3250	3350	3650	-	-
												10	-	-	-	-	-	-	-	-	6700	6900

Technologies



CR: Cut Resistant Compound

Performance





SKID STEER





GIANT TRAX



GIANT TRAX has been designed for skid steer loaders in scrap yard operations, on rough concrete surfaces, recycling applications and mines. The extra deep tread with wider and sturdier blocks provides best traction, stability, and puncture resistance. The special tread compound results in exceptional cut and chip resistance along with excellent wear resistance on all types of terrains.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
10 - 16.5	TL	12	-	-	STD	270	775	362	2317	8.25	-		6.20	
													10	2375
													15	1875
10 - 16.5	TL	12	123A8	-	IMP	270	775	362	2317	8.25	-		6.20	
													40	1550
12 - 16.5	TL	14	-	-	STD	315	840	398	2521	9.75	-		6.20	
													10	3075
													15	2430
12 - 16.5	TL	14	-	-	STD	315	840	398	2521	9.75	-		6.20	
													25	2245
Ø 17.5"	14 - 17.5	TL	14	155A2	STD	350	915	-	-	10.50	-		5.50	
													10	3875
													15	3060
													25	2830

Performance



STD: Standard - IMP: Implement



MUD POWER HD



MUD POWER HD has been specifically engineered for skid steers. Its deep tread design along with the special lug pattern provides excellent traction on wet and soft soil. MUD POWER HD is made of a special industrial compound and features a strong nylon casing resulting in an extended tire life-cycle even under severe conditions.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
10 - 16.5	TL	10	-	-	STD	268	800	-	-	8.25	-	5.20	2135
												10	1685
												15	1560
												25	
12 - 16.5	TL	10	-	-	STD	315	850	391	2514	9.75	-	4.50	2540
												10	2005
												15	1855
												25	
Ø 17.5"	14-17.5	TL	14	155A2	STD	350	925	-	-	10.50	-	5.50	3875
												10	3060
												15	2830
												25	

Performance



Durability



Traction

STD: Standard





JUMBO TRAX HD



JUMBO TRAX HD is a block pattern tire for skid steers. It features cut and chip resistance and is particularly suitable for heavy-duty service. The deep tread along with excellent sidewall protection provides an extended tire life-cycle. JUMBO TRAX HD is also available in a "special" version.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
10 - 16.5	TL	10	-	STD	268	795	363	2345	8.25	-		5.20		
												10	2135	
												15	1685	
10 - 16.5	TL	10	120A8	IMP	268	795	363	2345	8.25	-		5.20		
												40	1400	
10 - 16.5	TL	10	-	SPL	268	795	363	2345	8.25	-		5.20		
												10	2135	
												15	1685	
12 - 16.5	TL	12	-	STD	325	855	387	2522	9.75	-		5.50		
												10	2865	
												15	2265	
12 - 16.5	TL	10	-	STD	325	855	387	2522	9.75	-		4.50		
												10	2540	
												15	2005	
												25	1855	

Performance



STD: Standard - IMP: Implement - SPL: Special



POWER TRAX HD (SS)



POWER TRAX HD premium tire is specially designed for equipment in port and underground mining applications. Its deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces. The specially designed rim guard ensures protection against flats and wheel damage in the rim flange area.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	10	-	STD	268	790	361	2331	8.25	-		5.20	
												10	2135
												15	1685
10 - 16.5	TL	10	120A8	IMP	268	790	361	2331	8.25	-		5.20	
												40	1400
12 - 16.5	TL	10	-	STD	324	865	391	2552	9.75	-		4.50	
												10	2540
												15	2005
12 - 16.5	TL	12	-	STD	324	865	391	2552	9.75	-		5.50	
												10	2865
												15	2265
12 - 16.5	TL	14	-	STD	324	865	391	2552	9.75	-		6.20	
												10	3075
												15	2430
												25	2245

Performance





STD: Standard - IMP: Implement

SKID POWER



SKID POWER has been designed for skid steers in construction applications. It shows excellent traction as well as enhanced self-cleaning features. The tire features an extra deep tread along with extra sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER is the ideal tire for loose surfaces.

Ø 14"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
Ø 14"	25 X 8.5 - 14	TL	6	-	STD	213	652	305	1912	7 JA	-		3.40	
													10	965
													15	765
Ø 16.5"	10 - 16.5	TL	8	-	STD	254	775	355	2286	8.25	-		4.10	
													10	1880
													15	1485
Ø 16.5"	10 - 16.5	TL	10	-	STD	254	775	355	2286	8.25	-		5.20	
													10	2135
													15	1685
Ø 16.5"	10 - 16.5	TL	8	116A8	IMP	254	775	355	2286	8.25	-		4.10	
													40	1250
Ø 16.5"	12 - 16.5	TL	10	-	STD	305	821	373	2422	9.75	-		4.50	
													10	2540
													15	2005
Ø 16.5"	12 - 16.5	TL	10	125A8	IMP	305	821	373	2422	9.75	-		4.50	
													40	1650

Performance



STD: Standard - IMP: Implement - SPL: Special



Ø 17.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14 - 17.5	TL	14	-	STD	355	940	424	2773	10.5	-	10	3875	
											15	3060	
											25	2830	
14 - 17.5	TL	14	141 A8	IMP	355	940	424	2773	10.5	-	5.50	5.50	
											40	2575	

STD: Standard - IMP: Implement

Performance





SKID POWER (CHEVRON)



SKID POWER (CHEVRON) has been specially designed for skid steers in construction applications. It features excellent traction as well as enhanced self-cleaning properties. SKID POWER (CHEVRON) is particularly suitable for loose surfaces and shows high cut and chip resistance.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	kg
7.00 - 15	TL	6	-	-	STD	203	762	347	2295	5.50 F	6 LB	4.10	1440
												10	1140
7.00 - 15	TL	6	106A8	-	IMP	203	762	347	2295	5.50 F	6 LB	4.10	950
												40	950

STD: Standard - IMP: Implement

Performance



Cut and Chip Resistance



Self-Cleaning





SKID POWER HD



SKID POWER HD has been designed for skid steers in construction applications. The tire features an extra deep tread and sidewall protection providing excellent cut and chip resistance and outstanding durability. SKID POWER HD is the ideal tire for loose surfaces and heavy-duty service.

Ø 8"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	3.00
												10	15
Ø 8"	18 X 8.5 - 8	TL	8	-	STD	210	460	207	1357	7.00 I - 55; I - 70; I - 90	-	10	740
												15	585
												25	540
Ø 10"	18 X 8.5 - 10	TL	8	-	STD	205	465	213	1372	7.00 I - 55; I - 70; I - 90	-	10	720
												15	570
												25	525
	18 X 8.5 - 10	TL	8	82A8	IMP	205	465	213	1372	7.00 I - 55; I - 70; I - 90	-	40	475
												3.00	
												40	475
Ø 12"	23 X 8.5 - 12	TL	6	87A8	IMP	215	585	267	1795	7.00 I - 55	7.00 I - 70; 7 JA	40	545
												3.40	
	23 X 8.5 - 12	TL	12	98A8	IMP	215	585	267	1795	7.00 I - 55	7.00 I - 70; 7 JA	40	750
												6.20	
	23 X 8.50 - 12	TL	12	-	STD	215	585	267	1795	7.00 I - 55	7.00 I - 70; 7 JA	10	1150
												15	910
												25	840
	23 X 8.50 - 12	TL	6	-	STD	215	585	267	1795	7.00 I - 55	7.00 I - 70; 7 JA	10	820
												15	650
												25	600

Performance



STD: Standard - IMP: Implement



Ø 12"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
23 X 8.50 - 12	TL	8	-	STD	215	585	267	1795	7.00 I - 55	7.00 I - 70; 7 JA		4.40		
												10	940	
												15	745	
												25	685	
26 X 12 - 12	TL	12	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA		5.40		
												10	1800	
												15	1420	
												25	1315	
26 X 12 - 12	TL	8	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA		3.40		
												10	1370	
												15	1080	
												25	1000	
26 X 12 - 12	TL	10	-	STD	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA		4.40		
												10	1595	
												15	1260	
												25	1165	
26 X 12 - 12	TL	12	114A8	IMP	305	660	297	1947	10.50 I - 55	8.50 I - 55; 10.50 I - 70; 8½ JA; 9½ JA; 10½ JA		5.40		
												40	1180	
27 X 10 - 12 (250/75 - 12)	TT	14	-	IND	255	700	-	-	8.00 G	-		6.90		
												25	2725	

STD: Standard - IMP: Implement - IND: Industrial

Performance



Traction



Cut and Chip Resistance



Self-Cleaning



Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
27 X 10.5 - 15	TL	8	-	STD	256	684	316	2020	8 LB	-		4.20		
												10	1405	
												15	1110	
												25	1025	
27 X 10.5 - 15	TL	8	105 A8	IMP	256	684	316	2020	8 LB	-		4.20		
												40	925	
27 X 10.5 - 15	TL	8	108 A6	TRTR	256	684	316	2020	8 LB	-		4.20		
												30	1000	
27 X 8.5 - 15	TL	8	102 A8	IMP	218	676	313	1995	7 JA	-		4.20		
												40	850	
27 X 8.50 - 15	TL	8	-	STD	218	676	313	1995	7 JA	-		4.20		
												10	1310	
												15	1035	
												25	955	
31 X 15.5 - 15	TL	8	-	STD	400	790	360	2330	13 LB	-		3.10		
												15	1655	
												50	1255	
31 X 15.5 - 15	TL	10	125 A8	IMP	400	790	360	2330	13 LB	-		4.20		
												40	1650	
31 X 15.5 - 15	TL	10	139 A2/121 B	STD	400	790	360	2140	13 LB	-		4.20		
												10	2450	
												15	1960	
												50	1450	
Ø 16.5"	10 - 16.5	TL	10	-	STD	267	780	362	2350	8.25	-		5.20	
													10	2135
													15	1685
													25	1560
10 - 16.5	TL	8	-	STD	267	780	362	2350	8.25	-		4.10		
												10	1880	
												15	1485	
												25	1370	

Performance



Traction



Cut and Chip Resistance



Self-Cleaning

STD: Standard - IMP: Implement - TRTR: Tractor Trailer



Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	10 - 16.5	TL	8	116A8	IMP	267	780	362	2350	8.25	-		4.10	
	12 - 16.5	TL	10	-	STD	324	850	385	2508	9.75	-		4.50	
10													2540	
15													2005	
25													1855	
	12 - 16.5	TL	12	-	STD	324	850	385	2508	9.75	-		5.50	
10													2865	
15													2265	
25													2090	
	12 - 16.5	TL	10	125A8	IMP	324	850	385	2508	9.75	-		4.50	
	12 - 16.5	TL	12	130A8	IMP	324	850	385	2508	9.75	-		5.50	
	260/70 - 16.5 (10 - 16.5)	TL	10	120A8	IMP	267	775	355	2295	8.25	-		5.20	
	31.5 X 13 - 16.5	TL	10	-	STD	330	795	363	2345	9.75	-		4.80	
10													2435	
15													1925	
25													1780	
	31.5X13-16.5	TL	10	124A8	IMP	330	795	363	2345	9.75	-		4.80	
	33 X 15.5 - 16.5	TL	12	148A2	STD	394	838	380	2583	13.00	-		4.10	
10													3150	
15													2490	
25													2300	
	33 X 15.5 - 16.5	TL	12	131A8	IMP	394	838	380	2583	13.00	-		4.10	
	33 X 15.5 - 16.5	TL	14	151A2	STD	394	838	380	2583	13.00	-		4.80	
10													3450	
15													2725	
25													2520	

Performance



Traction




Cut and Chip Resistance



Self-Cleaning

STD: Standard - IMP: Implement



Ø 17.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
14 - 17.5	TL	14	-	STD	350	930	420	2744	10.50	-		5.50		
												10	3875	
												15	3060	
14 - 17.5	TL	14	140A8	IMP	350	930	420	2744	10.50	-		5.50		
												40	2500	
Ø 19.5"	15 - 19.5	TL	14	-	STD	400	1019	463	3090	11.75	12.25		4.85	
													10	4565
													15	3605
													25	3330
15 - 19.5	TL	14	146A8	IMP	400	1019	463	3090	11.75	12.25		4.85		
												40	3000	

Performance



Traction



Cut and Chip Resistance



Self-Cleaning

STD: Standard - IMP: Implement





Bias

SKID POWER SK



SKID POWER SK has been specially designed for skid steers in construction applications. Its sidewall and rim guard protectors as well as its deep tread provide an extended tire life-cycle.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	12	138A2	STD	270	775	355	2286	8.25	-	10	6.20	
											15	2375	
											25	1875	
10 - 16.5	TL	8	116A8	IMP	270	775	355	2286	8.25	-	40	4.10	
												1250	
10 - 16.5	TL	10	-	STD	270	775	355	2286	8.25	-	10	5.20	
											15	2135	
											25	1685	
10 - 16.5	TL	8	-	STD	270	775	355	2286	8.25	-	10	4.10	
											15	1880	
											25	1485	
10 - 16.5	TL	10	120A8	IMP	270	775	355	2286	8.25	-	40	5.20	
												1400	
12 - 16.5	TL	12	-	STD	312	825	375	2434	9.75	-	10	5.50	
											15	2865	
											25	2265	
12 - 16.5	TL	10	-	STD	312	825	375	2434	9.75	-	10	4.50	
											15	2540	
											25	2005	
12 - 16.5	TL	12	130A8	IMP	312	825	375	2434	9.75	-	40	5.50	
												1900	
12 - 16.5	TL	10	125A8	IMP	312	825	375	2434	9.75	-	40	4.50	
												1650	

Performance



Durability



STD: Standard - IMP: Implement





SKID POWER PLUS



SKID POWER PLUS has been designed for skid steers in construction applications. Its wider lugs provide excellent traction as well as enhanced self-cleaning properties. The tire features an extra deep tread along with enhanced sidewall protection providing excellent cut-and-chip resistance and outstanding durability. SKID POWER PLUS is the ideal tire for loose surfaces. The wide contact area provides excellent stability during operations.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
10 - 16.5	TL	10	-	-	STD	252	775	-	-	8.25	-	5.20	2135
												10	1685
												15	1560
10 - 16.5	TL	8	-	-	STD	252	775	-	-	8.25	-	4.10	1880
												10	1485
												15	1370
10 - 16.5	TL	10	-	-	SPL	252	775	-	-	8.25	-	5.20	2135
												10	1685
												15	1560

Performance




STD: Standard - SPL: Special



SNOW RIDE (A)



SNOW-RIDE is particularly suitable for municipality and maintenance applications in winter conditions with compact loaders and skid steers. It features excellent traction and is ideal for ice and snow operations. Its specially designed tread pattern eliminates slippage risks and ensures a longer tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
12.5/70 - 16	TL	6	-	-	STD	315	850	385	2550	10 LB	-	2.00	
												10	1410
12.5/70 - 16	TL	10	-	-	STD	315	850	385	2550	10 LB	-	3.20	
												10	1855
Ø 16.5"	10 - 16.5	TL	10	-	STD	270	780	357	2340	8.25	-	5.20	
												10	2135
	10 - 16.5	TL	6	-	STD	270	780	357	2340	8.25	-	3.10	
												10	1590
	12 - 16.5	TL	6	-	STD	305	835	379	2505	9.75	-	2.80	
												10	1915
	12 - 16.5	TL	10	-	STD	305	835	379	2505	9.75	-	4.50	
												10	2540
Ø 18"	15.5/60 - 18	TL	10	-	STD	395	938	425	2814	W 13	-	2.60	
												10	2400
Ø 20"	17.5/65 - 20	TL	10	-	STD	445	1095	493	3285	W 14 L	-	2.40	
												10	3195

STD: Standard

Technology



Snow Pattern

Performance



Traction



Durability



SURE TRAX HD



SURE TRAX HD is a block pattern tire for skid steers in construction applications. It shows excellent cut and chip resistance as well as top rim protection. SURE TRAX HD is ideal for paved surfaces and heavy-duty service.

Ø 16.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
10 - 16.5	TL	10	-	-	STD	268	785	359	2316	8.25	-	5.20	
												10	2135
												15	1685
12 - 16.5	TL	12	-	-	STD	325	855	387	2522	9.75	-	5.50	
												10	2865
												15	2265
12 - 16.5	TL	12	130A8	-	IMP	325	855	387	2522	9.75	-	5.50	
												40	1900

Performance



STD: Standard - IMP: Implement



TELEHANDLER



MULTIMAX MP 522



MULTIMAX MP 522 is the BKT multi-purpose tire developed for agro-industrial applications. It is suitable for all lifting and loading operations on vehicles such as telehandlers and compact loaders. Stability and traction are its strengths as well as outstanding puncture resistance. Thanks to its special compound, MULTIMAX MP 522 has an incredible cut and chip resistance.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Performance	Load capacity (kg/tire)									
										Rec.	Alt.		km/h / bar									
										1.6	2.0		2.4	2.8	3.2	3.5	4.0	4.2	4.4			
280/80 R 18 IND	TL	-	132 A8/B	STD	282	907	421	2748	W 9; 9; 9 SDC	W 8; W 10	Cut and Chip Resistance	50	960	1140	1300	1480	1660	1780	2000	-	-	
												40	960	1140	1300	1480	1660	1780	2000	-	-	
												30	1030	1220	1395	1585	1780	1905	2140	-	-	
												25	1070	1270	1445	1645	1845	1980	2220	-	-	
												10 Cyc.	1170	1440	1695	1950	2220	2415	2730	2880	3000	
												Static	1795	2210	2600	2990	3405	3705	4190	4420	4600	
340/80 R 18 IND (12.5/80 R 18)	TL	-	143 A8/B	STD	343	1001	458	3023	11; 11 SDC; W 11	W 10; 12; 12 SDC	High Puncture Resistance	50	1310	1555	1775	2020	2265	2430	2725	-	-	
												40	1310	1555	1775	2020	2265	2430	2725	-	-	
												30	1405	1665	1900	2165	2425	2600	2920	-	-	
												25	1455	1725	1970	2240	2515	2695	3025	-	-	
												10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
												Static	2450	3010	3545	4080	4640	5050	5710	6020	6270	
Ø 20"	340/80 R 20 IND	TL	14	144 A8/B	STD	343	1052	481	3212	11	W 10; 11 SDC; W 11; 12; 12 SDC	Stability	50	1345	1600	1820	2075	2325	2495	2800	-	-
													40	1345	1600	1820	2075	2325	2495	2800	-	-
													30	1440	1710	1950	2220	2490	2670	3000	-	-
													25	1495	1775	2025	2305	2585	2770	3110	-	-
													10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
													Static	2515	3095	3640	4190	4770	5185	5865	6185	6440
380/75 R 20 IND (14.5 R 20)	TL	14	148 A8/B	STD	384	1074	483	3251	W 12	W 11; 11; 12	Traction	50	1500	1770	2040	2305	2575	2860	3005	3150	-	-
												40	1500	1770	2040	2305	2575	2860	3005	3150	-	-
												30	1610	1900	2195	2490	2780	3075	3220	3370	-	-
												25	1670	1975	2280	2585	2890	3195	3350	3500	-	-
												10 Cyc.	1850	2260	2670	3080	3490	3900	4110	4315	4520	4730
												Static	2840	3470	4100	4730	5360	5990	6305	6620	6935	7250

STD: Standard

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)													
										Rec.	Alt.														
												km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4				
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	476	3222	13	12 SDC; 13 SDC; 14	50	1560	1855	2115	2405	2700	2895	3250	-	-					
											40	1560	1855	2115	2405	2700	2895	3250	-	-					
											30	1675	1985	2265	2580	2890	3100	3480	-	-					
											25	1735	2060	2350	2675	3000	3215	3610	-	-					
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875					
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475					
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	533	3527	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L	50	1705	2025	2310	2630	2950	3160	3550	-	-					
											40	1705	2025	2310	2630	2950	3160	3550	-	-					
											30	1825	2170	2470	2815	3155	3385	3800	-	-					
											25	1895	2250	2565	2920	3275	3515	3945	-	-					
											10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
											Static	3185	3920	4615	5310	6045	6575	7435	7840	8165					
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	553	3778	DW 13	DW 12; DW 13 L; DW 14 L	50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
											30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
											25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
											10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
											Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	586	3958	DW 14 L	DW 13; DW 13 L; DW 15 L	50	2220	2640	3010	3425	3840	4120	4625	-	-					
											40	2220	2640	3010	3425	3840	4120	4625	-	-					
											30	2380	2825	3220	3665	4110	4410	4950	-	-					
											25	2465	2930	3340	3800	4265	4575	5135	-	-					
											10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
											Static	4150	5110	6015	6920	7875	8570	9685	10215	10640					
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1250	568	3766	DW 15 L	DW 14 L; DW 16 L	50	2100	2495	2845	3240	3635	3895	4375	-	-					
											40	2100	2495	2845	3240	3635	3895	4375	-	-					
											30	2250	2675	3050	3470	3890	4170	4685	-	-					
											25	2335	2775	3160	3600	4035	4330	4860	-	-					
											10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
											Static	3930	4835	5690	6545	7450	8105	9160	9665	10065					

Performance



Cut and Chip Resistance



High Puncture Resistance



Stability



Traction

STD: Standard

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4	
500/70 R 24 IND (19.5L R 24)	TL	-	164 A8/B	STD	503	1310	595	3940	DW 16 L	DW 15 L; DW 18 L	50	2400	2850	3250	3700	4150	4450	5000	-	-		
											40	2400	2850	3250	3700	4150	4450	5000	-	-		
											30	2570	3050	3480	3960	4445	4765	5350	-	-		
											25	2665	3165	3610	4110	4610	4940	5550	-	-		
											10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500		
											Static	4485	5520	6500	7475	8510	9260	10465	11040	11500		
540/70 R 24 IND	TL	-	168 A8/B	STD	530	1366	611	4133	DW 16 L	DW 18 L	50	2690	3195	3640	4145	4650	4985	5600	-	-		
											40	2690	3195	3640	4145	4650	4985	5600	-	-		
											30	2880	3420	3900	4440	4980	5340	5995	-	-		
											25	2990	3550	4045	4605	5165	5540	6220	-	-		
											10 Cyc.	3280	4035	4750	5460	6220	6765	7645	8065	8400		
											Static	5025	6185	7280	8375	9535	10370	11725	12365	12880		
Ø 26"	480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	638	4287	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-
												40	2610	3060	3330	3555	3780	4005	4275	4500	-	-
												30	2795	3275	3565	3805	4045	4290	4575	4815	-	-
												25	2900	3400	3700	3950	4200	4450	4750	4995	-	-
												10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750
												Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350
Ø 28"	440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	643	4278	DW 14 L	DW 13; DW 13 L; DW 15 L	50	2300	2725	2940	3150	3360	3575	3790	4000	-	-
												40	2300	2725	2940	3150	3360	3575	3790	4000	-	-
												30	2480	2930	3155	3380	3605	3830	4055	4280	-	-
												25	2570	3040	3270	3505	3740	3970	4205	4440	-	-
												10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000
												Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200

STD: Standard

Performance



Cut and Chip Resistance



High Puncture Resistance



Stability



Traction



TELEHANDLER

Radial

MULTIMAX MP 527



MULTIMAX MP 527 is a multi-purpose radial tire designed for telehandlers and compact loaders in agro-industrial applications. The tire shows a block pattern design providing excellent traction even on the harder surfaces. The strong sidewall ensures outstanding stability in lift mode. MULTIMAX MP 527 is made of a special cut-and-chip-resistant compound providing and a long service life.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
340/80 R 18 IND	TL	-	143 A8/B	STD	343	1001	455	2944	11; 11 SDC; W 11	W 10; 12; 12 SDC	50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
											Static	2450	3010	3545	4080	4640	5050	5710	6020	6270	
360/70 R 18 IND	TL	-	142 A8/B	STD	360	969	439	2887	11	W 10; 11 SDC; W11; 12; 12 SDC	50	1275	1515	1725	1965	2200	2360	2650	-	-	
											40	1275	1515	1725	1965	2200	2360	2650	-	-	
											30	1365	1620	1850	2105	2360	2530	2840	-	-	
											25	1415	1680	1915	2180	2445	2625	2945	-	-	
											10 Cyc.	1555	1910	2250	2585	2945	3200	3620	3820	3975	
											Static	2380	2930	3445	3965	4515	4910	5550	5855	6095	
Ø 20"	340/80 R 20 IND	TL	-	144 A8/B	STD	343	1052	483	3176	11	W 10; 11 SDC; W11; 12; 12 SDC	50	1345	1600	1820	2075	2325	2495	2800	-	-
												40	1345	1600	1820	2075	2325	2495	2800	-	-
												30	1440	1710	1950	2220	2490	2670	3000	-	-
												25	1495	1775	2025	2305	2585	2770	3110	-	-
												10 Cyc.	1640	2020	2375	2730	3110	3385	3825	4035	4200
												Static	2515	3095	3640	4190	4770	5185	5865	6185	6440
400/70 R 20 IND (16.0/70 R 20)	TL	-	149 A8/B	STD	404	1068	494	3282	13	12 SDC; 13 SDC; 14	50	1560	1855	2115	2405	2700	2895	3250	-	-	
											40	1560	1855	2115	2405	2700	2895	3250	-	-	
											30	1675	1985	2265	2580	2890	3100	3480	-	-	
											25	1735	2060	2350	2675	3000	3215	3610	-	-	
											10 Cyc.	1905	2340	2755	3170	3610	3925	4440	4680	4875	
											Static	2920	3590	4225	4860	5535	6020	6805	7180	7475	

STD: Standard

Performance
















Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)													
										Rec.	Alt.		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4				
400/70 R 24 IND	TL	-	152 A8/B	STD	404	1170	542	3597	13	DW 12; DW 13; DW 13 L; 13 SDC; DW 14 L		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
												50	1705	2025	2310	2630	2950	3160	3550	-	-					
												40	1705	2025	2310	2630	2950	3160	3550	-	-					
												30	1825	2170	2470	2815	3155	3385	3800	-	-					
												25	1895	2250	2565	2920	3275	3515	3945	-	-					
												10 Cyc.	2080	2560	3010	3465	3945	4290	4850	5115	5325					
Static	3185	3920	4615	5310	6045	6575	7435	7840	8165																	
400/80 R 24 IND	TL	-	162 A8/B	STD	404	1250	578	3834	DW 13	DW 12; DW 13 L; DW 14 L		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.4	3.6	4.0	4.4	4.6	4.8	5.0	5.2	5.4
												50	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
												40	1855	2185	2565	2900	3230	3350	3520	3895	4220	4435	4540	4750	-	-
												30	1985	2340	2750	3105	3460	3590	3770	4170	4515	4745	4860	5085	-	-
												25	2060	2430	2850	3220	3590	3725	3910	4330	4690	4925	5040	5275	-	-
												10 Cyc.	2280	2785	3280	3850	4350	4600	4845	5280	5845	6090	6330	6655	6810	7125
Static	3500	4270	5030	5900	6670	7050	7430	8100	8960	9340	9710	10205	10445	10925												
440/80 R 24 IND	TL	-	161 A8/B	STD	441	1314	601	3985	DW 14 L	DW 13; DW 13 L; DW 15 L		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
												50	2220	2640	3010	3425	3840	4120	4625	-	-					
												40	2220	2640	3010	3425	3840	4120	4625	-	-					
												30	2380	2825	3220	3665	4110	4410	4950	-	-					
												25	2465	2930	3340	3800	4265	4575	5135	-	-					
												10 Cyc.	2710	3335	3925	4515	5140	5590	6320	6665	6940					
Static	4150	5110	6015	6920	7875	8570	9685	10215	10640																	
460/70 R 24 IND (17.5L R 24)	TL	-	159 A8/B	STD	465	1254	574	3801	DW 15 L	DW 14 L; DW 16 L		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
												50	2100	2495	2845	3240	3635	3895	4375	-	-					
												40	2100	2495	2845	3240	3635	3895	4375	-	-					
												30	2250	2675	3050	3470	3890	4170	4685	-	-					
												25	2335	2775	3160	3600	4035	4330	4860	-	-					
												10 Cyc.	2565	3155	3710	4270	4860	5285	5975	6305	6565					
Static	3930	4835	5690	6545	7450	8105	9160	9665	10065																	
500/70 R 24 IND	TL	-	164 A8/B	STD	503	1310	597	4019	DW 16 L	DW 15 L; DW 18 L		km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4					
												50	2400	2850	3250	3700	4150	4450	5000	-	-					
												40	2400	2850	3250	3700	4150	4450	5000	-	-					
												30	2570	3050	3480	3960	4445	4765	5350	-	-					
												25	2665	3165	3610	4110	4610	4940	5550	-	-					
												10 Cyc.	2925	3600	4240	4875	5550	6040	6825	7200	7500					
Static	4485	5520	6500	7475	8510	9260	10465	11040	11500																	












STD: Standard

Performance



MULTIMAX MP 527

Ø 26"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)										
										Rec.	Alt.	km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
																						
480/80 R 26 IND	TL	-	160 A8/B	STD	479	1428	642	4259	DW 15 L	DW 16 L	50	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											40	2610	3060	3330	3555	3780	4005	4275	4500	-	-	
											30	2795	3275	3565	3805	4045	4290	4575	4815	-	-	
											25	2900	3400	3700	3950	4200	4450	4750	4995	-	-	
											10 Cyc.	3175	3915	4255	4590	4995	5335	5670	6075	6415	6750	
											Static	4865	6005	6525	7040	7660	8180	8695	9315	9835	10350	

Ø 28"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	DW 14 L	DW 13; DW 13 L; DW 15 L	Load capacity (kg/tire)										
												km/h / bar	1.6	2.0	2.2	2.4	2.6	2.8	3.0	3.2	3.4	3.6
																						
440/80 R 28 IND	TL	-	156 A8/B	STD	441	1415	648	4270	DW 14 L	DW 13; DW 13 L; DW 15 L	50	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											40	2300	2725	2940	3150	3360	3575	3790	4000	-	-	
											30	2480	2930	3155	3380	3605	3830	4055	4280	-	-	
											25	2570	3040	3270	3505	3740	3970	4205	4440	-	-	
											10 Cyc.	2840	3470	3790	4105	4420	4735	5050	5370	5685	6000	
											Static	4360	5330	5810	6295	6780	7265	7750	8230	8715	9200	

STD: Standard


Performance



MULTIMAX MP 529



MULTIMAX MP 529 is a steel belted multi-purpose radial tire designed for telehandlers in industrial applications. Its tread design has been specially developed for hard surfaces. The strong sidewall and the larger footprint area ensure outstanding stability in lift mode. MULTIMAX MP 529 also features a strong puncture-resistant casing and is made of a special cut-and-chip-resistant compound providing extraordinary durability and a long service life.

Ø 18"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.	km/h / bar	1.6	2.0	2.4	2.8	3.2	3.5	4.0	4.2	4.4
																					
340/80 R 18	TL	-	143A8/B	STD	343	1001	445	3007	11	W 10; 11 SDC; W 11; 12; 12 SDC	50	1310	1555	1775	2020	2265	2430	2725	-	-	
											40	1310	1555	1775	2020	2265	2430	2725	-	-	
											30	1405	1665	1900	2165	2425	2600	2920	-	-	
											25	1455	1725	1970	2240	2515	2695	3025	-	-	
											10 Cyc.	1600	1965	2315	2660	3030	3295	3725	3930	4090	
Static	2450	3010	3545	4080	4640	5050	5710	6020	6270												

STD: Standard


Performance



RT 747 AGRO INDUSTRIAL



RT 747 AGRO INDUSTRIAL is a radial agro-industrial tire suitable for compact loaders and telehandlers. Its extra wide lugs provide excellent traction and great stability in lifting operations. It has been designed with a special cut-and-chip resistance compound that enables the tire to carry heavy loads. RT 747 AGRO INDUSTRIAL is the right answer to all general farming operations that need outstanding versatility.

Ø 16"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
										Rec.	Alt.	km/h / bar	1.2	1.6	2.0	2.2	2.4	2.6	
												10	30	40	10 Cyc	Static			
11L R 16	TL	-	122 A8/B	STD	290	850	-	-	W 8	W 10 L	10	1265	1530	1790	1920	2055	2200		
											30	940	1165	1385	1500	1610	-		
											40	880	1085	1295	1395	1500	-		
Ø 24"	460/70 R 24	TL	-	152 A8/B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	km/h / bar	1.2	1.6	2.0	2.4	2.8	3.2	
												50	1670	2060	2415	2805	3160	3550	
												40	1670	2060	2415	2805	3160	3550	
												30	1785	2205	2585	3000	3380	3800	
												25	1850	2285	2680	3115	3505	3940	
												10 Cyc	2505	3090	3620	4205	4740	5325	
												Static	3505	4325	5070	5890	6635	7455	
460/70 R 24	TL	-	159A8/156B	STD	465	1254	556	3840	DW 15 L	DW 14 L; DW 16 L	km/h / bar	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0
											50	1535	1890	2245	2560	2915	3265	3505	4000
											40	1705	2100	2495	2845	3240	3630	3895	4375
											30	1775	2185	2595	2960	3370	3775	4050	4550
											25	1805	2225	2645	3015	3435	3850	4130	4640
											10 Cyc	2560	3150	3745	4270	4860	5445	5845	6565
											Static	3920	4830	5740	6545	7450	8350	8960	10065
500/70 R 24	TL	-	157 A8/154 B	STD	485	1320	585	3949	DW 16 L	DW 15 L; DW 18 L	km/h / bar	1.2	1.6	2.0	2.4	2.8	3.0		
											50	1765	2175	2550	2965	3340	3750		
											40	1940	2395	2805	3260	3670	4125		
											30	2075	2560	3000	3490	3930	4415		
											25	2155	2655	3115	3620	4075	4580		
											10 Cyc	2910	3590	4210	4890	5510	6190		
											Static	4075	5025	5890	6845	7710	8665		

Performance



STD: Standard



AS 504



AS 504 is an agro-industrial tire mainly designed for soil tillage, implement and material-handling operations. This tire, which features excellent self-cleaning properties and increased grip, is suitable for field trailers and telehandlers. AS 504 is available in several versions to meet specific end-user requirements: an "HD" version with a special cut-and-chip resistance compound, while the "special" version has a reinforced casing that ensures a longer tire life.

Ø 12"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
10.0/80 - 12	TL	-	109A8	121A8	STD	270	730	-	-	9.00	7.0	3.90		
												10 FR	2030	
												25 FR	1725	
												30 FR	1625	
												40 FR	1450	
												10 DW	1440	
												25 DW	1225	
												40 DW	1030	
11.0/65 - 12	TT	8	101A8	114A8	STD	273	700	321	2072	9.00	-	2.90		
												10 FR	1650	
												25 FR	1405	
												30 FR	1320	
												40 FR	1180	
												10 DW	1155	
												25 DW	980	
												30 DW	925	
11.0/65 - 12	TL	8	101A8	114A8	STD	273	700	321	2072	9.00	-	2.90		
												10 FR	1650	
												25 FR	1405	
												30 FR	1320	
												40 FR	1180	
												10 DW	1155	
												25 DW	980	
												30 DW	925	
40 DW	825													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 12"	Tire size	TYPE	PR	LI/SS	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
												Rec.	Alt.	km/h / bar	
26 X 12.00 - 12	TL	-	-	112 A6	-	-	STD	310	648	298	1932	10.50 AT	8.0 AT; 8.5 AT; 9.0 AT	3.0	
														30	1120
6.5/80 - 12	TT	4	-	72 A8	84 A8	STD	163	608	273	1851	5 J	5 JA	2.40		
													10 FR	700	
													25 FR	595	
													30 FR	560	
													40 FR	500	
													10 DW	495	
													25 DW	420	
													30 DW	400	
													40 DW	355	
6.5/80 - 12	TL	4	-	72 A8	84 A8	STD	163	608	273	1851	5 J	5 JA	2.40		
													10 FR	700	
													25 FR	595	
													30 FR	560	
													40 FR	500	
													10 DW	495	
													25 DW	420	
													30 DW	400	
													40 DW	355	
6.5/80 - 12	TT	6	-	80 A8	93 A8	STD	163	608	273	1851	5 J	5 JA	3.60		
													10 FR	910	
													25 FR	775	
													30 FR	730	
													40 FR	650	
													10 DW	630	
													25 DW	535	
													30 DW	505	
													40 DW	450	

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 12"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
6.5/80 - 12	TL	6	80 A8	93 A8	STD	163	608	273	1851	5 J	5 JA	3.60		
												10 FR	910	
												25 FR	775	
												30 FR	730	
												40 FR	650	
												10 DW	630	
												25 DW	535	
												40 DW	450	
6.5/80 - 12	TT	6	80 A8	93 A8	HD	163	608	273	1851	5 J	5 JA	3.60		
												10 FR	910	
												25 FR	775	
												30 FR	730	
												40 FR	650	
												10 DW	630	
												25 DW	535	
												40 DW	450	
7.00 - 12	TT	6	83 A8	95 A8	STD	187	683	300	2001	4.5	-	2.50		
												10 FR	965	
												25 FR	820	
												30 FR	775	
												40 FR	690	
												10 DW	680	
												25 DW	575	
												40 DW	485	

STD: Standard - HD: Heavy Duty

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 12"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
7.00 - 12	TT	4	75A8	88A8	STD	187	683	300	2001	4.5	-		1.70	
													10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													30 DW	430
40 DW	385													
7.00 - 12	TL	4	75A8	88A8	STD	187	683	300	2001	4.5	-		1.70	
													10 FR	785
													25 FR	665
													30 FR	625
													40 FR	560
													10 DW	540
													25 DW	460
													30 DW	430
40 DW	385													
7.00 - 12	TL	6	83A8	95A8	STD	187	683	300	2001	4.5	-		2.50	
													10 FR	965
													25 FR	820
													30 FR	775
													40 FR	690
													10 DW	680
													25 DW	575
													30 DW	545
40 DW	485													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 12"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
7.00 - 12	TL	8	88A8	100A8	AB	187	683	300	2001	4.5	-		3.30		
													10 FR	1120	
													25 FR	950	
													30 FR	895	
													40 FR	800	
													10 DW	785	
													25 DW	665	
													30 DW	625	
													40 DW	560	
7.00 - 12	TL	8	88A8	100A8	SPL	187	683	300	2001	4.5	-		3.30		
													10 FR	1120	
													25 FR	950	
													30 FR	895	
													40 FR	800	
													10 DW	785	
													25 DW	665	
													30 DW	625	
													40 DW	560	
Ø 15"	400/50 - 15	TL	-	109A8	121A8	STD	395	790	369	2387	13 LB	-		3.00	
														10 FR	2030
														25 FR	1725
														30 FR	1625
														40 FR	1450
														10 DW	1440
														25 DW	1225
														30 DW	1155
														40 DW	1030

STD: Standard - AB: Aramid Belted - SPL: Special

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
5.00 - 15	TT	6	75 A8	88 A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J		3.50		
													10 FR	785	
													25 FR	665	
													30 FR	625	
													40 FR	560	
													10 DW	540	
													25 DW	460	
													40 DW	385	
5.00 - 15	TL	6	75 A8	88 A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J		3.50		
													10 FR	785	
													25 FR	665	
													30 FR	625	
													40 FR	560	
													10 DW	540	
													25 DW	460	
													40 DW	385	
5.00 - 15	TT	4	67 A8	79 A8	STD	140	657	308	1957	3.50 D	3.00 D; 4.00 E; 4 J		2.30		
													10 FR	610	
													25 FR	520	
													30 FR	485	
													40 FR	435	
													10 DW	425	
													25 DW	365	
													40 DW	305	

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
7.5L - 15	TT	6	97A8	109A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K		3.10		
													10 FR	1440	
													25 FR	1225	
													30 FR	1155	
													40 FR	1030	
													10 DW	1020	
													25 DW	870	
													40 DW	730	
7.5L - 15	TT	8	100A8	113A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K		3.70		
													10 FR	1610	
													25 FR	1370	
													30 FR	1290	
													40 FR	1150	
													10 DW	1120	
													25 DW	950	
													40 DW	800	
7.5L - 15	TL	8	100A8	113A8	STD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K		3.70		
													10 FR	1610	
													25 FR	1370	
													30 FR	1290	
													40 FR	1150	
													10 DW	1120	
													25 DW	950	
													40 DW	800	

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
7.5L - 15	TL	8	100A8	113A8	AB HD	210	765	354	2280	6 LB	5 K; 5½ J; 5½ K		3.70		
													10 FR	1610	
													25 FR	1370	
													30 FR	1290	
													40 FR	1150	
													10 DW	1120	
													25 DW	950	
													30 DW	895	
													40 DW	800	
													3.70		
													10 FR	1610	
													25 FR	1370	
													30 FR	1290	
													40 FR	1150	
10 DW	1120														
25 DW	950														
30 DW	895														
40 DW	800														
10.0/75 - 15.3	TT	8	106A8	119A8	STD	264	780	345	2285	9.00	-		3.10		
													10 FR	1905	
													25 FR	1620	
													30 FR	1525	
													40 FR	1360	
													10 DW	1330	
													25 DW	1130	
													30 DW	1065	
													40 DW	950	

STD: Standard - AB: Aramid Belted - HD: Heavy Duty

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
10.0/75 - 15.3	TL	8	106 A8	119 A8	STD	264	780	345	2285	9.00	-		3.10	
													10 FR	1905
													25 FR	1620
													30 FR	1525
													40 FR	1360
													10 DW	1330
													25 DW	1130
													40 DW	950
10.0/75 - 15.3	TL	10	111 A8	123 A8	STD	264	780	345	2285	9.00	-		3.90	
													10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
													10 DW	1525
													25 DW	1295
													30 DW	1220
40 DW	1090													
10.0/75 - 15.3	TL	14	118 A8	130 A8	STD	264	780	345	2285	9.00	-		5.50	
													10 FR	2660
													25 FR	2260
													30 FR	2130
													40 FR	1900
													10 DW	1850
													25 DW	1570
													30 DW	1480
40 DW	1320													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
10.0/75 - 15.3	TT	18	122 A8	135 A8	STD	264	780	345	2285	9.00	-		7.10	
												10 FR	3050	
												25 FR	2595	
												30 FR	2440	
												40 FR	2180	
												10 DW	2170	
												25 DW	1845	
												40 DW	1550	
10.0/75 - 15.3	TL	18	122 A8	135 A8	STD	264	780	345	2285	9.00	-		7.10	
												10 FR	3050	
												25 FR	2595	
												30 FR	2440	
												40 FR	2180	
												10 DW	2170	
												25 DW	1845	
												40 DW	1550	
10.0/75 - 15.3	TL	8	106 A8	119 A8	IND	264	780	345	2285	9.00	-		3.10	
												10 FR	1905	
												25 FR	1620	
												30 FR	1525	
												40 FR	1360	
												10 DW	1330	
												25 DW	1130	
												40 DW	950	

STD: Standard - IND: Industrial

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.		
											km/h / bar			
11.5/80 - 15.3	TT	8	114A8	126A8	STD	290	867	380	2540	9.00	-	2.70		
												10 FR		2380
												25 FR		2025
												30 FR		1905
												40 FR		1700
												10 DW		1650
												25 DW		1405
												40 DW		1180
11.5/80 - 15.3	TL	8	114A8	126A8	STD	290	867	380	2540	9.00	-	2.70		
												10 FR		2380
												25 FR		2025
												30 FR		1905
												40 FR		1700
												10 DW		1650
												25 DW		1405
												40 DW		1180
11.5/80 - 15.3	TL	10	119A8	131A8	STD	290	867	380	2540	9.00	-	3.40		
												10 FR		2730
												25 FR		2320
												30 FR		2185
												40 FR		1950
												10 DW		1905
												25 DW		1620
												40 DW		1360

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
11.5/80 - 15.3	TT	12	123 A8	135 A8	STD	290	867	380	2540	9.00	-		4.10	
												10 FR	3050	
												25 FR	2595	
												30 FR	2440	
												40 FR	2180	
												10 DW	2170	
												25 DW	1845	
												40 DW	1550	
11.5/80 - 15.3	TL	12	123 A8	135 A8	STD	290	867	380	2540	9.00	-		4.10	
												10 FR	3050	
												25 FR	2595	
												30 FR	2440	
												40 FR	2180	
												10 DW	2170	
												25 DW	1845	
												40 DW	1550	
11.5/80 - 15.3	TT	14	126 A8	139 A8	STD	290	867	380	2540	9.00	-		4.80	
												10 FR	3400	
												25 FR	2890	
												30 FR	2720	
												40 FR	2430	
												10 DW	2380	
												25 DW	2025	
												40 DW	1700	

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
11.5/80 - 15.3	TL	14	126 A8	139 A8	STD	290	867	380	2540	9.00	-		4.80	
												10 FR	3400	
												25 FR	2890	
												30 FR	2720	
												40 FR	2430	
												10 DW	2380	
												25 DW	2025	
												40 DW	1700	
11.5/80 - 15.3	TL	12	123 A8	135 A8	SR	290	867	380	2540	9.00	-		4.10	
												10 FR	3050	
												25 FR	2595	
												30 FR	2440	
												40 FR	2180	
												10 DW	2170	
												25 DW	1845	
												40 DW	1550	
27 X 10 - 15.3	TT	8	95 A8	107 A8	STD	260	695	317	2071	9.00	-		3.10	
												10 FR	1365	
												25 FR	1160	
												30 FR	1090	
												40 FR	975	
												10 DW	965	
												25 DW	820	
												40 DW	690	

STD: Standard - SR: Stubble Resistant

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 15.3"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.		
											km/h / bar			
27 X 10 - 15.3	TL	8	95A8	107A8	STD	260	695	317	2071	9.00	-	3.10		
												10 FR	1365	
												25 FR	1160	
												30 FR	1090	
												40 FR	975	
												10 DW	965	
												25 DW	820	
												40 DW	690	
Ø 16"	270/75 - 16 (10.0/75 - 16)	TL	-	111A8	123A8	STD	250	810	-	-	9.00	-	3.90	
													10 FR	2170
													25 FR	1845
													30 FR	1735
													40 FR	1550
													10 DW	1525
													25 DW	1295
													30 DW	1220
40 DW	1090													
Ø 16"	4.00 - 16	TT	4	66A8	78A8	STD	110	628	-	-	3.00 D	2.50 C	2.80	
													10 FR	595
													25 FR	505
													30 FR	475
													40 FR	425
													10 DW	420
													25 DW	355
													30 DW	335
40 DW	300													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 16"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
6.00 - 16	TT	6	83A8	95A8	STD	164	735	343	2190	4.00 E	4.50 E; 4½ K	2.80		
												10 FR	965	
												25 FR	820	
												30 FR	775	
												40 FR	690	
												10 DW	680	
												25 DW	575	
												40 DW	485	
6.00 - 16	TT	6	83A8	95A8	HD	164	735	343	2190	4.00 E	4.50 E; 4½ K	2.80		
												10 FR	965	
												25 FR	820	
												30 FR	775	
												40 FR	690	
												10 DW	680	
												25 DW	575	
												40 DW	485	
6.00 - 16	TT	8	91A8	103A8	HD	164	735	343	2190	4.00 E	4.50 E; 4½ K	4.00		
												10 FR	1225	
												25 FR	1040	
												30 FR	980	
												40 FR	875	
												10 DW	860	
												25 DW	730	
												40 DW	615	

STD: Standard - HD: Heavy Duty

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 16"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
7.50 - 16	TL	8	99A8	112A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F		3.20		
													10 FR	1570	
													25 FR	1335	
													30 FR	1255	
													40 FR	1120	
													10 DW	1085	
													25 DW	920	
													40 DW	775	
7.50 - 16	TT	6	92A8	104A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F		2.30		
													10 FR	1260	
													25 FR	1070	
													30 FR	1010	
													40 FR	900	
													10 DW	880	
													25 DW	750	
													40 DW	630	
7.50 - 16	TT	8	99A8	112A8	STD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F		3.20		
													10 FR	1570	
													25 FR	1335	
													30 FR	1255	
													40 FR	1120	
													10 DW	1085	
													25 DW	920	
													40 DW	775	

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 16"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
7.50 - 16	TT	8	99A8	112A8	HD	209	803	372	2475	5.50 F	4.50 E; 5.00 F; 4.00 E; 5 K; 6 LB; 6.00 F		3.20		
													10 FR	1570	
													25 FR	1335	
													30 FR	1255	
													40 FR	1120	
													10 DW	1085	
													25 DW	920	
													30 DW	870	
													40 DW	775	
													4.40		
													10 FR	1905	
													25 FR	1620	
													30 FR	1525	
													40 FR	1360	
10 DW	1330														
25 DW	1130														
30 DW	1065														
40 DW	950														
Ø 17"	15.0/55 - 17	TL	10	122A8	134A8	STD	380	890	395	2608	13.00	13	2.60		
													10 FR	2970	
													25 FR	2525	
													30 FR	2375	
													40 FR	2120	
													10 DW	2100	
													25 DW	1785	
													30 DW	1680	
													40 DW	1500	

STD: Standard - HD: Heavy Duty

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 17"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
15.0/55 - 17	TL	14	128 A8	141 A8	STD	380	890	395	2608	13.00	13	3.60		
												10 FR	3605	
												25 FR	3065	
												30 FR	2885	
												40 FR	2575	
												10 DW	2520	
												25 DW	2140	
												40 DW	1800	
19.0/45 - 17	TL	14	131 A8	144 A8	STD	465	865	389	2578	16.00	-	2.80		
												10 FR	3920	
												25 FR	3330	
												30 FR	3135	
												40 FR	2800	
												10 DW	2730	
												25 DW	2320	
												30 DW	2185	
40 DW	1950													
19.0/45 - 17	TL	16	134 A8	147 A8	STD	465	865	389	2578	16.00	-	3.10		
												10 FR	4305	
												25 FR	3660	
												30 FR	3445	
												40 FR	3075	
												10 DW	2970	
												25 DW	2525	
												30 DW	2375	
40 DW	2120													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 17"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
420/55 - 17	TL	14	129A8	142A8	STD	430	910	407	2712	13.00	-		3.00		
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													40 DW	1850	
420/55 - 17	TL	16	133A8	145A8	STD	430	910	407	2712	13.00	-		3.50		
													10 FR	4060	
													25 FR	3450	
													30 FR	3250	
													40 FR	2900	
													10 DW	2885	
													25 DW	2450	
													40 DW	2060	
Ø 18"	10.5/80 - 18	TL	10	119A8	131A8	STD	274	907	405	2657	W 9	9;W 8		3.70	
														10 FR	2730
														25 FR	2320
														30 FR	2185
														40 FR	1950
														10 DW	1905
														25 DW	1620
														40 DW	1360

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 18"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
12.5/80 - 18	TL	12	129 A8	142 A8	STD	308	987	438	2892	W 9	9; 11	3.70		
												10 FR	3710	
												25 FR	3155	
												30 FR	2970	
												40 FR	2650	
												10 DW	2590	
												25 DW	2200	
												40 DW	1850	
12.5/80 - 18	TL	16	135 A8	148 A8	STD	308	987	438	2892	W 9	9; 11	4.90		
												10 FR	4410	
												25 FR	3750	
												30 FR	3530	
												40 FR	3150	
												10 DW	3050	
												25 DW	2595	
												30 DW	2440	
40 DW	2180													
12.5/80 - 18	TL	18	138 A8	150 A8	STD	308	987	438	2892	W 9	9; 11	5.50		
												10 FR	4690	
												25 FR	3985	
												30 FR	3750	
												40 FR	3350	
												10 DW	3305	
												25 DW	2810	
												30 DW	2645	
40 DW	2360													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 18"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
											Rec.	Alt.		km/h / bar	
12.5/80 - 18	TL	12	129 A8	142 A8	SPL	308	987	438	2892	W 9	9; 11		km/h / bar	3.70	
													10 FR	3710	
													25 FR	3155	
													30 FR	2970	
													40 FR	2650	
													10 DW	2590	
													25 DW	2200	
													40 DW	1850	
7.50 - 18	TT	6	94 A8	106 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F		km/h / bar	2.30	
													10 FR	1330	
													25 FR	1130	
													30 FR	1065	
													40 FR	950	
													10 DW	940	
													25 DW	795	
													30 DW	750	
40 DW	670														
7.50 - 18	TT	8	101 A8	114 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F		km/h / bar	3.10	
													10 FR	1650	
													25 FR	1405	
													30 FR	1320	
													40 FR	1180	
													10 DW	1155	
													25 DW	980	
													30 DW	925	
40 DW	825														

STD: Standard - SPL: Special

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 18"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
7.50 - 18	TT	12	111 A8	122 A8	STD	209	854	407	2649	5.50 F	4.50 E; 6.00 F; 5.00 F		5.10	
												10 FR	2100	
												25 FR	1785	
												30 FR	1680	
												40 FR	1500	
												10 DW	1525	
												25 DW	1295	
												40 DW	1090	
Ø 20"	16.0/70 - 20	TL	14	142 A8	154 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	km/h / bar	3.50
													10 FR	5250
													25 FR	4465
													30 FR	4200
													40 FR	3750
													10 DW	3710
													25 DW	3155
													30 DW	2970
40 DW	2650													
16.0/70 - 20	TL	16	144 A8	156 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	km/h / bar	4.00	
												10 FR	5600	
												25 FR	4760	
												30 FR	4480	
												40 FR	4000	
												10 DW	3920	
												25 DW	3330	
												30 DW	3135	
40 DW	2800													

STD: Standard

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 20"	Tire size	TYPE	PR	LI/SS	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
												Rec.	Alt.		
												km/h / bar			
16.0/70 - 20	TL	10	-	-	135 A8	147 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	2.50	
														10 FR	4305
														25 FR	3660
														30 FR	3445
														40 FR	3075
														10 DW	3050
														25 DW	2595
														40 DW	2180
16.0/70 - 20	TL	12	-	-	139 A8	151 A8	STD	408	1097	487	3214	13	12 SDC; 14; 13 SDC	3.00	
														10 FR	4830
														25 FR	4105
														30 FR	3865
														40 FR	3450
														10 DW	3400
														25 DW	2890
														40 DW	2430
400/70 - 20	TL	-	-	149A8	-	-	IND	408	1097	487	3214	13	12 SDC; 14; 13 SDC	4.00	
														10	4060
														25	3445
														30	3380
														40	3250
7.50 - 20	TT	8	-	-	103 A8	116 A8	STD	209	904	422	2695	5.50 F	4.50 E; 6.00 F; 5.00 F	3.20	
														10 FR	1750
														25 FR	1490
														30 FR	1400
														40 FR	1250
														10 DW	1225
														25 DW	1040
														40 DW	875

STD: Standard - IND: Industrial

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 24"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
15.5/80 - 24	TL	14	148 A8	160 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	3.50		
												10 FR	6300	
												25 FR	5355	
												30 FR	5040	
												40 FR	4500	
												10 DW	4410	
												25 DW	3750	
												40 DW	3150	
15.5/80 - 24	TL	16	151 A8	163 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	4.00		
												10 FR	6825	
												25 FR	5800	
												30 FR	5460	
												40 FR	4875	
												10 DW	4830	
												25 DW	4105	
												40 DW	3450	
15.5/80 - 24	TL	10	142 A8	154 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	2.50		
												10 FR	5250	
												25 FR	4465	
												30 FR	4200	
												40 FR	3750	
												10 DW	3710	
												25 DW	3155	
												40 DW	2650	

STD: Standard - IND: Industrial

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 24"	Tire size	TYPE	PR	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
											Rec.	Alt.	km/h / bar	
15.5/80 - 24	TL	12	145 A8	157 A8	STD	384	1262	566	3655	W 12	W 13; W 14 L	3.00		
												10 FR	5775	
												25 FR	4910	
												30 FR	4620	
												40 FR	4125	
												10 DW	4060	
												25 DW	3450	
												40 DW	2900	
15.5/80 - 24	TL	14	148 A8	160 A8	SPL	384	1262	566	3655	W 12	W 13; W 14 L	3.50		
												10 FR	6300	
												25 FR	5355	
												30 FR	5040	
												40 FR	4500	
												10 DW	4410	
												25 DW	3750	
												40 DW	3150	
16.5/85 - 24	TT	16	155 A8	168 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L	3.80		
												10 FR	7840	
												25 FR	6665	
												30 FR	6270	
												40 FR	5600	
												10 DW	5425	
												25 DW	4610	
												40 DW	3875	

STD: Standard - SPL: Special

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



Ø 24"	Tire size	TYPE	PR	LI/SS	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
												Rec.	Alt.		km/h / bar	
16.5/85 - 24	TL	16	-	155 A8	168 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L		3.80		
														10 FR	7840	
														25 FR	6665	
														30 FR	6270	
														40 FR	5600	
														10 DW	5425	
														25 DW	4610	
														30 DW	4340	
40 DW	3875															
16.5/85 - 24	TL	10	-	146 A8	158 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L		2.40		
														10 FR	5950	
														25 FR	5060	
														30 FR	4760	
														40 FR	4250	
														10 DW	4200	
														25 DW	3570	
														30 DW	3360	
40 DW	3000															
16.5/85 - 24	TL	12	-	151 A8	163 A8	STD	415	1325	591	3837	W 13	W 14 L; W 15 L		2.80		
														10 FR	6825	
														25 FR	5800	
														30 FR	5460	
														40 FR	4875	
														10 DW	4830	
														25 DW	4105	
														30 DW	3865	
40 DW	3450															
400/80 - 24	TL	-	156 A8	-	-	IND	394	1262	566	3655	W 13	W 12 L; W 14 L		3.80		
														10	5000	
														25	4240	
														30	4160	
														40	4000	
400/80 - 24	TL	-	162 A8	-	-	IND	394	1262	566	3655	W 13	W 12 L; W 14 L		5.00		
														10	5940	
														25	5035	
														30	4940	
														40	4750	

STD: Standard - IND: Industrial

Technology



Aramid Belted



Heavy Duty



Reinforced Carcass

Performance



Durability



Self-Cleaning



Traction



Stability



Cut and Chip Resistance



CON STAR




CON STAR is particularly suitable for compact loaders and telehandlers in agro-industrial, lifting and loading applications. It features great traction along with excellent vertical and horizontal stability. CON STAR has been made of a cut-and-chip-resistant compound contributing to an extended tire life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	4.00
Ø 18"	340/80 - 18 (12.5/80 - 18)	TL	-	143 A8	IND	350	1015	460	3075	11	12; 11 SDC; 12 SDC; W 10; W 11		40	2725
													40	4.00
Ø 20"	340/80 - 20 (12.5/80 - 20)	TL	-	144 A8	IND	350	1065	491	3272	11	12; 11 SDC; 12 SDC; W 10; W 11		40	2800
													40	4.00
	380/75 - 20 (14.5 - 20)	TL	-	148 A8	IND	385	1080	500	3273	W 12	W 11; 12 SDC; 12; W 13; 13 SDC; 13		40	3150
													40	4.00
	400/70 - 20 (16.0/70 - 20)	TL	16	149 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14		40	3250
													40	4.00
	400/70 - 20 (16.0/70 - 20)	TL	-	156 A8	IND	405	1080	501	3303	13	12 SDC; 13 SDC; 14		40	4000
													40	5.00
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	-	158 A8	IND	395	1175	544	3556	13	DW 12; 13 SDC; DW 13; DW 13 L; DW 14 L		40	4250
													40	5.00
	400/80 - 24 (15.5/80 - 24)	TL	20	162 A8	IND	405	1250	570	3781	DW 13	DW 12; DW 13 L; DW 14 L		40	4750
													40	5.00

IND: Industrial

Performance



Ø 24"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
440/80 - 24 (17.0/80 - 24)	TL	22	168 A8	IND	455	1315	610	3986	DW 14 L	DW 13; DW 13 L; DW 15 L		40	5600	
												40	5000	
460/70 - 24 (17.5L - 24)	TL	-	159 A8	IND	460	1250	-	-	DW 15 L	DW 14 L; DW 16 L		40	4375	
												40	4000	
500/70 - 24 (19.5L - 24)	TL	-	164 A8	IND	505	1300	579	3926	DW 16 L	DW 15 L; DW 18 L		40	5000	
												40	4000	
Ø 26"	480/80 - 26 (18.4 - 26)	TL	-	160 A8	IND	490	1410	643	4272	DW 15 L	DW 16 L		3.20	4500
													40	4000
Ø 28"	440/80 - 28 (16.9 - 28)	TL	-	156 A8	IND	450	1420	632	4299	DW 14 L	DW 13; DW 13 L; DW 15 L		3.20	4000
													40	4000

Performance



Stability



Traction



Cut and Chip Resistance

IND: Industrial



GRIP STAR



GRIP STAR is an agro-industrial tire for loading applications with telehandlers. It shows excellent traction and self-cleaning properties. Besides, it is an all-season tire particularly suitable for operations on muddy ground. GRIP STAR is also available in a "special" version that features extra cut and chip resistance.

Ø 24"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	4.00
15.5/80 - 24	TL	16	151 A6	163 A6	STD	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	
15.5/80 - 24	TT	16	151 A6	163 A6	STD	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	
15.5/80 - 24	TL	16	151 A6	163 A6	SPL	392	1270	569	3683	W 12	W 13; W 14 L	30 FR LLV	4875	
												30 DW LLV	3450	
												km/h / bar	4.00	

Performance



STD: Standard



LIFT STAR PLUS



LIFT STAR is a bias-ply tire specially designed for telehandlers operating in demanding construction operations and other severe applications. Its low-profile sidewall ensures excellent stability in high-lifting operations whereas its non-directional tread design allows for greater mounting versatility. In addition, the specially designed sidewall provides added cut-and-puncture protection.

Ø 28"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	3.25	
													5.00	
370/75 - 28	TL	14	-	STD	365	1270	583	3851	11.00	-	3.25	5.00	3250	-
											50	-	5450	
											10	-	-	
400/75 - 28	TL	16	-	STD	400	1318	592	3944	12.00 GR	-	3.50	5.00	3875	-
											50	-	6300	
											10	-	-	

STD: Standard

Technology



Heavy Duty

Performance



Durability



Stability



Cut and Chip Resistance



MP 567



MP 567 is an agro-industrial tire suitable for field and road transport and municipality/maintenance operations. It is the perfect tire for telehandlers and implement machinery. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties. This tire ensures a comfortable driving experience, together with a longer service life.

Ø 15"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	Load capacity (kg/tire)
Ø 15.3"	11.5/80 - 15	TL	12	-	-	STD	290	875	-	-	8 LB	-	30	2440
													40	2180
													Performance	
Ø 15.3"	10.0/75 - 15.3	TL	12	-	-	STD	258	774	355	2310	9.0	-	30	4.70
													40	1905
													40	1700
	10.0/75 - 15.3	TL	14	-	-	STD	258	774	355	2310	9.0	-	30	5.50
													40	2130
													40	1900
	10.0/75 - 15.3	TL	18	-	-	STD	258	774	355	2310	9.0	-	30	7.10
													40	2440
													40	2180
10.0/75 - 15.3	TL	10	-	-	STD	258	774	355	2310	9.0	-	30	3.90	
												40	1735	
												40	1550	
10.0/75 - 15.3	TL	10	111 A8	123 A8	IMP	258	774	355	2310	9.0	-	40 FR	3.90	
												40 DW	1550	
												40 DW	1090	
10.0/75 - 15.3	TL	12	114 A8	126 A8	IMP	258	774	355	2310	9.0	-	40 FR	4.70	
												40 DW	1700	
												40 DW	1180	

Performance



Comfort



Durability



Self-Cleaning



Traction

STD: Standard - IMP: Implement

Ø 15.3"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive wheel	Free rolling						Rec.	Alt.	km/h / bar	
10.0/75 - 15.3	TL	14	118 A8	130 A8	IMP	258	774	355	2310	9.0	-		5.50	
													40 FR	1900
													40 DW	1320
10.0/75 - 15.3	TL	18	123 A8	135 A8	IMP	258	774	355	2310	9.0	-		7.10	
													40 FR	2180
													40 DW	1550
11.5/80 - 15.3	TL	10	-		STD	292	868	393	2578	9.0	-		3.40	
													30	2185
													40	1950
11.5/80 - 15.3	TL	14	-		STD	292	868	393	2578	9.0	-		4.75	
													30	2720
													40	2430
11.5/80 - 15.3	TL	18	-		STD	292	868	393	2578	9.0	-		6.00	
													30	3050
													40	2725
11.5/80 - 15.3	TL	18	130 A8	143 A8	IMP	292	868	393	2578	9.0	-		6.00	
													40 FR	2725
													40 DW	1900
11.5/80 - 15.3	TL	10	119 A8	131 A8	IMP	292	868	393	2578	9.0	-		3.40	
													40 FR	1950
													40 DW	1360
11.5/80 - 15.3	TL	14	126 A8	139 A8	IMP	292	868	393	2578	9.0	-		4.75	
													40 FR	2430
													40 DW	1700

Performance



Comfort



Durability



Self-Cleaning



Traction

STD: Standard - IMP: Implement



Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
10.5 - 18	TT	10	-	STD	270	905	415	2768	9	9 SDC		3.75		
												90	1700	
												40	1955	
10.5 - 18	TL	10	-	STD	270	905	415	2768	9.0	9 SDC		3.75		
												90	1700	
												40	1955	
10.5 - 18	TL	12	-	STD	270	905	415	2768	9.0	9 SDC		4.50		
												90	1900	
												40	2190	
12.5 - 18	TT	10	-	STD	325	990	450	2940	11	12 SDC		3.00		
												90	1800	
												40	2070	
12.5 - 18	TL	10	-	STD	325	990	450	2940	11	12 SDC		3.00		
												90	1800	
												40	2070	
12.5 - 18	TT	12	-	STD	325	990	450	2940	11	12 SDC		3.50		
												90	1950	
												40	2245	
12.5 - 18	TL	12	-	STD	325	990	450	2940	11	12 SDC		3.50		
												90	1950	
												40	2245	
12.5 - 18	TL	16	-	STD	325	990	450	2940	11	12 SDC		4.50		
												90	2250	
												40	2585	

Performance



Comfort



Durability



Self-Cleaning



Traction

STD: Standard - IMP: Implement

Ø 19.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
Ø 19.5"	18 - 19.5	TL	14	-	STD	460	1104	498	3280	14.00	-		4.75	
													50	3925
													40	4150
	18 - 19.5	TL	16	-	STD	460	1104	498	3280	14.00	-		6.00	
													50	4500
													40	4700
18 - 19.5	TL	18	-	STD	460	1104	498	3280	14.00	-		7.25		
												50	5150	
												40	5460	
18 - 19.5 IND	TL	18	165 B / 167 A8	IND	460	1104	498	3280	14.00	-		7.25		
												50	5150	
												40	5460	
18 - 19.5 IND	TL	16	160 B / 162 A8	IND	460	1104	498	3280	14.00	-		6.00		
												50	4500	
												40	4700	
Ø 20"	10.5 - 20	TL	10	-	STD	270	955	445	2880	9	9 SDC		3.75	
													90	1800
													40	2070
	10.5 - 20	TT	10	-	STD	270	955	445	2880	9	9 SDC		3.75	
													90	1800
													40	2070
	12.5 - 20	TL	16	-	STD	325	1040	475	3090	11.0	12 SDC		4.50	
													90	2300
													40	2750

STD: Standard - IND: Industrial

Performance



Comfort



Durability



Self-Cleaning



Traction



Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
12.5 - 20	TT	10	-	STD	325	1040	475	3090	11.0	12 SDC		km/h / bar	3.00	
												90	1850	
												40	2130	
12.5 - 20	TL	10	-	STD	325	1040	475	3090	11.0	12 SDC		km/h / bar	3.00	
												90	1850	
												40	2130	
12.5 - 20	TT	12	-	STD	325	1040	475	3090	11.0	12 SDC		km/h / bar	3.50	
												90	2000	
												40	2300	
12.5 - 20	TL	12	-	STD	325	1040	475	3090	11.0	12 SDC		km/h / bar	3.50	
												90	2000	
												40	2300	
12.5 - 20	TL	10	-	HD	325	1040	475	3090	11.0	12 SDC		km/h / bar	3.00	
												90	1850	
												40	2130	
14.5 - 20	TL	10	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	2.50	
												90	2000	
												40	2300	
14.5 - 20	TL	12	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	3.00	
												90	2240	
												40	2580	
14.5 - 20	TL	14	-	STD	360	1116	495	3315	11	12 SDC		km/h / bar	3.50	
												90	2430	
												40	2790	

Performance



Comfort



Durability









Self-Cleaning



Traction

STD: Standard - HD: Heavy Duty

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14.5 - 20	TL	16	-	STD	360	1116	495	3315	11	12 SDC		4.00	
												90	2575
												40	2960
14.5 - 20	TL	18	-	STD	360	1116	495	3315	11	12 SDC		4.50	
												90	2725
												40	3135
14.5 - 20	TL	14	-	HD	360	1116	495	3315	11	12 SDC		3.50	
												90	2430
												40	2790
16.0/70 - 20 (405/70 - 20)	TL	14	-	STD	405	1128	490	3350	13 SDC	12		3.50	
												90	2900
												40	3340
16.0/70 - 20 (405/70 - 20)	TT	14	-	STD	405	1128	490	3350	13 SDC	12		3.50	
												90	2900
												40	3340

Performance



Comfort



Durability



Self-Cleaning



Traction



STD: Standard - HD: Heavy Duty



MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-	7.50	
												40 DW	5800
												30 DW	6500
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-	5.50	
												40 DW	4875
												30 DW	5450

STD: Standard

Performance



Durability



Stability




Traction



MP 600



MP 600 is an agro-industrial tire, suitable for municipality/maintenance operations with telehandlers and implement machinery, providing a comfortable driving experience. This tire provides good traction and excellent self-cleaning properties along with an extended product life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS Drive wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
10.5 - 18	TL	10	-	STD	272	920	420	2740	9	9 SDC	km/h / bar	3.75	
											40 DW	1950	
											50 DW	1900	
12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.00	
											40 DW	2060	
											50 DW	2000	
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	km/h / bar	3.50	
											40 DW	2300	
											50 DW	2240	
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	STD	405	1085	-	-	13 SDC	12	km/h / bar	4.00
												40 DW	3550
												50 DW	3250

Performance



Comfort



Durability




Self-Cleaning



Traction

STD: Standard



Ø 24"	Tire size	TYPE	PR	LI/SS Drive wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
400/70 - 24 (16.0/70 - 24)	TL	14	-	STD	405	1185	545	3530	13 SDC	12		km/h / bar	3.50	
												40 DW	3650	
												50 DW	3550	
400/70 - 24 (16.0/70 - 24)	TL	10	-	STD	405	1185	545	3530	13 SDC	12		km/h / bar	2.50	
												40 DW	2975	
												50 DW	2900	
400/70 - 24 (16.0/70 - 24)	TL	18	158A8	STD	405	1185	545	3530	13 SDC	12		km/h / bar	4.50	
												40 DW	4250	
												50 DW	4125	
400/70 - 24 (16.0/70 - 24)	TL	14	-	SPL	405	1185	545	3530	13 SDC	12		km/h / bar	3.50	
												40 DW	3650	
												50 DW	3550	

Performance



Comfort



Durability



Self-Cleaning



Traction

STD: Standard - SPL: Special



TR 461



TR 461 is a BKT pattern suitable for municipality and maintenance applications with tractors as well as for loading operations with telehandlers. The sidewall protection features particular resistance against cuts and bruises providing a longer life even on hard surfaces in addition to excellent stability.

Ø 18"	Tire size	TYPE	PR	LI/SS	LI/SS Drive wheel	LI/SS Free rolling	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
												Rec.	Alt.	km/h / bar	
Ø 18"	12.5/80 - 18	TL	12	-	129 A8	142 A8	STD	305	987	435	2902	W 9	11	3.70	
														10 FR	3710
														25 FR	3155
														30 FR	2970
														40 FR	2650
														10 DW	2590
														25 DW	2200
														30 DW	2070
40 DW	1850														
Ø 24"	16.9 - 24	TL	14	151 A8	-	-	STD	440	1280	566	3763	DW 15 L	DW 14 L	2.90	
														40	3450
	19.5L - 24	TL	12	151 A8	-	-	STD	490	1310	578	3851	DW 16 L	-	2.30	
														40	3450
	19.5L - 24	TL	14	154 A8	-	-	STD	490	1310	578	3851	DW 16 L	-	2.60	
														40	3750
	21L - 24	TL	14	157 A8	-	-	STD	540	1385	607	4072	DW 18 L	-	2.50	
														40	4125
Ø 28"	16.9 - 28	TL	14	154 A8	-	-	STD	440	1390	620	4087	DW 15 L	DW 14 L	2.90	
														40	3750
Ø 34"	620/60 B 34	TL	-	175 A8	-	-	HD	615	1629	750	4930	DW 20 B	-	4.00	
														40	6900

Performance

Cut and Chip Resistance

Durability

Road Oriented

Stability

STD: Standard - HD: Heavy Duty



LIGHT TRUCK





LIGHT TRUCK



Bias

LT TR 182



LT TR 182 is suitable for transport operations on light trucks. This high-speed tire is road oriented and significantly reduces fuel consumption. The LT TR 182 tire is also easy to mount.

Ø 14.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
8 - 14.5	TL	TL	12	-	STD	207	710	-	-	6.00 MH	-		6.90	
													100 LS	1285
													100 LD	1130
8 - 14.5	TL	TL	14	-	STD	207	710	-	-	6.00 MH	-		7.90	
													100 LS	1375
													100 LD	1210

Performance



Durability



Fuel Economy



Road Oriented

STD: Standard





TUF LUG



TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	6.20	
											100 LS	1400	
											100 LD	1250	
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	6.90	
											100 LS	1500	
											100 LD	1320	
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	7.60	
											100 LS	1600	
											100 LD	1400	

Performance



STD: Standard



LOW PLATFORM





LOW
PLATFORM

Bias

IT 400



IT 400 is a road-oriented rib-pattern tire for low platforms in transport applications. The tire is suitable for high-speed applications and provides significant fuel savings.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.				
												km/h / bar	7.60	6.90	6.20
10.00 - 15	TT	14	137/133 J	STD	274	925	408	2747	7.5	7.0 ; 8.0	15	3680	-	-	
											30	-	3035	-	
											100 LS	-	2300	-	
											100 LD	-	-	2060	
10.00 - 15	TT	16	141/136 J	STD	274	925	408	2747	7.5	7.0 ; 8.0	km/h / bar	8.60	7.90	7.20	
											15	4120	-	-	
											30	-	3400	-	
											100 LS	-	2575	-	
100 LD	-	-	2240												
10.00 - 15	TT	18	-	STD	274	925	408	2747	7.5	7.0 ; 8.0	km/h / bar	9.70	8.90	8.10	
											15	4510	-	-	
											30	-	3640	-	
											100 LS	-	2725	-	
100 LD	-	-	2360												
7.50 - 15	TT	16	-	STD	210	795	356	2361	6.0	5.50 F ; 6.50	km/h / bar	9.90	9.20		
											15	2880	-		
											30	-	2375		
8.25 - 15	TL	14	129/125 J	STD	239	846	377	2513	6.50	6.0 ; 7.0	km/h / bar	8.60	7.90	7.20	
											15	2960	-	-	
											30	-	2440	-	
											100 LS	-	1850	-	
100 LD	-	-	1650												

STD: Standard

Technology



Performance





LOW
PLATFORM

IT 400

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
										Rec.	Alt.				
												km/h / bar	9.70	9.00	8.30
8.25 - 15	TT	16	-	STD	239	846	377	2513	6.50	6.0; 7.0	15	3150	-	-	
											30	-	2600	-	
											100 LS	-	1950	-	
											100 LD	-	-	1700	
8.25 - 15	TT	14	129/125 J	STD	239	846	377	2513	6.50	6.0; 7.0	km/h / bar	8.60	7.90	7.20	
											15	2960	-	-	
											30	-	2440	-	
											100 LS	-	1850	-	
100 LD	-	-	1650												

Technology



High Speed

Performance



Fuel Economy



Road Oriented

STD: Standard





LOW
PLATFORM



Bias

LP 450



LP 450 is a road-oriented tire for low platforms in transport applications. This high-speed tire provides significant fuel savings as well as an extended tire life-cycle.

Ø 14.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
8 - 14.5	TL	12	-	-	STD	214	710	321	2109	6.00 MH	-	6.90	
												100 LS	1285
												100 LD	1130
9 - 14.5	TL	12	-	-	STD	246	712	322	2115	7.00 MH	-	6.90	
												100 LS	1500
												100 LD	1320
9 - 14.5	TL	14	-	-	STD	246	712	322	2115	7.00 MH	-	7.90	
												100 LS	1625
												100 LD	1430

Performance



Durability



Fuel Economy



Road Oriented

STD: Standard



TRAILER





TRAILER

Radial

LIFTMAX LM 63



LIFTMAX LM 63 has been specially developed for industrial and logistics operations. The 3-rib tread design provides low rolling resistance with good wet grip and uniform tread wear with better handling. It is an All Steel radial tire with multilayer steel belts offering lower vibration as well as enhanced stability and comfort.

Ø 8"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
180/70 R 8 (18 X 7 R 8)	TL	-	125 A5	STD	170	460	-	-	4.33R	-	25	10.00	1650	
Ø 9"	6.00 R 9	TL	-	121 A5	STD	160	542	-	-	4.00 E	-	25	10.00	1450
Ø 10"	6.50 R 10	TL	-	128 A5	STD	176	592	-	-	5.00 F; 5.50 F	-	25	10.00	1800
Ø 12"	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-	25	10.00	2240
Ø 15"	7.00 R 15	TL	-	143 A5	STD	198	738	-	-	5.50	5.00	25	10.00	2725
8.25 R 15	TL	-	153 A5	STD	240	844	-	-	6.5	7.0		25	10.00	3650

STD: Standard

Technologies



All Steel

Performance



Stability



Comfort





TRAILER

Radial

PORTMAX PT 93



PORTMAX PT 93 is a terminal tractor and trailer tire, which has been specifically engineered for heavy-duty operations in terminal environments such as ports and logistic hubs. The special antistatic tread compound ensures excellent wear and heat resistance even under the most demanding operating conditions. PORTMAX PT 93 offers excellent handling features and outstanding grip along with enhanced durability.

PORTMAX

RADIAL PORT TIRES

Ø 22.5"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
280/75 R 22.5	TL	-	168 A8	IND	282	998	-	-	8.25	9.00	40	5600	
310/80 R 22.5	TL	-	175 A8	IND	308	1070	-	-	9.00	-	40	6900	

Technologies



Special Antistatic Compound

Performance



Durability



Comfort



Heat Resistance



IND: Industrial



BK 6060



BK 6060 is a both field- and road-oriented tire for trailers and backhoe loaders in transport as well as digging and loading applications. This block pattern tire provides an extended tire life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	7.25
													
9.00 - 16	TT	16	-	IND	255	925	427	2740	6.50 H	6.00 G	30	2300	

IND: Industrial

Technologies



Special Compound

Performance



Durability



On/Off Road



CON TRAILER



CON TRAILER is a trailer tire particularly suitable for port applications. It is the ideal tire for on-and-off-the-road applications. Its robust construction results in high load capacity, whereas its extra-deep tread allows for a better mileage.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	9.10	8.40
	10.00 - 20	TT	18	-	PORT IND	286	1080	-	-	7.5	7.0; 8.0	40 LS	3535	-
												40 LD	-	3135

PORT IND: Port Industrial

Technologies



Extra Deep Tread

Performance



High Load Capacity



High Mileage



FLOTATION TR 675



FLOTATION TR 675 is best suited for field and road transport. It fits trailers and implement machinery. FLOTATION TR 675 has been engineered to provide outstanding traction, high load capacity and a longer tire life.

Ø 22.5"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	1.50	2.00	2.40
500/60 - 22.5	TL	12	145 A8/ 142 B	157 A8/ 154 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	10 FR	4390	5195	5775	
												20 FR	3950	4675	5200	
												30 FR	3510	4155	4620	
												40 FR	3135	3710	4125	
												50 FR	2820	3340	3750	
												10 DW	3085	3645	4060	
												20 DW	2780	3280	3655	
												30 DW	2470	2920	3250	
												40 DW	2205	2605	2900	
												50 DW	1985	2345	2650	
500/60 - 22.5	TL	16	151 A8/ 148 B	163 A8/ 159 B	STD	500	1181	534	3505	AG 16.00	15.00; 17.00	10 FR	6315	6575	6825	
												20 FR	5685	5915	6145	
												30 FR	5050	5260	5460	
												40 FR	4510	4695	4875	
												50 FR	4060	4225	4375	
												10 DW	4465	4650	4830	
												20 DW	4020	4185	4345	
												30 DW	3575	3720	3865	
												40 DW	3190	3320	3450	
												50 DW	2870	2990	3150	
500/60 - 22.5	TL	20	155 A8/ 151 B	168 A8/ 164 B	DB	500	1181	534	3505	AG 16.00	15.00; 17.00	10 FR	7425	7545	7840	
												20 FR	6685	6790	7055	
												30 FR	5940	6035	6270	
												40 FR	5305	5390	5600	
												50 FR	4775	4850	5000	
												10 DW	5255	5340	5425	
												20 DW	4730	4805	4885	
												30 DW	4205	4275	4340	
												40 DW	3755	3815	3875	
												50 DW	3380	3435	3450	

STD: Standard; DB: Dual Belted

Performance



Durability



High Load Capacity



Traction





TRAILER

FLOTATION TR 675

Ø 22.5"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)			
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	3.00	3.50	4.00
550/45 - 22.5	TL	20	154 A8/ 150 B	166 A8/ 162 B	STD	543	1070	-	-	AG 16.00	-	10 FR	6270	6860	7420	
												20 FR	5645	6175	6680	
												30 FR	5020	5490	5935	
												40 FR	4480	4900	5300	
												50 FR	4030	4410	4750	
												10 DW	4440	4860	5250	
												20 DW	3995	4370	4725	
												30 DW	3550	3885	4200	
												40 DW	3170	3470	3750	
												50 DW	2855	3125	3350	
550/60 - 22.5	TL	12	148 A8/ 144 B	160 A8/ 156 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	5175	5755	6300	
												20 FR	4655	5180	5670	
												30 FR	4140	4605	5040	
												40 FR	3695	4110	4500	
												50 FR	3325	3700	4000	
												10 DW	3620	4030	4410	
												20 DW	3255	3630	3970	
												30 DW	2895	3225	3530	
												40 DW	2585	2880	3150	
												50 DW	2325	2590	2800	
550/60 - 22.5	TL	16	154 A8/ 150 B	167 A8/ 163 B	STD	550	1260	547	3640	AG 16.00	-	10 FR	6970	7310	7630	
												20 FR	6275	6575	6865	
												30 FR	5580	5845	6105	
												40 FR	4980	5220	5450	
												50 FR	4480	4700	4875	
												10 DW	4795	5025	5250	
												20 DW	4315	4525	4725	
												30 DW	3835	4020	4200	
												40 DW	3425	3590	3750	
												50 DW	3085	3230	3350	

STD: Standard

Performance



Durability



High Load Capacity



Traction



INDUSTRIAL RIB F3



INDUSTRIAL RIB F3 is an agro-industrial rib-pattern tire designed for field and road transport as well as for soil tillage operations with implement machinery and trailers. This tire features an outstanding stubble-resistant compound making it suitable for the most critical operating conditions and ensuring a long tire life-cycle.

INDUSTRIAL

MATERIAL HANDLING TIRES

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
11L - 15 SL	TL	12	-	STD	279	813	-	-	8 LB	10 LB		4.20		
												30	1290	
												40	1160	
11L - 15 SL	TL	10	-	STD	279	813	-	-	8 LB	10 LB		3.60		
												30	1185	
												40	1060	
11L - 15 SL	TL	10	-	SR	279	813	-	-	8 LB	10 LB		3.60		
												30	1185	
												40	1060	
11L - 15 SL	TL	12	-	SR	279	813	-	-	8 LB	10 LB		4.20		
												30	1290	
												40	1160	
Ø 16"	11L - 16 SL	TL	12	-	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L		4.40	
													30	1385
													40	1250
11L - 16 SL	TL	10	-	STD	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L		3.60		
												30	1250	
												40	1120	
11L - 16 SL	TL	10	-	SPL	279	830	-	-	W 8 L	8 LB; 10 LB; W 10 L		3.60		
												30	1250	
												40	1120	

STD: Standard - SR: Stubble Resistance - SPL: Special

Technologies



Special Compound

Performance



Stubble resistance




Durability

MULTI RIB



MULTI RIB is an agro-industrial tire for soil tillage and transport applications with 2WD tractors and implement machinery. It offers excellent handling throughout its long product life-cycle. Several versions are available for every need: an "aramid belted" version with improved puncture resistance, while the "HD" is made of a special cut-and-chip resistance compound.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
11.00 - 16	TL	12	-	-	STD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550
												40	1550
11.00 - 16	TL	12	-	-	AB HD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550
												40	1550
11.00 - 16	TL	12	-	-	HD	315	930	-	-	W 10 L	W 8;W 8 L	4.10	1550
												40	1550

STD: Standard - AB HD: Aramid Belted HD - HD: Heavy Duty

Technologies



Aramid Belted



Heavy Duty

Performance



Steering Control



Durability



Cut and Chip Resistance



High Puncture Resistance



TRAILER

Bias

RIB F3



RIB F3 is a field-oriented tire designed for 2WD tractors in soil tillage and haulage operations. Some sizes are suitable for transport applications using trailers. The RIB F3 tire is the ideal partner for all operations that require a high level of handling. It has been designed with a hard compound to ensure great durability and stubble resistance.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
9.00 - 16	TT	12	120 A6/112 A8	STD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		
9.00 - 16	TL	12	120 A6/112 A8	STD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		
9.00 - 16	TT	12	120 A6/112 A8	HD	245	878	387	2573	W 8	6.00 F; W 7; W 8 L	30	1400	
											40	1120	
											4.70		

STD: Standard - HD: Heavy Duty

Technologies



Hard Compound

Performance



Durability



Steering Control





Stubble resistance



SAND KING



SAND KING is a block pattern tire specially designed for trailers in transport applications. It provides excellent traction on sandy surfaces and best ground contact.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
7.50 - 16	TT	12	-	STD	215	820	378	2471	5.50 F SDC	6.00 G	65 LS	6.20	
												1360	
7.50 - 16	TT	8	-	STD	215	820	378	2471	5.50 F SDC	6.00 G	65 LS	4.15	
												1090	
7.50 - 16	TT	10	-	STD	215	820	378	2471	5.50 F SDC	6.00 G	65 LS	5.20	
												1215	

Performance



STD: Standard





TRAILER

Bias

SAND MASTER



SAND MASTER is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
7.50 - 16	TT	12	-	STD	215	820	-	-	5.50 F SDC	6.00 G	65 LS	6.20	1360
											65 LS	7.60	1550
7.50 - 16	TT	16	-	STD	215	820	-	-	5.50 F SDC	6.00 G	65 LS	4.15	1090
											65 LS		

Performance





STD: Standard



SAND STAR



SAND STAR is a block pattern tire specially designed for trailers. It provides excellent traction on sandy surfaces and best ground contact. It also reduces soil compaction.

Ø 13"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	2.75
													
9.00 - 13	TT	8	116A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	1250	
9.00 - 13	TL	8	116A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	1250	
9.00 - 13	TL	6	108D	STD	245	784	-	-	5.50 F	5.50 WB	65	1000	
9.00 - 13	TT	10	119A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	1360	
9.00 - 13	TL	10	119A8	STD	245	784	-	-	5.50 F	5.50 WB	40 FR LLV	1360	
9.00 - 13	TT	6	108D	STD	245	784	-	-	5.50 F	5.50 WB	65	1000	

Performance



STD: Standard



SUPER SAND



SUPER SAND is particularly suitable for trailers operating on sandy surfaces during hot weather conditions. It features high flotation capability and is ideal for all operations requiring a high level of handling.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
Ø 15"	9.00 - 15	TT	6	-	STD	275	854	-	-	7.00	-	65 LS	2.40
												65 LD	925
Ø 16"	9.00 - 16	TT	8	-	STD	255	885	-	-	6.50 H	6.00 G	65 LS	2.40
												65 LD	975
Ø 20"	14.00 - 20	TT	12	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	2.40
												65 LD	2360
												65 LD	2060
Ø 20"	14.00 - 20	TT	16	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	4.85
												65 LD	3540
												65 LD	3115
Ø 20"	14.00 - 20	TT	18	-	STD	385	1225	-	-	10.00 V	10.00 W	65 LS	5.85
												65 LD	3965
												65 LD	3490
Ø 20"	16.00 - 20	TT	16	-	STD	415	1305	-	-	10.00 W	-	50	2.40
												65 LD	3650

Performance




STD: Standard



TUF LUG



TUF LUG is suitable for trailers and light trucks in transport applications. This tire offers good traction and great durability and ensures a long product life-cycle.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
7.50 - 16	TT	12	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	6.20	
											100 LS	1400	
											100 LD	1250	
7.50 - 16	TT	14	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	6.90	
											100 LS	1500	
											100 LD	1320	
7.50 - 16	TT	16	-	STD	216	830	-	-	6.00 G	5.50 F	km/h / bar	7.60	
											100 LS	1600	
											100 LD	1400	

STD: Standard

Performance



Durability



Traction





TRAILER

Bias

RIB 324



RIB 324 has been designed with a special block tread pattern and a large contact area to provide best stability and flotation features on loose soil and sandy terrain. The strong nylon casing and sidewall along with a special tread compound stand for excellent resistance against punctures and wear as well as higher load capacity.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
66 X 44.00 - 25	TL	20	-	STD	1110	1700	-	-	36.0 TH	-	50	3.50	7300

Technologies



Special Compound



STD: Standard



BK 826



BK 826 has been specially designed for trailers in haulage applications. It is a bias tire featuring high load capacity thanks to its reinforced carcass. BK 826 is also available as "industrial" version that shows particular cut and chip resistance and is also suitable for backhoe loaders.

Ø 16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
8.25 - 16	TT	14	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	6.90	
											100 LS	1745	
											100 LD	1650	
8.25 - 16	TT	16	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											100 LS	1850	
											100 LD	1750	
8.25 - 16	TT	18	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	8	-	STD	238	863	-	-	6.50 H	6.00 G	km/h / bar	4.25	
											100 LS	1350	
											100 LD	1275	
8.25 - 16	TT	18	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.95	
											100 LS	1900	
											100 LD	1800	
8.25 - 16	TT	16	-	IND	238	863	-	-	6.50 H	6.00 G	km/h / bar	8.40	
											40 LS	2130	
											40 LD	2015	
8.25 - 16	TT	16	134A8	TR TR	238	863	-	-	6.50 H	6.00 G	km/h / bar	7.60	
											40	2120	
9.00 - 16	TT	12	-	STD	265	925	-	-	6.50 H	6.00 G	km/h / bar	5.15	
											30	1900	
9.00 - 16	TT	14	-	STD	265	925	-	-	6.50 H	6.00 G	km/h / bar	6.20	
											30	2120	

STD: Standard - IND: Industrial - TR TR: Tractor Trailer

Technologies



Reinforced Carcass

Performance



Cut and Chip Resistance



High Load Capacity





TRAILER

BK 826

Ø16"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
9.00 - 16	TT	16	-	STD	265	925	-	-	6.50 H	6.00 G		30	7.25	2300
9.00 - 16	TT	18	-	STD	265	925	-	-	6.50 H	6.00 G		30	7.60	2360
9.00 - 16	TT	16	-	IND	265	925	-	-	6.50 H	6.00 G		30	7.25	2300
9.00 - 16	TT	12	-	SPL	265	925	-	-	6.50 H	6.00 G		30	5.15	1900
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G		30	7.60	2360
9.00 - 16	TT	18	138A8	TR TR	265	925	-	-	6.50 H	6.00 G		30	7.60	2360

Technologies



Reinforced Carcass

Performance



Cut and Chip Resistance



High Load Capacity

STD: Standard - IND: Industrial - SPL: Special - TR TR: Tractor Trailer



COLT



COLT is a block pattern tire suitable for transport with trailers and light trucks, both in the field and on the road. COLT ensures extended durability and high performance during the entire product life-cycle.

Ø 15"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
7.50 - 15	TT	12	-	STD	217	790	-	-	6.00	-		km/h / bar	6.00	
												100 LS	1385	
												100 LD	1315	
7.50 - 15	TT	14	-	STD	217	790	-	-	6.00	-		km/h / bar	6.50	
												100 LS	1450	
												100 LD	1375	
7.50 - 15	TT	16	-	STD	217	790	-	-	6.00	-		km/h / bar	7.50	
												100 LS	1500	
												100 LD	1440	
Ø 16"	7.50 - 16	TT	16	-	IND	212	820	-	-	6.00 G	5.50 F		km/h / bar	8.40
													40	1840
7.50 - 16	TT	14	-	STD	212	820	-	-	6.00 G	5.50 F		km/h / bar	6.90	
												100 LS	1500	
												100 LD	1320	
7.50 - 16	TT	16	-	STD	212	820	-	-	6.00 G	5.50 F		km/h / bar	7.60	
												100 LS	1600	
												100 LD	1400	

STD: Standard; IND: Industrial

Performance



Durability



High Mileage



Traction





TRAILER

Bias

TR 387 IND



TR 387 IND is an industrial tire suitable for industrial trailers and compactors. It features high load capacity and is available in different versions to meet specific user requirements in terms of cut and chip resistance, heavy-duty services and durability. The "dual bead" version is particularly suitable for industrial tractors and transport operations using trailers.

Ø 30"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
620/75 - 30 (23.1 - 30)	TL	16	161 A6	DB	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.30	
												30	4625	
620/75 - 30 (23.1 - 30)	TL	18	164 A6	DB HD	605	1675	-	-	DW 20 A; DW 20 B	-		30	2.60	
												30	5000	
Ø 32"	24.5 - 32	TL	16	164 A6	DB HD	625	1755	790	5226	DH 21	DH 21 B; DH 21 H; DH 21 HB		30	2.10
													30	5000

DB: Dual Belted - DB HD: Dual Belted HD

Technologies



Reinforced Bead

Performance



Cut and Chip Resistance



Durability



Heavy Duty



High Load Capacity





TRAILER

Bias

TR 678



TR 678 has been specially designed for forestry applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 34"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
600/65 - 34	TL	16	166 A2/162 A6	SB	610	1644	758	4916	DW 20 B	-		2.60		
												30	4750	
												10	5300	
600/65 - 34	TL	20	170 A2/166 A6	SB	610	1644	758	4916	DW 20 B	-		3.20		
												30	5300	
												10	6000	
600/65 - 34	TL	14	164 A2/160 A6	SB	610	1644	758	4916	DW 20 B	-		2.40		
												30	4500	
												10	5000	
700/55 - 34	TL	20	173 A2/168 A6	SB	700	1640	757	4890	DW 24 B	-		3.20		
												30	5600	
												10	6500	
700/55 - 34	TL	14	168 A2/163 A6	SB	700	1640	757	4890	DW 24 B	-		2.40		
												30	4875	
												10	5600	

SB: Steel Belted - STD: Standard

Technologies



Steel Belted

Performance



Cut and Chip Resistance



High Load Capacity



Self-Cleaning



Traction



TRAILER

Bias

TR 678 IND



TR 678 IND has been specially designed for industrial applications. Its robust lug design provides excellent traction and self-cleaning. The strong casing structure stands for high load capacity whereas its steel belts protect the tire from punctures and damages. TR 678 features a cut-resistant tread compound providing excellent cut-and-chip resistance even on difficult terrains under extreme conditions.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	6.00
600/40 - 22.5	TL	-	169A8	DB	615	1085	483	3264	AG 20.00	-		40	5800	

DB: Dual Belted

Technologies



More Lugs



Steel Belted



Strong Casing

Performance



Cut and Chip Resistance



High Load Capacity



High Puncture Resistance



Self-Cleaning



Traction



MILITARY TRUCK





Bias

MT 612



MT 612 has been specially designed for multipurpose use on and off the road. Its strong casing allows carrying heavy loads at high speed whereas its broad lugs provide outstanding traction. The extra tread width ensures excellent flotation on sand and mud.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
14.00 - 20	TT	18	-	STD	390	1265	594	3827	10	-	km/h / bar	6.60	
											80 LS	4500	
											80 LD	4000	
14.00 - 20	TT	22	-	STD	390	1265	594	3827	10	-	km/h / bar	8.60	
											80 LS	5300	
											80 LD	4750	
14.00 - 20	TT	20	-	STD	390	1265	594	3827	10	-	km/h / bar	7.60	
											80 LS	4875	
											80 LD	4375	
16.0/70 - 20	TT	16	147 F	STD	408	1100	520	3327	13.00 T	-	km/h / bar	4.50	
											80 LS	3075	
											80 LD	2725	

Performance



STD: Standard





Bias

MT 617



MT 617 has been specially designed for military trucks. It is a run-flat tire featuring excellent traction and high puncture resistance. Besides, its sidewall protection contributes to an extended tire life-cycle.

Ø 21"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar	Load capacity (kg/tire)	
													90 LS	90 LD
14.5 - 21	TL	12	-	-	AB	392	1220	-	-	10	-	4.80	4.20	
												3605	-	
												-	3160	
14.5 - 21	TL	12	-	-	STD	392	1220	-	-	10	-	4.80	4.20	
												3605	-	
												-	3160	

STD: Standard - AB: Aramid Belted

Performance



Durability



High Puncture Resistance



Traction



UNIVERSAL VEHICLE MULTIPURPOSE





UNIVERSAL
VEHICLE
MULTIPURPOSE



 Radial

EARTHMAX SR 33



EARTHMAX SR 33 is a radial tire for multipurpose trucks. Its multi-block tread pattern has been specially designed to guarantee extraordinary traction on soft, sandy, or muddy surfaces. EARTHMAX SR 33 provides outstanding stability in addition to best self-cleaning properties. The strong All Steel casing features excellent durability and resistance to snag and punctures.

EARTHMAX
RADIAL OTR TIRES

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
14.00 R 20	TL	-	164/160 J	STD	390	1250	576	3840	10.00	9.0; 10.00 W	km/h / bar		7.50
											100 LS	5000	
											100 LD	4500	
335/80 R 20	TL	-	150 K	STD	335	1047	490	3213	11.00	-	km/h / bar		6.50
											110	3350	
											km/h / bar		6.20
365/80 R 20 (14.5 R 20)	TL	-	152 K	STD	360	1096	477	3280	10.00	10.00 W	km/h / bar		6.20
											110	3550	
											km/h / bar		8.50
395/85 R 20	TL	-	168 J	STD	394	1184	538	3589	10.00 W; 10.00 HF	-	km/h / bar		8.50
											100	5600	
											km/h / bar		8.50

Technology



All Steel

Performance



Traction on Sand



Durability

STD: Standard





UNIVERSAL
VEHICLE
MULTIPURPOSE



 Radial

EARTHMAX SR 33 PLUS



EARTHMAX SR 33 PLUS is a radial tire with a multi-block tread pattern specially designed for exceptional flotation and traction on soft, sandy and muddy surfaces. Its strong All Steel casing and belts provide excellent durability and resistance to snag and punctures. EARTHMAX SR 33 PLUS features excellent self-cleaning properties and provides superior stability.

EARTHMAX
RADIAL OTR TIRES

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
16.00 R 20	TL	-	173/170 G	STD	448	1310	582	3974	11.25	10.00 W; 10.0	90	7.60	6500

STD: Standard

Technologies



Steel Belted



Strong Casing

Performance



Traction



Self cleaning



Stability



Cut and Chip Resistance



Durability



Multi-Purpose Tires



UNIVERSAL
VEHICLE
MULTIPURPOSE

Radial

MULTIMAX MP 513



MULTIMAX MP 513 has been designed by BKT for multi-purpose vehicles in municipality/maintenance and transport applications, for both agricultural and industrial uses. It is perfect for universal vehicles and fertilizer trucks. Thanks to the strong steel-belted nylon casing, MULTIMAX MP 513 allows to carry heavy loads at high speeds providing a comfortable driving experience. It ensures a longer service life and traction along with outstanding self-cleaning properties.

MULTIMAX
RADIAL MPT TIRES

Ø 17"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)									
										Rec.	Alt.										
												km/h / bar	1.2	1.6	2.0	2.4	2.8	3.2	3.5	4.0	
425/55 R 17 MPT	TL	-	142 A8/B	STD	421	900	399	2705	13	13.00											
											50	1035	1275	1515	1725	1965	2200	2360	2650		
											40	1035	1275	1515	1725	1965	2200	2360	2650		
											30	1110	1365	1620	1850	2105	2360	2530	2840		
425/55 R 17 MPT	TL	-	134 G	STD	421	900	399	2695	13	13.00											
											km/h / bar	1.6	2.0	2.5	3.0	3.5					
											90	1080	1280	1550	1830	2120					
											65	1175	1390	1685	1990	2305					
425/55 R 17 MPT	TL	-	134 G	STD	421	900	399	2695	13	13.00											
											40	1245	1475	1785	2105	2440					
Ø 18"	365/70 R 18 MPT	TL	-	133 G	STD	360	969	448	2954	11	11 SDC; 12; 12 SDC										
												km/h / bar	1.6	2.0	2.5	3.0	3.5	3.75			
												90	1080	1280	1520	1760	2000	2060			
												65	1170	1380	1650	1910	2170	2240			
405/70 R 18 MPT	TL	-	133 G	STD	360	969	448	2954	11	11 SDC; 12; 12 SDC											
											40	1250	1470	1750	2020	2300	2370				
Ø 20"	375/70 R 20 MPT	TL	-	136 G	STD	377	1034	472	3121	12	W 10; DW 10; 11; 11 SDC; W 11; DW 11; 12 SDC										
												km/h / bar	1.6	2.0	2.5	3.0	3.5				
												90	1210	1435	1705	1975	2240				
												65	1315	1560	1855	2145	2435				
405/70 R 20 MPT	TL	-	136 G	STD	407	1076	493	3253	13	13 SDC; 12 SDC											
											40	1395	1655	1965	2275	2580					
405/70 R 20 MPT	TL	-	136 G	STD	407	1076	493	3253	13	13 SDC; 12 SDC											
											km/h / bar	1.6	2.0	2.5	3.0	3.5					
											90	1340	1580	1820	2040	2240					
											65	1455	1715	1975	2215	2435					
425/75 R 20 MPT	TL	-	148 G	STD	421	1146	521	3479	13	13 SDC; 11 SDC; 12 SDC; 11; 12											
											40	1545	1820	2095	2350	2580					
425/75 R 20 MPT	TL	-	148 G	STD	421	1146	521	3479	13	13 SDC; 11 SDC; 12 SDC; 11; 12											
											km/h / bar	1.6	2.0	2.5	3.0	3.5	4.0				
											90	1540	1810	2150	2490	2820	3150				
											65	1675	1965	2335	2705	3060	3420				
425/75 R 20 MPT	TL	-	148 G	STD	421	1146	521	3479	13	13 SDC; 11 SDC; 12 SDC; 11; 12											
											40	1775	2085	2475	2865	3245	3625				
Ø 24"	495/70 R 24 MPT	TL	-	155 G	STD	499	1304	588	3974	W 16 L	DW 15 L; DW 16 L; W 15 L										
												km/h / bar	1.6	2.0	2.5	3.0	3.5				
												90	1980	2340	2840	3250	3875				
												65	2150	2540	3085	3530	4205				
495/70 R 24 MPT	TL	-	155 G	STD	499	1304	588	3974	W 16 L	DW 15 L; DW 16 L; W 15 L											
											40	2280	2695	3270	3740	4460					

STD: Standard

Technology



High Speed



Steel Belted

Performance



Durability



Handling & Comfort




Traction



Self cleaning



UNIVERSAL
VEHICLE
MULTIPURPOSE








 Radial

MULTIMAX MP 540



MULTIMAX MP 540 has been designed by BKT for multi-purpose vehicles in municipality/maintenance applications. It is suitable for all universal vehicles. Thanks to the All Steel casing, MULTIMAX MP 540 enables to carry heavy loads at high speeds. In addition, its block pattern design provides outstanding stability and durability.

MULTIMAX
RADIAL MPT TIRES

Ø 20"	Tire size	TYPE	STAR RATING	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
										Rec.	Alt.	km/h / bar	4.0	4.5	5.0	5.5	6.0	6.5	
																			
335/80 R 20	TL	-	149 K	STD	340	1044	492	3258	11	-									
												110	2205	2420	2635	2845	3050	3250	
												100	2205	2420	2635	2845	3050	3250	
												90	2250	2470	2685	2900	3110	3315	
												80	2290	2520	2740	2955	3170	3380	
												70	2360	2595	2820	3045	3265	3480	

STD: Standard

Technology



Block pattern



High Speed



All Steel

Performance



Stability



Durability



High Load Capacity





UNIVERSAL
VEHICLE
MULTIPURPOSE

Bias

MP 567



MP 567 is an agro-industrial tire suitable for field and road transport and municipality/maintenance operations. It is the perfect tire for telehandlers and implement machinery. The MP 567 tire provides good traction in all the weather conditions as well as excellent self-cleaning properties. This tire ensures a comfortable driving experience, together with a longer service life.

Ø 15"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
Ø 15.3"	11.5/80 - 15	TL	12	-	-	STD	290	875	-	-	8 LB	-	30	2440
													40	2180
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	12	-	-	STD	258	774	355	2310	9.0	-	30	1905
													40	1700
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	14	-	-	STD	258	774	355	2310	9.0	-	30	2130
													40	1900
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	18	-	-	STD	258	774	355	2310	9.0	-	30	2440
													40	2180
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	10	-	-	STD	258	774	355	2310	9.0	-	30	1735
													40	1550
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	10	111 A8	123 A8	IMP	258	774	355	2310	9.0	-	40 FR	1550
													40 DW	1090
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	12	114 A8	126 A8	IMP	258	774	355	2310	9.0	-	40 FR	1700
													40 DW	1180
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	14	118 A8	130 A8	IMP	258	774	355	2310	9.0	-	40 FR	1900
													40 DW	1320
													km/h / bar	
Ø 15.3"	10.0/75 - 15.3	TL	18	123 A8	135 A8	IMP	258	774	355	2310	9.0	-	40 FR	2180
													40 DW	1550
													km/h / bar	
Ø 15.3"	11.5/80 - 15.3	TL	10	-	-	STD	292	868	393	2578	9.0	-	30	2185
													40	1950
													km/h / bar	

Performance



Durability



Traction



Self cleaning



Comfort

STD: Standard - IMP: Implement



Ø 15.3"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	R/M		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
11.5/80 - 15.3	TL	14	-	-	STD	292	868	393	2578	9.0	-	30	4.75	
												40	2720	
												40	2430	
11.5/80 - 15.3	TL	18	-	-	STD	292	868	393	2578	9.0	-	30	6.00	
												40	3050	
												40	2725	
11.5/80 - 15.3	TL	18	130A8	143A8	IMP	292	868	393	2578	9.0	-	40 FR	6.00	
												40 DW	2725	
												40 DW	1900	
11.5/80 - 15.3	TL	10	119A8	131A8	IMP	292	868	393	2578	9.0	-	40 FR	3.40	
												40 DW	1950	
												40 DW	1360	
11.5/80 - 15.3	TL	14	126A8	139A8	IMP	292	868	393	2578	9.0	-	40 FR	4.75	
												40 DW	2430	
												40 DW	1700	
Ø 18"	10.5 - 18	TT	10	-	-	STD	270	905	415	2768	9	9 SDC	90	3.75
													40	1700
													40	1955
10.5 - 18	TL	10	-	-	STD	270	905	415	2768	9	9 SDC	90	3.75	
												40	1700	
												40	1955	
10.5 - 18	TL	12	-	-	STD	270	905	415	2768	9	9 SDC	90	4.50	
												40	1900	
												40	2190	
12.5 - 18	TT	10	-	-	STD	325	990	450	2940	11	12 SDC	90	3.00	
												40	1800	
												40	2070	
12.5 - 18	TL	10	-	-	STD	325	990	450	2940	11	12 SDC	90	3.00	
												40	1800	
												40	2070	
12.5 - 18	TT	12	-	-	STD	325	990	450	2940	11	12 SDC	90	3.50	
												40	1950	
												40	2245	
12.5 - 18	TL	12	-	-	STD	325	990	450	2940	11	12 SDC	90	3.50	
												40	1950	
												40	2245	

Performance



Durability



Traction




Self cleaning



Comfort

STD: Standard - IMP: Implement

MP 567

Ø 18"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	R/M		Load capacity (kg/tire)		
										Rec.	Alt.			
												km/h / bar		
Ø 18"	12.5 - 18	TL	16	-	STD	325	990	450	2940	11	12 SDC	90	2250	
												40	2585	
Ø 19.5"	18 - 19.5	TL	14	-	STD	460	1104	498	3280	14.00	-	90	4.50	
												50	2250	
												40	2585	
	18 - 19.5	TL	16	-	STD	460	1104	498	3280	14.00	-		90	6.00
													50	4500
													40	4700
	18 - 19.5	TL	18	-	STD	460	1104	498	3280	14.00	-		90	7.25
													50	5150
													40	5460
	18 - 19.5 IND	TL	18	165 B/167 A8	IND	460	1104	498	3280	14.00	-		90	7.25
													50	5150
													40	5460
	18 - 19.5 IND	TL	16	160 B/162 A8	IND	460	1104	498	3280	14.00	-		90	6.00
													50	4500
													40	4700
	Ø 20"	10.5 - 20	TL	10	-	STD	270	955	445	2880	9	9 SDC	90	3.75
													40	1800
													40	2070
10.5 - 20		TT	10	-	STD	270	955	445	2880	9	9 SDC		90	3.75
													40	1800
													40	2070
12.5 - 20		TL	16	-	STD	325	1040	475	3090	11.0	12 SDC		90	4.50
													40	2300
													40	2750
12.5 - 20		TT	10	-	STD	325	1040	475	3090	11.0	12 SDC		90	3.00
													40	1850
													40	2130
12.5 - 20		TL	10	-	STD	325	1040	475	3090	11.0	12 SDC		90	3.00
													40	1850
													40	2130
12.5 - 20		TT	12	-	STD	325	1040	475	3090	11.0	12 SDC		90	3.50
													40	2000
													40	2300

Performance



Durability



Traction



Self cleaning



Comfort



MP 567

Ø 20"	Tire size	TYPE	PR	LI/SS		Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	R/M		Load capacity (kg/tire)	
				Drive Wheel	Free Rolling						Rec.	Alt.	km/h / bar	
12.5 - 20	TL	12	-	-	STD	325	1040	475	3090	11.0	12 SDC	90	3.50	
												40	2000	
												40	2300	
12.5 - 20	TL	10	-	-	HD	325	1040	475	3090	11.0	12 SDC	90	3.00	
												40	1850	
												40	2130	
14.5 - 20	TL	10	-	-	STD	360	1116	495	3315	11	12 SDC	90	2.50	
												40	2000	
												40	2300	
14.5 - 20	TL	12	-	-	STD	360	1116	495	3315	11	12 SDC	90	3.00	
												40	2240	
												40	2580	
14.5 - 20	TL	14	-	-	STD	360	1116	495	3315	11	12 SDC	90	3.50	
												40	2430	
												40	2790	
14.5 - 20	TL	16	-	-	STD	360	1116	495	3315	11	12 SDC	90	4.00	
												40	2575	
												40	2960	
14.5 - 20	TL	18	-	-	STD	360	1116	495	3315	11	12 SDC	90	4.50	
												40	2725	
												40	3135	
14.5 - 20	TL	14	-	-	HD	360	1116	495	3315	11	12 SDC	90	3.50	
												40	2430	
												40	2790	
16.0/70 - 20 (405/70 - 20)	TL	14	-	-	STD	405	1128	490	3350	13 SDC	12	90	3.50	
												40	2900	
												40	3340	
16.0/70 - 20 (405/70 - 20)	TT	14	-	-	STD	405	1128	490	3350	13 SDC	12	90	3.50	
												40	2900	
												40	3340	

STD: Standard - HD: Heavy Duty

Performance



Durability



Traction



Self cleaning



Comfort



UNIVERSAL
VEHICLE
MULTIPURPOSE

Bias

MP 585



MP 585 is an agro-industrial tire, which is suitable for multi-purpose vehicles in municipality/maintenance applications. This tire is specially engineered with a block pattern that offers maximum stability and durability in the most difficult working conditions, also at high speeds.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
10.5 - 20	TL	10	-	STD	273	970	455	2890	9	9 SDC	3.75		
											90	1800	
											50	2000	
12.5 - 20	TL	12	-	STD	335	1050	480	3130	11	12 SDC	3.50		
											90	2000	
											50	2240	
6.50 - 20	TT	10	106 A6	STD	200	875	-	-	5.50 F	4.00 E; 5.00 F	5.50		
											30	950	

STD: Standard

Technology



Block pattern



High Speed

Performance



Stability



Durability







UNIVERSAL
VEHICLE
MULTIPURPOSE

 Bias

MP 590



MP 590 is an agro-industrial tire suitable for loading operations with telehandlers and forklifts. This tire provides good traction and excellent stability as well as increased durability.

Ø 22.5"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
18 - 22.5 (445/65 - 22.5)	TL	16	-	-	STD	480	1190	530	3534	14.0	-	40 DW	4875
												30 DW	5450
18 - 22.5 (445/65 - 22.5)	TL	20	-	-	STD	480	1190	530	3534	14.0	-	40 DW	5800
												30 DW	6500

STD: Standard

Performance



Stability



Traction



Durability





UNIVERSAL
VEHICLE
MULTIPURPOSE

Bias

MP 600



MP 600 is an agro-industrial tire, suitable for municipality/maintenance operations with telehandlers and implement machinery, providing a comfortable driving experience. This tire provides good traction and excellent self-cleaning properties along with an extended product life-cycle.

Ø 18"	Tire size	TYPE	PR	LI/SS Drive Wheel	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.		
												km/h / bar	
Ø 18"	10.5 - 18	TL	10	-	STD	272	920	420	2740	9	9 SDC	40 DW	1950
												50 DW	1900
												km/h / bar	3.75
	12.5 - 18	TL	10	-	STD	308	990	450	2950	11	12 SDC	40 DW	2060
												50 DW	2000
												km/h / bar	3.00
12.5 - 18	TL	12	-	STD	308	990	450	2950	11	12 SDC	40 DW	2300	
											50 DW	2240	
											km/h / bar	3.50	
Ø 20"	400/70 - 20 (16.0/70 - 20)	TL	14	-	STD	405	1085	-	-	13 SDC	12	40 DW	3550
												50 DW	3250
												km/h / bar	4.00
Ø 24"	400/70 - 24 (16.0/70 - 24)	TL	14	-	STD	405	1185	545	3530	13 SDC	12	40 DW	3650
												50 DW	3550
												km/h / bar	3.50
	400/70 - 24 (16.0/70 - 24)	TL	10	-	STD	405	1185	545	3530	13 SDC	12	40 DW	2975
												50 DW	2900
												km/h / bar	2.50
	400/70 - 24 (16.0/70 - 24)	TL	18	158A8	STD	405	1185	545	3530	13 SDC	12	40 DW	4250
												50 DW	4125
												km/h / bar	4.50
	400/70 - 24 (16.0/70 - 24)	TL	14	-	SPL	405	1185	545	3530	13 SDC	12	40 DW	3650
												50 DW	3550
												km/h / bar	3.50

STD: Standard - SPL: Special

Performance



Durability



Traction



Self cleaning



Comfort





UNIVERSAL
VEHICLE
MULTIPURPOSE

 Bias

MT 612



MT 612 has been specially designed for multipurpose use on and off the road. Its strong casing allows carrying heavy loads at high speed whereas its broad lugs provide outstanding traction. The extra tread width ensures excellent flotation on sand and mud.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
14.00 - 20	TT	18	-	STD	390	1265	594	3827	10	-		6.60	
												80 LS	4500
												80 LD	4000
14.00 - 20	TT	22	-	STD	390	1265	594	3827	10	-		8.60	
												80 LS	5300
												80 LD	4750
14.00 - 20	TT	20	-	STD	390	1265	594	3827	10	-		7.60	
												80 LS	4875
												80 LD	4375
16.0/70 - 20	TT	16	147 F	STD	408	1100	520	3327	13.00 T	-		4.50	
												80 LS	3075
												80 LD	2725

Performance



Durability



For Muddy
Ground



Traction

STD: Standard



MOBILE CRANE





MOBILE
CRANE

Radial

AIROMAX AM 27



AIROMAX AM 27 is the ideal road-oriented tire for construction applications with cranes. It features extraordinary heat resistance and outstanding riding comfort. AIROMAX AM 27 is a high-speed tire particularly suitable for all operations requiring a high level of handling.

AIROMAX
RADIAL CRANE TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)							
										Rec.	Alt.	km/h / bar	9.0						
Ø 24"	385/95 R 24 (14.00 R 24)	TT	-	170 F	STD	372	1363	626	4175	10.00 W	-	80	6000						
Ø 25"	385/95 R 25 (14.00 R 25)	TL	-	170 F	STD	372	1363	626	4175	10.00/1.5	-	80	6000						
445/95 R 25 (16.00 R 25)	TL	-	174 F	STD	440	1490	695	4587	11.25/2.0	11.00/ 1.7 CR; 11.00/1.7 CRL		80	6300						
												90	6300						
												100	5600						
												30	8500						
												40	7750						
												50	7500						
												60	7300						
												70	7100						
505/95 R 25 (18.00 R 25)	TL	-	186 E	STD	492	1600	728	4900	13.00/2.5	-		80	6650						
												90	6650						
												100	5700						
												30	12350						
												40	11800						
												50	11200						
												60	10650						
												70	9500						
525/80 R 25 (20.5 R 25)	TL	-	176 F	STD	530	1481	681	4534	17.00/2.0	17.00/1.7 CR		5.25	5.50	5.75	6.00	6.25	6.50	6.75	7.00
												80	5600	5800	6000	6300	6500	6700	6900

Technologies



Performance



STD: Standard



MOBILE
CRANE

Radial

AIROMAX AM 543



AIROMAX AM 543 is the ideal tire for construction applications with cranes. It shows outstanding traction and high stability. As crane tires are subject to particular stress and extreme usage conditions, AIROMAX AM 543 has been designed for providing excellent heat resistance. Besides, it is suitable for all operations requiring a high level of handling.

AIROMAX
RADIAL CRANE TIRES

Ø 24"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
385/95 R 24 (14.00 R 24)	TT	-	170 E	STD	375	1355	627	4156	10.00 W	-		9.00	
												70	6000
385/95 R 25 (14.00 R 25)	TL	-	170 E	STD	375	1355	627	4156	10.00/1.5	-		9.00	
												70	6000
445/95 R 25 (16.00 R 25)	TL	-	177 E	STD	435	1480	670	4502	11.25/2.0	11.00/ 1.7 CR ; 11.00/ 1.7 CRL		9.00	
												30	9500
												40	9000
												50	8500
												60	8175
												70	7300
												80	6000
												90	5150
100	4375												

Technologies



All Steel

Performance



Traction



High Load Capacity

STD: Standard







MOBILE
CRANE

 Bias



CRANE SPECIAL

CRANE SPECIAL is suitable for pick & carry cranes on rough terrains. The tire is made of a special compound which provides high stability and durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	5.75
														
14.00 - 24	TT	24	-	STD	375	1368	628	4050	10.00 W	-		50	5150	
14.00 - 24	TL	24	-	STD	375	1368	628	4050	10.00 W	-		50	5150	
Ø 25"	16.00 - 25	TT	28	-	STD	463	1485	682	4395	11.25/2.0	-		50	6700
	16.00 - 25	TL	28	-	STD	463	1485	682	4395	11.25/2.0	-		50	6700
	18.00 - 25	TL	32	-	STD	510	1615	739	4780	13.00/2.5	15.00/2.5		50	8750

STD: Standard

Performance



Stability





MOBILE
CRANE

 Bias

RM 2002



RM 2002 is suitable for transport operations with trailers and light trucks, both on and off the road. It ensures long durability and top performance along the entire product life-cycle. Its "industrial" version is ideal for pick & carry cranes.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)		
										Rec.	Alt.	km/h / bar		
														
11.00 - 20	TT	16	-	-	STD	302	1101	-	-	8.0	7.5;8.5	7.95	7.25	
												100 LS	3250	-
												100 LD	-	2900
11.00 - 20	TT	18	-	-	STD	302	1101	-	-	8.0	7.5;8.5	8.25	7.60	
												100 LS	3350	-
												100 LD	-	3000
11.00 - 20	TT	18	-	-	IND	302	1101	-	-	8.0	7.5;8.5	8.25	7.60	
												100 LS	3350	-
												100 LD	-	3000
11.00 - 20	TT	16	-	-	IND	302	1101	-	-	8.0	7.5;8.5	7.95	7.25	
												100 LS	3250	-
												100 LD	-	2900

Performance



Durability

STD: Standard - IND: Industrial



RTG CRANE





RTG
CRANE

Bias

XL GRIP (IND-3)



XL GRIP (IND-3) is a bias-ply tire for RTG cranes in stacking and lifting applications. The tire features a strong casing made of a specially formulated tread compound, which provides an extended tire life-cycle.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)		
										Rec.	Alt.		km/h / bar		
16.00 - 25	TL	32	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0		10	10.00	16875	
18.00 - 25	TL	40	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5		10	10.00	22950	
18.00 - 25	TL	32	-	IND	510	1615	739	4780	13.00/2.5	15.00/2.5		10	9.00	20250	
												25		18750	
21.00 - 25	TL	32	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0		10	7.80	24000	
21.00 - 25	TL	36	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0		10	8.70	25650	
21.00 - 25	TL	40	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0		10	9.90	27810	
21.00 - 25	TL	44	-	IND	576	1750	789	5185	15.00/3.0	17.00/3.0		10	10.00	29160	
Ø 29"	24.00 - 29	TL	42	-	IND	656	1994	900	5860	17.00/3.5	-		10	9.00	36260
													25		33575
Ø 35"	21.00-35	TL	36	-	IND	580	2020	928	5980	15.00/3.0	-		10	9.00	31000

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance

IND: Industrial





XL GRIP (IND-3)

Ø 35"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
21.00 - 35	TL	40	-	IND	580	2020	928	5980	15.00/3.0	-		10	9.90	32800
24.00 - 35	TL	48	-	IND	655	2130	975	6302	17.00/3.5	-		10	10.00	42525

IND: Industrial

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance





EMPTY CONTAINER HANDLER





EMPTY
CONTAINER
HANDLER

Bias

EM 937 (IND-3)



EM 937 (E-3) IND is specially designed for empty-container-handling operations in stacking and loading applications. It features excellent durability and a long tire life. EM 937 (E-3) IND is ideal on paved surfaces and for all operations requiring a high level of handling in the port.

*For size 14.00-24 please confirm service rim or consult manufacturer/distributor.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
14.00 - 24	TT	28	-	PORT IND	375	1368	628	4050	10.00 W	-		10	13500	
14.00 - 24	TL	28	-	PORT IND	375	1368	628	4050	10.00 W	-		10	13500	
14.00 - 24	TL	28	-	PORT IND	375	1368	628	4050	10.00 WA	10.00 VA		10	13500	

PORT IND: Port Industrial

Technologies



Heavy Duty

Performance



Handling & Comfort



Stability



Durability



Cut and Chip Resistance





Hard Surfaces

XL GRIP (IND-3)



XL GRIP (IND-3) is a bias-ply tire for empty container handlers in stacking and lifting applications. The tire features a strong casing, which provides great durability and as well as a high stability in lift mode.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.00 - 24	TT	24	-	IND	320	1250	585	3710	8.5	8.0		10.00		
												10	10270	
Ø 25"	16.00 - 25	TL	28	-	IND	465	1485	682	4395	11.25/2.0	13.00/2.0		9.00	
													10	15525
18.00 - 25	TL	32	-	PORT IND	510	1615	739	4780	13.00/2.5	15.00/2.5		9.00		
												10	20250	
												25	18750	
18.00 - 25	TL	40	-	PORT IND	510	1615	739	4780	13.00/2.5	15.00/2.5		10.00		
												10	22950	

IND: Industrial - PORT IND: Port Industrial

Technologies



Heavy Duty

Performance



Stability



Durability



Hard Surfaces





Cut and Chip Resistance

ROCK GRIP IND-4 (ECH)



ROCK GRIP PORT INDUSTRIAL IND-4 (ECH) is a bias-ply tire designed for Empty container handler in several applications including industrial handling and steelworks. The special ROCK GRIP compound ensure particular heat resistance along with great stability and durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.00 - 24	TT	20	-	PORT IND	315	1265	595	3755	8.5	8.0		10	9315	
												10	9315	
12.00 - 24	TT	24	-	PORT IND	315	1265	595	3755	8.5	8.0		10	10270	
												10	10270	
14.00 - 24	TL	32	-	PORT IND	375	1410	647	4173	10.00 WA	10.00 VA		10	14175	
												10	14175	
14.00 - 24	TL	24	-	PORT IND	375	1410	647	4173	10.00 W	-		10	12825	
												10	12825	
14.00 - 24	TL	28	-	PORT IND	375	1410	647	4173	10.00 W	-		10	13500	
												10	13500	
14.00 - 24	TL	32	-	PORT IND	375	1410	647	4173	10.00 W	-		10	14175	
												10	14175	
14.00 - 24	TL	28	-	PORT IND	375	1410	647	4173	10.00 WA	10.00 VA		10	13500	
												10	13500	
Ø 25"	16.00 - 25	TL	32	-	PORT IND	470	1525	699	4514	11.25/2.0	13.00/2.0		10	16875
													10	16875
16.00 - 25	TL	36	-	PORT IND	470	1525	699	4514	11.25/2.0	13.00/2.0		10	18360	
												10	18360	

Technologies



Performance



PORT IND: Port Industrial

ROCK STAR (IND-4)



ROCK STAR PORT IND-4 has been specifically designed for empty container handlers and forklifts. In addition to excellent traction, the unique tread compound provides superior cut and chip resistance. ROCK STAR PORT IND-4 ensures outstanding load capacity and extraordinary durability.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
										km/h / bar		
14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10.00 14175	
14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 W	-	10.00 14175	
14.00 - 24	TT	32	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10.00 14175	
14.00 - 24	TL	32	-	PORT IND	390	1425	635	4350	10.00 W	-	10.00 14175	
14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 W	-	10.00 13500	
14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 W	-	10.00 13500	
14.00 - 24	TT	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10.00 13500	
14.00 - 24	TL	28	-	PORT IND	390	1425	635	4350	10.00 WA	10.00 VA	10.00 13500	

Performance





PORT IND: Port Industrial

POWER TRAX HD



POWER TRAX HD premium tire is specially designed for equipment in port and underground mining applications. Its deep tread, the extra thick sidewall and the tough casing provide exceptional durability minimizing the risk of punctures and accidental damages. The tire features excellent cut and chip resistance, which is particularly suitable for rough and hard surfaces. The specially designed rim guard ensures protection against flats and wheel damage in the rim flange area.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
														
12.00 - 20	TT	20	-	-	STD	320	1150	-	-	8.50	9.0		km/h / bar	10.00
													25 LOAD WHEEL	9230
													25 STEER WHEEL	7100
													10 OTHER VEHICLES	9230
													25 OTHER VEHICLES	7100
													STATIC SIDE LOADER	10720
12.00 - 20	TT	28	-	-	STD	320	1150	-	-	8.50	9.0		km/h / bar	10.00
													25 LOAD WHEEL	9490
													25 STEER WHEEL	7300
													10 OTHER VEHICLES	9490
													25 OTHER VEHICLES	7300
													STATIC SIDE LOADER	11025
12.00 - 20	TT	20	172A8	IMP	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												40	6300	
12.00 - 20	TT	28	173A8	IMP	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												40	6500	

STD: Standard - IMP: Implement

Technologies



Heavy Duty



Extra Deep Tread

Performance



Durability



Stability



Cut and Chip Resistance



EMPTY
CONTAINER
HANDLER

Bias

POWER TRAX HD SMOOTH



POWER TRAX HD SMOOTH is a bias-ply tire specially designed for port and underground mining operations. The special sidewall protection along with a solid tread prevents cut and puncture damages that are common in such demanding environments. When you need to move heavy-duty loads, POWER TRAX HD SMOOTH is your ideal partner.

Ø 20"	Tire size	TYPE	PR	LI/SS	Version	S.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
12.00 - 20	TT	20	-	STD	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												25 LOAD WHEEL	9230	
												25 STEER WHEEL	7100	
												10 OTHER VEHICLES	9230	
												25 OTHER VEHICLES	7100	
STATIC SIDE LOADER	10720													
12.00 - 20	TT	28	-	STD	320	1150	-	-	8.50	9.0		km/h / bar	10.00	
												25 LOAD WHEEL	9490	
												25 STEER WHEEL	7300	
												10 OTHER VEHICLES	9490	
												25 OTHER VEHICLES	7300	
STATIC SIDE LOADER	11025													

STD: Standard

Technologies



Performance



REACH STACKER





Radial

PORTMAX PM 90



PORTMAX PM 90 has been specially designed for reach stackers in several applications including industrial handling and steelworks. It is an All Steel radial tire that provides great durability and stability. Its special antistatic tread compound ensures particular heat resistance and an extended tire life-cycle. PORTMAX PM 90 offers reduced rolling resistance improving fuel economy.

PORTMAX
RADIAL PORT TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	18.00 R 25	TL	***	207 A5	IND	495	1655	730	5024	13.00/2.5	-		25	17500
	18.00 R 33	TL	***	214 A5	IND	485	1845	857	5624	13.00/2.5	13.00/2.50 IF		25	21200

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability



Heat Resistance



Fuel Economy

ROCK GRIP IND4 (RS)



ROCK GRIP PORT INDUSTRIAL (IND-4) is a bias-ply tire designed for reach stackers in several applications including industrial handling and steelworks. The special ROCK GRIP compounds ensure particular heat resistance along with great stability and durability.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
	18.00 - 25	TL	40	-	PORT IND	510	1650	753	4885	13.00/2.5	15.00/2.5	10	22950
	18.00 - 33	TL	44	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	27810
	18.00 - 33	TL	36	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	24975
	18.00 - 33	TL	40	-	PORT IND	510	1887	869	5586	13.00/2.5	-	10	27000

Technologies




Performance



PORT IND: Port Industrial



SM 54 (L-4S)



SM 54 (L-4S) has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. It features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance to ensure an extended tire life-cycle. *The picture in the gallery below refers to size 18.00-25 only.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
										km/h / bar		
16.00 - 25	TL	28	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	9.00	
											10	15525
16.00 - 25	TL	32	-	IND	430	1470	676	4354	11.25/2.0	13.00/2.0	10.00	
											10	16875
18.00 - 25	TL	40	-	IND	528	1650	750	4880	13.00/2.5	15.00/2.5	10.00	
											10	22950
Ø 33"	18.00 - 33	TL	36	-	PORT IND	535	1895	840	5609	13.00/2.5	-	10.00
												10
18.00 - 33	TL	40	-	PORT IND	535	1895	840	5609	13.00/2.5	-	10.00	
											10	26655

IND: Industrial - PORT IND: Port Industrial

Technologies



Heavy Duty

Performance



Cut and Chip Resistance



Durability



Stability



Hard Surfaces

SM 54 M (L-4S)



SM 54 M (L-4S) is a modified version of the SM 54 pattern. The flatter tread profile results in a large contact area ensuring a longer tire life-cycle. This tire has been specially designed for empty container handlers and reach stackers in intermodal/logistics applications. SM 54 M features high stability in lift mode as well as a deep and smooth tread design, providing excellent cut resistance.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)
										Rec.	Alt.		
18.00 - 25	TL	40	-	IND	528	1650	750	4880	13.00/2.5	15.00/2.5	10	10.00	22950

IND: Industrial

Technologies



Deep Tread

Performance



Stability



Durability



Cut and Chip Resistance



CONTAINER KING



CONTAINER KING has been designed for reach stackers in intermodal transport and logistics applications. This extraordinary tire is made of a highly wear-and-tear-resistant tread compound which minimizes tread cracks. CONTAINER KING ensures an extended tire life-cycle plus exceptional stability in lift mode.

CONTAINER KING
P O R T T I R E S

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
	18.00 - 25	TL	40	-	IND	528	1675	765	4955	13.00/2.5	15.00/2.5	10	22950
	18.00 - 33	TL	40	-	IND	510	1895	-	-	13.00/2.5	-	10	27000

Performance



Stability



Durability



IND: Industrial



PORT KING PLUS



PORT KING PLUS has been specially designed for reach stackers in intermodal/logistics applications. Its deep tread with sturdy lugs along with the special compound provides an extended tire life-cycle. It is also available with a Groove Crack Resistant tread Compound (GCRC).

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		km/h / bar	Load capacity (kg/tire)	
										Rec.	Alt.		10.00	22950
														
18.00 - 25	TL	40	-	GCRC	528	1675	765	4955	13.00 / 2.5	15.00 / 2.5	10	10.00	22950	

GCRC: Groove Crack Resistance Compound

Technologies



Performance



Durability








Deep Tread



PORT KING CLASSIC



PORT KING CLASSIC is BKT's latest-generation port tire, which has been specially engineered for container handling equipment. The tire ensures maximum operating efficiency and exceptional stability in lift mode. Thanks to its strong nylon casing, PORT KING CLASSIC stands out for higher load capacity minimizing the risk of impact breaks, snags, and punctures. The new wear-resistant compound has been developed to ensure an extended product life-cycle, and to provide the best return on investment.

Ø 25"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)
										Rec.	Alt.	
												
										13.00 / 2.5	15.00 / 2.5	10.00
	18.00 - 25	TL	40	-	IND	528	1675	765	4955	10		22950

IND: Industrial

Technologies







Performance



SM 55 (L-5S) (IND-5)



SM 55 (L-5S) (IND-5) has been specially designed for reach stackers and container handlers. Its special abrasion-resistant tread compound provides an extended tire life on asphalt or concrete surfaces and offers excellent stability to vehicles in lift mode.

Ø 24"	Tire size	TYPE	PR	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	
	12.00 - 24	TT	20	-	PORT IND					8.5	7.33 V; 8; 8.00 V; 8.50 V		9.90	9315
	18.00 - 25	TL	40	-	PORT SPL					13.00/2.5	15.00/2.5		10.00	22950

PORT IND: Port Industrial - PORT SPL: Port Special

Technologies



Extra Deep Tread



Heavy Duty

Performance



Stability



Durability



Hard Surfaces



Cut and Chip Resistance



STRADDLE CARRIER





STRADDLE CARRIER

Radial

PORTMAX PM 93 PLUS



PORTMAX PM 93 PLUS has been specially designed for straddle carriers in port container handling operations. It is an All Steel radial tire with multilayer steel belts providing a greater stability and durability. Its special antistatic tread compound ensures a particular heat resistance and a longer tire life. PORTMAX PM 93 PLUS offers reduced rolling resistance improving fuel economy.

PORTMAX
RADIAL PORT TIRES

Ø 25"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	10.00
16.00 R 25	TL	**	200A5	IND	425	1515	699	4582	11.25/2.0	-	25	14000	

IND: Industrial

Technologies



Special Antistatic Compound

Performance



Stability



Durability



Heat Resistance



Fuel Economy



TERMINAL TRACTOR




PORTMAX PT 93



PORTMAX PT 93 is a terminal tractor and trailer tire, which has been specifically engineered for heavy-duty operations in terminal environments such as ports and logistic hubs. The special antistatic tread compound ensures excellent wear and heat resistance even under the most demanding operating conditions. PORTMAX PT 93 offers excellent handling features and outstanding grip along with enhanced durability.



Ø 22.5"	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM		Load capacity (kg/tire)	
										Rec.	Alt.	km/h / bar	
													
280/75 R 22.5	TL	-	168 A8	IND	282	998	-	-	8.25	9.00	40	5600	
310/80 R 22.5	TL	-	175 A8	IND	308	1070	-	-	9.00	-	40	6900	

Technologies



Special Antistatic Compound

Performance



Durability



Comfort



Heat Resistance

IND: Industrial



TOWTRACTOR



LIFTMAX LM 63



LIFTMAX LM 63 has been specially developed for industrial and logistics operations. The 3-rib tread design provides low rolling resistance with good wet grip and uniform tread wear with better handling. It is an All Steel radial tire with multilayer steel belts offering lower vibration as well as enhanced stability and comfort.

Ø	Tire size	TYPE	STAR RATING	LI/SS	Version	O.W. (mm)	O.D. (mm)	SLR (mm)	RC (mm)	RIM			Load capacity (kg/tire)	
										Rec.	Alt.		km/h / bar	10.00
8"	180/70 R 8 (18 X 7 R 8)	TL	-	125 A5	STD	170	460	-	-	4.33R	-		25	1650
9"	6.00 R 9	TL	-	121 A5	STD	160	542	-	-	4.00 E	-		10.00	
													25	1450
10"	6.50 R 10	TL	-	128 A5	STD	176	592	-	-	5.00 F; 5.50 F	-		10.00	
													25	1800
12"	7.00 R 12	TL	-	136 A5	STD	195	675	-	-	5.00 S	-		10.00	
													25	2240
15"	7.00 R 15	TL	-	143 A5	STD	198	738	-	-	5.50	5.00		10.00	
													25	2725
	8.25 R 15	TL	-	153 A5	STD	240	844	-	-	6.5	7.0		10.00	
													25	3650

STD: Standard

Technologies



Performance





Application chart

CONSTRUCTION

BACKHOE LOADER		COMPACT LOADER		LOADER		COMPACTOR	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
MULTIMAX MP 522	100	MULTIMAX MP 522	154	EARTHMAX SR 22	190	PAC MASTER	226
RT 747 AGRO INDUSTRIAL	106	RT 747 AGRO INDUSTRIAL	160	EARTHMAX SR 25 PLUS	192	PAC MASTER PLUS	230
BK 826	108	AT 603	162	EARTHMAX SR 31	194	TR 387	232
TR 461	112	AT 621	166	GR 288	196	TR 387 IND	238
MP 570	114	AT 625	174	EM 936 LOADER SPECIAL	198	TR 390	240
AT 603	116	CON STAR	176	EM 937	200	TR 390 IND	242
AT 621	120	MP 570	180	LOADER PLUS (L-3)	204	TR 391	244
AT 625	128	MP 590	182	BK-LOADER 53	208		
BK 6060	130	MP 600	184	ROCK GRIP	210		
CON STAR	132	SNOW RIDE (A)	186	XL GRIP	212		
EM 937 (L)	136			SNOW RIDE (B)	218		
TR 459	140			SNOW RIDE PLUS	220		
TR 463	146			ROCK STAR (L-4)	222		
XL GRIP	148						

EXCAVATOR		GRADER		SKID STEER		MOBILE CRANE	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
EM 934	248	EARTHMAX SR 22	268	GIANT TRAX	274	AIROMAX AM 27	496
EM 936	250	EARTHMAX SR 25 PLUS	270	MUD POWER HD	276	AIROMAX AM 543	498
EM 936 SUPER	254			JUMBO TRAX HD	278	CRANE SPECIAL	500
EM 938	256			POWER TRAX HD (SS)	280	RM 2002	502
EM 939	258			SKID POWER	282		
TR 678	260			SKID POWER (CHEVRON)	286		
TR 678 IND	262			SKID POWER HD	288		
MP 570	264			SKID POWER SK	298		
				SKID POWER PLUS	300		
				SNOW RIDE (A)	302		
				SURE TRAX HD	304		

- RADIAL TIRES
- BIAS TIRES



Application chart

INDUSTRIAL HANDLING



FORKLIFT

TIRE	PAGE
LIFTMAX LM 81	40
FL 252	44
MP 590	46
PL 801	48
POWER TRAX HD	58
POWER TRAX HD SMOOTH	66
SNOW GRIP	68
SUPER TRAX HD	70
MAGLIFT	72
MAGLIFT ECO	88
MAGLIFT PREMIUM	94
MAGLIFT ECO RIB	96

- RADIAL TIRES
- BIAS TIRES
- SOLID TIRES

AGRO-INDUSTRIAL



TELEHANDLER

TIRE	PAGE
MULTIMAX MP 522	308
MULTIMAX MP 527	314
MULTIMAX MP 529	320
RT 747 AGRO INDUSTRIAL	322
AS 504	324
CON STAR	376
GRIP STAR	380
LIFT STAR PLUS	382
MP 567	384
MP 590	396
MP 600	398
TR 461	402



Application chart

TRANSPORT

LIGHT TRUCK		LOW PLATFORM		TRAILER		MILITARY TRUCK		UNIVERSAL VEHICLE MULTIPURPOSE	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
LT TR 182	406	IT 400	412	LIFTMAX LM 63	420	MT 612	464	EARTHMAX SR 33	470
TUF LUG	408	LP 450	416	PORTMAX PT 93	422	MT 617	466	EARTHMAX SR 33 PLUS	472
				BK 6060	424			MULTIMAX MP 513	474
				CON TRAILER	426			MULTIMAX MP 540	476
				FLOTATION TR 675	428			MP 567	478
				INDUSTRIAL RIB F3	432			MP 585	486
				MULTI RIB	434			MP 590	488
				RIB F3	436			MP 600	490
				SAND KING	438			MT 612	492
				SAND MASTER	440				
				SAND STAR	442				
				SUPER SAND	444				
				TUF LUG	446				
				RIB 324	448				
				BK 826	450				
				COLT	454				
				TR 387 IND	456				
				TR 678	458				
				TR 678 IND	460				

■ RADIAL TIRES
■ BIAS TIRES

PORT

STRADDLE CARRIER		TERMINAL TRACTOR		TOW TRACTOR	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
PORTMAX PM 93 PLUS	544	PORTMAX PT 93	548	LIFTMAX LM 63	552

RTG CRANE		EMPTY CONTAINER HANDLER		REACH STACKER	
TIRE	PAGE	TIRE	PAGE	TIRE	PAGE
XL GRIP (IND-3)	506	EM 937 (IND-3)	512	PORTMAX PM 90	526
		XL GRIP (IND-3)	514	ROCK GRIP IND4 (RS)	528
		ROCK GRIP IND-4 (ECH)	516	SM 54 (L4-S)	530
		ROCK STAR (IND-4)	518	SM 54 M	532
		POWER TRAX HD	520	CONTAINER KING	534
		POWER TRAX HD SMOOTH	522	PORT KING PLUS	536
				PORT KING CLASSIC	538
				SM 55 (L5-S) (IND-5)	540



Load index

Load Index & Speed Symbol

LI	kg	LI	kg	LI	kg	LI	kg
50	190	85	515	120	1400	155	3875
51	195	86	530	121	1450	156	4000
52	200	87	545	122	1500	157	4125
53	206	88	560	123	1550	158	4250
54	212	89	580	124	1600	159	4375
55	218	90	600	125	1650	160	4500
56	224	91	615	126	1700	161	4625
57	230	92	630	127	1750	162	4750
58	236	93	650	128	1800	163	4875
59	243	94	670	129	1850	164	5000
60	250	95	690	130	1900	165	5150
61	257	96	710	131	1950	166	5300
62	265	97	730	132	2000	167	5450
63	272	98	750	133	2060	168	5600
64	280	99	775	134	2120	169	5800
65	290	100	800	135	2180	170	6000
66	300	101	825	136	2240	171	6150
67	307	102	850	137	2300	172	6300
68	315	103	875	138	2360	173	6500
69	325	104	900	139	2430	174	6700
70	335	105	925	140	2500	175	6900
71	345	106	950	141	2575	176	7100
72	355	107	975	142	2650	177	7300
73	365	108	1000	143	2725	178	7500
74	375	109	1030	144	2800	179	7750
75	387	110	1060	145	2900	180	8000
76	400	111	1090	146	3000	181	8250
77	412	112	1120	147	3075	182	8500
78	425	113	1150	148	3150	183	8750
79	437	114	1180	149	3250	184	9000
80	450	115	1215	150	3350	185	9250
81	462	116	1250	151	3450	186	9500
82	475	117	1285	152	3550	187	9750
83	487	118	1320	153	3650	188	10000
84	500	119	1360	154	3750	189	10300

LI	kg	LI	kg	LI	kg
190	10600	200	14000	210	19000
191	10900	201	14500	211	19500
192	11200	202	15000	212	20000
193	11500	203	15500	213	20600
194	11800	204	16000	214	21200
195	12150	205	16500	215	21800
196	12500	206	17000	216	22400
197	12850	207	17500	217	23000
198	13200	208	18000	218	23600
199	13600	209	18500	219	24300

SPEED SYMBOL

Speed symbol	A2	A4	A6	A8	B	C	D	E	F	G	J	K
Km/h	10	20	30	40	50	60	65	70	80	90	100	110



Tread design



Traction pattern

Used in construction and farm areas for industrial applications, on soft soils and loose grounds where traction is required.



Block pattern

Large supporting surface, good wear and protection. Good traction on soft soils.



Smooth pattern

High stability and long life. Used in severe conditions, hard soils. Very high resistance to damages. Typical use on compactors or heavy industrial machines.



Solid tire

Very closed pattern for improved wear and stability. Used in warehouses and logistic areas.



Rib pattern

Low rolling resistance and wear. Optimal performances on road transfer and port areas.



Semi smooth pattern

High protection against cuts and tears. Good traction on hard surfaces and best stability during lifting mode. Used in port and logistic areas.





Tire construction



Bias tires

Very stiff carcass suggested when high stability is required. Preferred on small machines used in construction areas and big material handling machines.

Bias tires have cord plies that are arranged running diagonally from bead to bead across the tire. Layers overlap forming a crisscross pattern. This design features extraordinary sidewall resistance, puncture resistance and high load capacity.



Radial tires

Suggested when the machine covers high distances. Wider footprint area guarantees better wear, traction and lower rolling resistance with a better fuel consumption compared to Bias tires. Radial tire structure helps heat dissipation on heavy operations and protects against punctures. Better comfort during operation.

Radial tires have cord plies that are arranged running radially from bead to bead around the tire. Sidewall and tread have independent functional features providing more flexibility, great performance, durability, and fuel economy.





Tire markings

READING YOUR TIRE

This section is intended for operators from the agricultural, industrial or earthmoving sectors. It contains useful information about specific Off-Highway tire features as well as some recommendations for maintenance and storage.

The main information about your tire can be found right on the tire. You just need to know how to read it.



- 1. Sub brand name
- 2. Type of compound
- 3. TRA Code
- 4. Safety warning
- 5. Tire size

- 6. Ply rating, Load & speed index, Load, speed, pressure details
- 7. Type of tire
- 8. Tire serial code
- 9. Cord fabric
- 10. Brand Name

These are the main parameters for measuring a tire:

OD - OVERALL DIAMETER

This parameter is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

LOAD INDEX

The load index is a numeric code that defines the tire's maximum loading capacity in kg. For each tire type/size, the loading capacity is always related to a specific inflation pressure as defined by ETRTO standards and manufacturer specifications.

SW - SECTION WIDTH

This parameter indicates the outer sidewall distance without taking into consideration the prominences due to tire code marking. The section width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SPEED CODE

The speed code is a symbol that indicates the maximum speed admitted at the given load index, following any other specific conditions defined by the tire manufacturer.

OW - OVERALL WIDTH

This parameter indicates a tire's section width at its largest point including all prominences such as tire code marking, sidewall lettering, tire brand, etc. The overall width is measured after the tire being properly mounted on the reference rim and inflated at the pressure recommended by the manufacturer for at least 24 hours without any load.

SH - SECTION HEIGHT


This parameter indicates the vertical section of the tire. It is calculated based on the overall diameter less the rim diameter divided by two.

SLR - STATIC LOADED RADIUS

This parameter indicates the vertical distance between the ground and the tire rotation axis. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

SLW - STATIC LOADED WIDTH

This parameter indicates the outer distance between the tire sidewalls. It is measured with the tire inflated at its nominal pressure, properly mounted on its reference rim at maximum load according to the values defined in the load index.

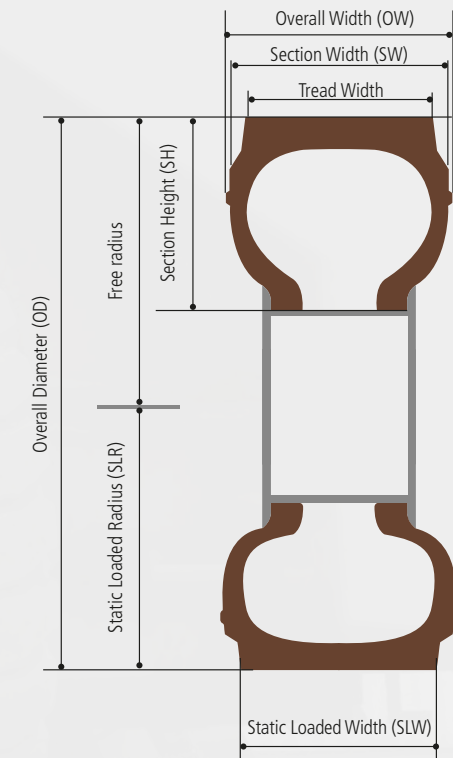



Tire transportation & storage

TIRE TRANSPORTATION

BKT tires are designed for the most differing applications in agriculture and manifold industrial sectors. Many Off-Highway tires are very heavy and difficult to be transported. Wrong transportation of a tire can cause serious damage. When transporting a tire, particular attention must be paid to make sure that neither the bead nor the inner part of the tire are damaged. Even the slightest damage of the bead can cause permanent damage due to air leakage resulting in tire underinflation and possible separation of the tire components.


In order to reduce the risk of damages or problems caused by wrong tire transportation or handling to a minimum, it is highly advised to observe the following recommendations:

Do not lift the tire with a crane hook by leverage on the bead.

Use large fibered straps, rubber slings or specific belts.


Do not use ropes, steel slings or chains.

Use a forklift for transport. The tire is to be lifted under the tread and not on the bead.

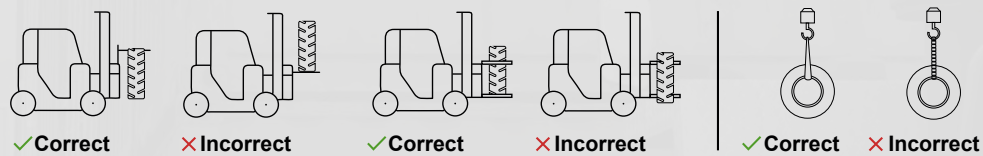

TIRE STORAGE

Whatever your field of application is – agriculture, earthmoving, industry, or else - Off-Highway tires are to be stored in a cool and dry place, away from direct sunlight, electric motors, oils, fuels, resins and other volatile substances in order to avoid any alteration of the chemical-physical features. Should this not be possible, at least protect your tires with a waterproof tarpaulin to avoid contact with ultra-violet rays and bad weather. Tires are to be placed vertically side by side. Do not stack one tire over the other horizontally. Tubes and o-rings must be stocked in their original packing or stored unwrapped on racks or shelves, but never suspended.

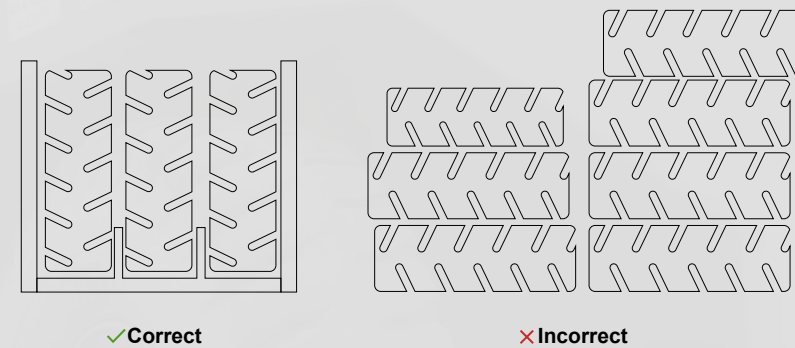



Sustainability

What are end-of-life tires (ELTs)?

ELTs are tires that have reached the end of their product life-cycle. They are worn-out, cracked or bursted tires, which cannot be retreaded and are no longer suitable for their intended purpose. ELT management is an issue of major concern in line with our focus on sustainability. Recovering ELTs leads to reduced waste. Moreover, it is a valuable resource for fuel or other material. As conscientious tire manufacturer, we wish to provide you with some guidelines about handling, storing, recycling, and recovering ELTs.

How to handle and store ELTs?

Store end-of-life tires in a place that is sheltered against rain, since the accumulation of rainwater would favor the breeding of mosquitoes inside the tire.

Likewise, end-of-life tires should not be stored on wetlands, flood plains, in ravines, or on any other steeply graded surface.

Open-air or uncontrolled burning in any place is harmful to the environment and is therefore forbidden by many legislations.

Lightening rods should be placed at a safe distance from tire piles.

Precautions must be taken against deliberate or accidental igniting of tire stock piles in the storage area.

Install an adequate number of fire-fighting devices. In addition, sand and dirt can be used to cover burning tires; whereas water can be used to wet unburned tires preventing ignition.

It is recommended to maintain an adequate buffer zone in the storage area in order to isolate any deliberate or accidental fire.

Provide for an emergency vehicle access road in each tire storage yard and between tire piles.

A tire is composed of several materials depending on the specific tire type; these include

46-48% rubber

25-28% carbon black


10-12% steel

10-12% oil and vulcanizing agents

3-6% synthetic yarns and textiles

End-of-life tire composition

TIRE LIFE-CYCLE

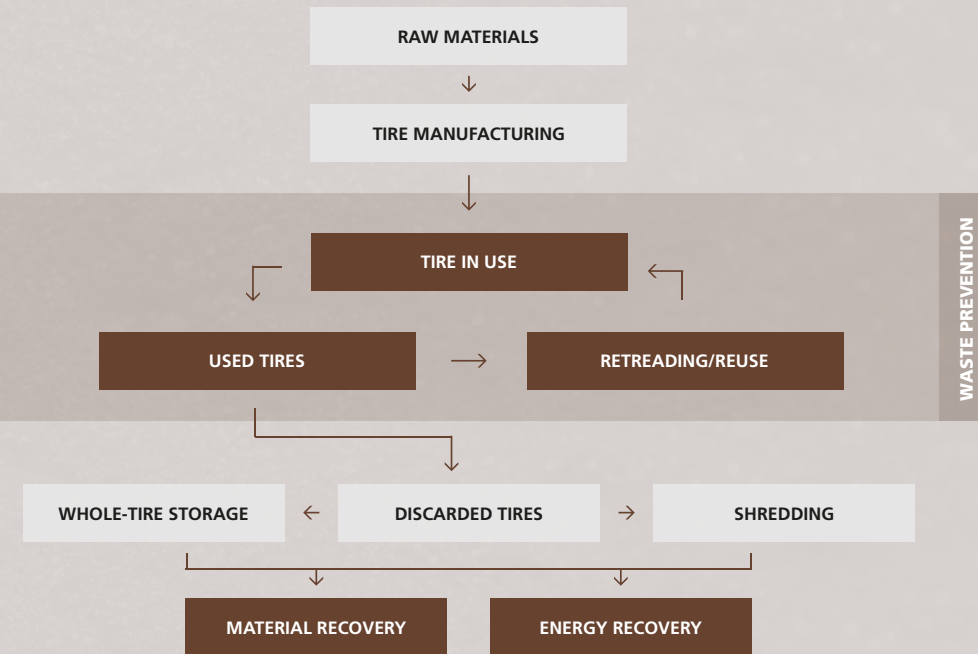

ELT recovery and recycling

When a tire reaches the ELT stage, a proper waste management system is to be applied. It is important that recovery and/or final disposal take place in an environmentally sound manner. ELTs can be destroyed ecologically using the materials obtained for other purposes.

Basically, an ELT can be divided into three product classes:

RUBBER GRANULES

STEEL INSERTS

SYNTHETIC YARN INSERTS AND TEXTILES



Recycling by transforming waste tires into rubber powder



FLOORING AND OTHER LOW-END RUBBER PRODUCTS



RECYCLED RUBBER SHEETS





(PARTIAL) SUBSTITUTION FOR RAW RUBBER PRODUCTS

Recycling process - pyrolysis

ELTs are separated into mainly oil, carbon black, hydrocarbon, and steel in special pyrolysis plants by means of thermal and chemical decomposition. Components can then be reused or recycled.

For what purposes can end-of-life tires be used?

ELTs can be a low-cost source of fuel when located near a major fuel consumer, such as a power plant or cement factory. They can also be readily processed for a diverse range of construction projects.

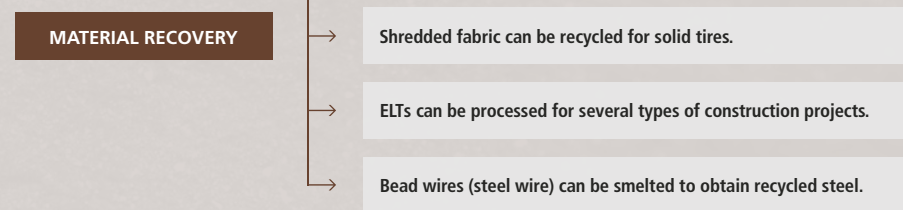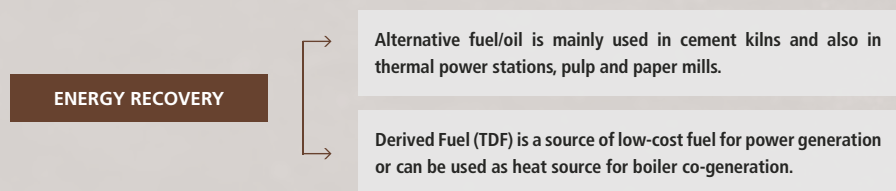



Notes

Two columns of horizontal dotted lines for taking notes.



Notes

Two columns of horizontal dotted lines for taking notes.



GROWING TOGETHER

PROUD SPONSOR OF:



OFFICIAL TIRE OF MONSTER JAM™



PREMIUM PARTNER



OFFICIAL OFF-HIGHWAY TIRE PARTNER OF THE KFC BBL



OFFICIAL PARTNER OF



SIX T-20 LEAGUE TEAMS

PRO KABADDI



TEAMS





GROWING TOGETHER

Corporate Office

Balkrishna Industries Ltd.

BKT HOUSE, C/15, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai - 400013, India
Tel: (+91) 22-6666 3800 - Fax: (+91) 22-6666 3898/99 - e-mail: info@bkt-tires.com - bkt-tires.com

BKT Europe srl

Viale Della Repubblica, 133
20831 Seregno (MB), Italy
Tel: (+39) 0362 33 03 28
(+39) 0362 32 51 07
Fax: (+39) 0362 23 24 72

BKT USA Inc.

202 Montrose West Ave. Suite 240
Copley, Ohio 44321
Tel: (+1) 330 836 1090
Fax: (+1) 330 836 1091
Toll Free: (+1) 888 660 0662

BKT Tires (CANADA) Inc.

55 York Street, Suite 401
Toronto, Ontario M5J 1R7, Canada
Tel: AG/IND (+1) 905 641 5636
OTR (+1) 780 888 5667
Fax: (+1) 416 229 1711



bkt-tires.com